

KOMPLETE KONTROL S-SERIES



 **NATIVE INSTRUMENTS**

THE FUTURE OF SOUND

The information in this document is subject to change without notice and does not represent a commitment on the part of Native Instruments GmbH. The software described by this document is subject to a License Agreement and may not be copied to other media. No part of this publication may be copied, reproduced or otherwise transmitted or recorded, for any purpose, without prior written permission by Native Instruments GmbH, hereinafter referred to as Native Instruments.

“Native Instruments”, “NI” and associated logos are (registered) trademarks of Native Instruments GmbH.

Ableton is a trademark of Ableton AG.

VST, HALion, Cubase, and Nuendo are registered trademarks of Steinberg Media Technologies GmbH. ASIO is a trademark and software of Steinberg Media Technologies GmbH.

Mac, macOS, GarageBand, Logic, iTunes and iPod are registered trademarks of Apple Inc., registered in the U.S. and other countries.

Windows, Windows Vista and DirectSound are registered trademarks of Microsoft Corporation in the United States and/or other countries.

All other trademarks are the property of their respective owners and use of them does not imply any affiliation with or endorsement by them.

Document authored by: Jan Ola Korte, Christian Schulz, Gustav Sto. Tomas, David Gover, and Nicolas Sidi

Software version: 2.0 (04/2018)

Hardware version: KOMPLETE KONTROL S-Series MK2

Special thanks to the Beta Test Team, who were invaluable not just in tracking down bugs, but in making this a better product.

NATIVE INSTRUMENTS GmbH

Schlesische Str. 29-30
D-10997 Berlin
Germany
www.native-instruments.de

NATIVE INSTRUMENTS North America, Inc.

6725 Sunset Boulevard
5th Floor
Los Angeles, CA 90028
USA
www.native-instruments.com

NATIVE INSTRUMENTS K.K.

YO Building 3F
Jingumae 6-7-15, Shibuya-ku,
Tokyo 150-0001
Japan
www.native-instruments.co.jp

NATIVE INSTRUMENTS UK Limited

18 Phipp Street
London EC2A 4NU
UK
www.native-instruments.co.uk

NATIVE INSTRUMENTS FRANCE SARL

113 Rue Saint-Maur
75011 Paris
France
www.native-instruments.com

SHENZHEN NATIVE INSTRUMENTS COMPANY Limited

203B & 201B, Nanshan E-Commerce Base Of
Innovative Services
Shi Yun Road, Shekou, Nanshan, Shenzhen
China
www.native-instruments.com



Table of Contents

1	Welcome to KOMPLETE KONTROL	11
1.1	Document Conventions	11
1.2	Box Contents	13
1.3	System Requirements	14
1.4	Accessibility	15
1.4.1	Keyboard Overview	15
1.4.2	Activating Accessibility Features	18
1.4.3	Training Mode	19
1.4.4	Feature Overview	19
2	New Features in KOMPLETE KONTROL 2.0	21
3	The KOMPLETE KONTROL Workflow	22
4	Setting up KOMPLETE KONTROL	24
4.1	Connecting the Keyboard to the Computer	25
4.2	Setting up the Stand-Alone Application	26
4.3	Setting up Host Integration	28
4.3.1	Setting up Apple Logic Pro X and GarageBand	29
4.3.2	Setting up Steinberg Cubase/Nuendo	29
4.3.3	Setting up Ableton Live (macOS)	30
4.3.4	Setting up Ableton Live (Windows)	32
4.4	Connecting Pedals to the Keyboard	34
4.5	Connecting External MIDI Equipment to the Keyboard	37
5	Software Overview	39
5.1	Header	40
5.2	Browser	42
5.2.1	Library Pane	43

5.2.2	Product Selector	45
5.2.3	Files Pane	47
5.3	Perform Panel	48
5.4	Plug-in Panel	49
5.5	Plug-in Chain Panel	49
5.6	MIDI Assignment Editor	50
5.7	Plug-in Area	52
6	Keyboard Overview	53
6.1	Perform and Edit Section	56
6.2	Transport Section	57
6.3	Control Section	58
6.4	Mode Buttons	59
6.5	Navigation and the 4-D Encoder	60
6.6	Keybed and Light Guide	61
6.7	Modulation Wheels	62
6.8	Touch Strip	63
6.9	Transpose and Fixed Velocity Buttons	64
7	Global Controls and Preferences	65
7.1	Instrument Views	65
7.1.1	Default View	66
7.1.2	Additional View	66
7.1.3	Edit View	68
7.2	Switching Instances	69
7.3	Transport and Tempo	71
7.3.1	Resetting the Clock	72
7.3.2	Adjusting Tempo	72

7.4	Adjusting Master Volume	73
7.5	Preferences	73
7.5.1	Preferences – Audio Page	74
7.5.2	Preferences – MIDI Page	77
7.5.3	Preferences – General Page	78
7.5.4	Preferences – Library Page	80
7.5.5	Preferences – Plug-ins Page	85
7.6	Keyboard Settings	88
7.7	Loading a Plug-in in Default State	89
8	MIDI Communication	91
8.1	Host Automation	92
8.1.1	Automation IDs for the Perform Panel	92
8.1.2	Recording Automation	93
8.2	Using the Keyboard in MIDI Mode	96
8.3	Using the Keyboard as Stand-Alone MIDI Controller	97
8.4	Using the MIDI Assignment Editor	99
8.4.1	The Mapping System	100
8.4.2	Assigning MIDI Messages to Control Elements	102
8.4.3	Renaming Control Elements	103
8.4.4	MIDI Message Types – Type Menu	104
8.4.5	Assignments for Knobs	105
8.4.6	Assignments for Buttons	106
8.4.7	Assignments for the Touch Strip	108
8.4.8	Assignments for Pedals (Switch)	108
8.4.9	Assignments for Pedals (Continuous)	110

9	Host Integration	111
9.1	Integration with MASCHINE	111
9.1.1	Basic Control Functions	112
9.1.2	Advanced Integration Control Functions	115
9.2	Integration with Apple Logic Pro X and GarageBand	123
9.3	Integration with Ableton Live	126
9.4	Integration with Steinberg Cubase and Nuendo	129
10	Browsing the Library	132
10.1	Browser Basics	132
10.1.1	Product Types: Instrument and Effect	132
10.1.2	About the Library and Meta-Information	133
10.1.3	Browsing the Library vs. Browsing Your Hard Disks	134
10.2	Opening the Browser	134
10.3	Overview of the Browser on the Keyboard	135
10.4	Choosing Between Factory Content and User Content	136
10.5	Loading an Instrument with its default Preset File	137
10.6	Filtering Instrument Preset Files by Bank	141
10.7	Resetting the Selection	143
10.8	Types and Modes Tag Filters	144
10.8.1	Filtering Preset Files by Types and Modes	147
10.8.2	Selecting Multiple Tags from the Same Level	151
10.9	Working with Favorites	151
10.9.1	Adding Preset Files to the Favorites	152
10.9.2	Displaying Favorites in the Results List	154
10.9.3	Removing Preset Files from the Favorites	155
10.10	Performing a Text Search	157

10.11	Displaying Preset File Information	157
10.12	Auditioning your Preset Files	158
11	Working with Effects	160
11.1	Opening the Plug-in Chain Panel	160
11.2	Adding Effects	161
11.3	Selecting Plug-in Slots	164
11.4	Reordering Effects	165
11.5	Scrolling the Plug-in Chain	166
11.6	Bypassing Effects	167
11.7	Removing Effects	169
12	Managing the Library	171
12.1	Saving Preset Files to the User Library	171
12.2	Deleting User Preset Files from the User Library	173
12.3	Editing the Tags and Properties of User Preset Files	174
12.4	Working with the Files Pane	177
12.4.1	Additional Results List Features List in the Files Pane	178
12.4.2	Navigating to File Locations with the Location Bar	179
12.4.3	Navigating to Recent File Locations	180
12.4.4	Working with File Location Favorites	180
12.5	Loading VST Plug-ins	182
12.6	Installing NKS Instruments	183
12.7	Importing KOMPLETE KONTROL-Compatible User Files	186
13	Controlling Instrument and Effect Parameters	188
13.1	About Pre-Mapped Instruments	188
13.2	Adjusting Parameters	188
13.3	Switching Parameter Pages	189

13.4	Customizing Parameter Mappings using the Plug-in Panel	189
14	Playing and Editing Scales and Chords	192
14.1	A Note about Music Theory	192
14.2	Activating the Scale Engine	193
14.3	Playing a Scale	194
14.4	Playing Chords	195
14.5	Editing Scales and Chords	196
14.6	Setting the Scale Parameters	197
14.6.1	Scale Root Note	197
14.6.2	Scale Bank and Type	198
14.7	Setting the Key Mode Parameter	205
14.8	Setting the Chord Parameters	207
14.8.1	Chord Mode	207
14.8.2	Chord Type	209
14.8.3	Chord Position	212
15	Playing and Editing the Arpeggiator	214
15.1	Playing Arpeggiator Sequences	215
15.2	Using a Sustain Pedal to Control the Arpeggiator	215
15.3	Using Arpeggiator Snapshots on the Keyboard	216
15.4	Editing the Arpeggiator	217
15.5	Setting the Main Parameters	218
15.5.1	Main Mode	218
15.5.2	Main Type	219
15.6	Setting the Rhythm Parameters	219
15.6.1	Rhythm Rate	220
15.6.2	Rhythm Sequence	221

15.6.3	Rhythm Swing	222
15.7	Setting the Other Parameters	222
15.7.1	Other Octaves	223
15.7.2	Other Dynamic	224
15.7.3	Other Gate	224
15.8	Setting the Advanced Parameters	224
15.8.1	Advanced Retrigger	225
15.8.2	Advanced Repeat	225
15.8.3	Advanced Offset	226
15.8.4	Advanced Inversion	226
15.9	Setting the Range Parameters	226
15.9.1	Range Min. Key	227
15.9.2	Range Max. Key	227
15.10	Setting the Hold Parameter	228
Index	229

1 Welcome to **KOMLETE KONTROL**

Thank you for choosing KOMLETE KONTROL!

The KOMLETE KONTROL software and its dedicated keyboard—the KOMLETE KONTROL S-Series—form a tightly integrated music production and performance system that brings all the sounds from KOMLETE and the Native Kontrol Standard (NKS) to the heart of your workflow.

KOMLETE KONTROL offers advanced integration with a number of hosts and provides full control of any Instruments supporting NKS, both from Native Instruments and partners. The keyboard lets you browse your Instruments and Effects in an intuitive way and play them creatively with KOMLETE KONTROL’s unique Scale engine and Arpeggiator.

We hope you enjoy this fantastic instrument as much as we do.

—The team at Native Instruments

1.1 Document Conventions

This document uses particular formatting to point out special facts and to warn you of potential issues. The icons introducing the following notes let you see what kind of information can be expected:



The speech bubble icon indicates a useful tip that may often help you to solve a task more efficiently.



The exclamation mark icon highlights important information that is essential for the given context.



The red cross icon warns you of serious issues and potential risks that require your full attention.

Furthermore, the following formatting is used:

- Text appearing in (drop-down) menus (such as *Open...*, *Save as...* etc.) in the software and paths to locations on your hard disk or other storage devices is printed in *italics*.
 - Text appearing elsewhere (labels of buttons, controls, text next to checkboxes etc.) in the software is printed in **blue**. Whenever you see this formatting applied, you will find the same text appearing somewhere on the screen.
 - Text appearing on the displays of the controller is printed in **light grey**. Whenever you see this formatting applied, you will find the same text on a controller display.
 - Text appearing on labels of the hardware controller is printed in **orange**. Whenever you see this formatting applied, you will find the same text on the controller.
 - Important names and concepts are printed in **bold**.
 - References to keys on your computer's keyboard you'll find put in square brackets (e.g., "Press [Shift] + [Enter]").
- ▶ Single instructions are introduced by this play button type arrow.
- Results of actions are introduced by this smaller arrow.

Naming Convention

Throughout the documentation we will refer to **KOMLETE KONTROL keyboard** (or just **keyboard**) as the hardware controller and **KOMLETE KONTROL software** as the software installed on your computer.

Unlabeled Buttons on the Keyboard

The buttons and knobs above and below the displays on the KOMLETE KONTROL keyboard do not have labels.



The unlabeled buttons and knobs on the KOMLETE KONTROL keyboard.

For better reference, we applied a special formatting here: throughout the document, the elements are capitalized and numbered, so the buttons above the displays are written Button 1 to Button 8, while the knobs under the displays are written Knob 1 to Knob 8.

1.2 Box Contents

The box contains the following items:

- Information flyer providing:
- the hardware **serial number** of the KOMLETE KONTROL keyboard
- a web link for downloading the **KOMLETE SELECT software bundle** (including KOMLETE KONTROL)
- **KOMLETE KONTROL keyboard**
- **Safety Instructions flyer**
- **USB cable**

1.3 System Requirements

For KOMPLETE KONTROL to fully function as intended, your system needs to meet certain requirements. The latest KOMPLETE KONTROL system requirements and compatibility information is available here:

www.native-instruments.com/products/komplete/keyboards/komplete-kontrol-s-series/specifications/

KOMPLETE

KOMPLETE KONTROL is optimized for use with KOMPLETE 11 SELECT, KOMPLETE 11 and KOMPLETE 11 ULTIMATE.

The latest KOMPLETE system requirements and compatibility information is available here:

www.native-instruments.com/products/komplete/bundles/komplete-11/specifications/

1.4 Accessibility

KOMLETE KONTROL offers a set of accessibility features for visually-impaired users. These are focused exclusively on the KOMLETE KONTROL keyboard itself and include speech output via your computer for the following features:

- Perform, Transpose, Page left / right buttons
- All Browser functions
- Instance switching
- The current edit mode, including the Plug-in panel and the Perform panel (Scale, Arp)
- Names of parameters and parameter sections when touching knobs, including all edit modes
- Tempo (KOMLETE KONTROL stand-alone application only)



Please note that the accessibility features for KOMLETE KONTROL S-Series MK2 are currently only available in macOS.



The accessibility features are particularly useful when combined with KOMLETE KONTROL's host integration and Apple VoiceOver in Apple Logic Pro X and GarageBand.

1.4.1 Keyboard Overview

The buttons and knobs on the KOMLETE KONTROL keyboard are organized in the following groups:

- Perform and Edit section
- Transport section
- Solo and Mute buttons
- Preset and Page buttons
- Arrange buttons (only functional in MASCHINE)

- Control section
- Navigation and Mode buttons
- 4-D encoder
- Transpose and Fixed Velocity buttons

The Perform and Edit section is located at the top left of the keyboard. It contains six buttons that are arranged in two rows.

The buttons in the first row are (from left to right):

- **SHIFT**
- **SCALE (Edit)**
- **ARP (Edit)**

The buttons in the second row are (from left to right):

- **UNDO (Redo)**
- **QUANTIZE**
- **AUTO**

The Transport section is located directly below the Perform and Edit section. It contains six buttons that are arranged in two rows.

The buttons in the first row are (from left to right):

- **LOOP**
- **METRO**
- **TEMPO**

The buttons in the second row are (from left to right):

- **PLAY (Restart)**
- **REC (Count-In)**
- **STOP**

The Solo and Mute buttons are located to the top right of the Perform and Edit section. The two buttons are arranged in a row.

The buttons are (from left to right):

- Mute
- Solo

The Preset and Page buttons are located to the bottom right of the Perform and Edit section, below the Solo and Mute buttons. The four buttons are arranged in a column.

The buttons are (from top to bottom):

- **PRESET** Up
- **PRESET** Down
- Page Left and Page Right (next to each other)

The Arrange buttons, which are only functional in MASCHINE, are located to the right of the Solo and Mute buttons and the Preset and Page buttons. The five buttons are arranged in a column.

The buttons are (from top to bottom):

- **SCENE**
- **PATTERN**
- **TRACK**
- **KEY MODE**
- **CLEAR**

The Control section is located in the center of the KOMPLETE KONTROL keyboard. It contains eight buttons and eight knobs. The buttons are arranged in a row at the very top of the keyboard. The knobs are arranged in a row directly above the keyboard.

The Navigation and Mode buttons are on the top right of the KOMPLETE KONTROL keyboard. The six buttons are arranged in two rows.

The buttons in the first row are (from left to right):

- **BROWSER**
- **PLUG-IN**
- **MIXER**

The buttons in the second row are (from left to right):

- **INSTANCE**
- **MIDI**
- **SETUP**

The 4-D encoder is located directly below the Navigation and Mode buttons.

The Transpose and Fixed Velocity buttons are located at the far left of the keyboard next to the keyboard and directly above the Pitch and Modulation wheels. The three buttons are arranged in a row.

The buttons are (from left to right):

- **FIXED VEL (TS Mode)**
- **OCT** Down
- **OCT** Up

1.4.2 Activating Accessibility Features

In order to activate or deactivate the accessibility features from the KOMLETE KONTROL keyboard while the KOMLETE KONTROL software is running:

1. Press and hold the **SHIFT** button on the top left of the keyboard.
2. While holding **SHIFT** press the **MIXER** button on the top right of the keyboard.

→ The accessibility features are activated or deactivated.

When the accessibility features are activated, you can choose whether or not speech output should be enabled for names of Preset files while browsing:

1. Press and hold the **SHIFT** button on the top left of the keyboard.
2. While holding **SHIFT** press Button 5 in the Control section.

→ Speech output for names of Preset files while browsing is enabled or disabled.



The accessibility features are designed to be used with the KOMLETE KONTROL plug-in. However, the KOMLETE KONTROL stand-alone application must be opened after initial installation and after installing additional Instruments and Effects. This will ensure that all Instruments and Effects are displayed correctly in the KOMLETE KONTROL Browser.

1.4.3 Training Mode

KOMLETE KONTROL Training Mode makes it easy to locate a specific button or parameter without accidentally triggering an action. When Training Mode is activated, all button presses and parameter names are announced but the corresponding action is not triggered.

- ▶ To activate or deactivate Training Mode from the KOMLETE KONTROL keyboard while the KOMLETE KONTROL software is running, double-press the **SHIFT** button on the top left of the keyboard.



Training Mode is only available when the accessibility features have been activated.

1.4.4 Feature Overview

The following table outlines the availability of accessibility features for different aspects of KOMLETE KONTROL from both the KOMLETE KONTROL keyboard and the KOMLETE KONTROL software.

	Feature	Accessible from Key-board
Accessibility	Enable and disable Accessibility mode	Yes
Browser	Browse for Factory and User Preset files	Yes
	Switch between Category and Vendor sorting	Yes
	Set or sort by Favorites	Yes
	Save and edit User Preset files	No
	Browse for NKS plug-ins from other vendors	Yes
Instrument control	Adjust key Instrument parameters	Yes
	Custom map Instrument parameters	No
Smart Play	Adjust Scale & Chord parameters	Yes
	Adjust Arp parameters	Yes
Touch Strips	Adjust Touch Strip parameters	No
Tempo	Adjust BPM	Yes
Training mode	Find a control without accidentally triggering actions	Yes
Preferences	Adjust software & hardware preferences	No
Software dialog	Be notified if a dialog box opens in the software (dialog content is not available for speech output)	Yes



Accessibility for KOMLETE KONTROL's host integration is only available when using Apple Voice-Over in Logic Pro X and GarageBand. For more information about KOMLETE KONTROL's host integration features, refer to [↑9, Host Integration](#).

2 New Features in KOMPLETE KONTROL 2.0

The release of KOMPLETE KONTROL 2.0 brings the following new features, improvements, and changes:

NKS Effect and VST Effect Support

KOMPLETE KONTROL now supports NKS Effects and VST Effects. In addition to the loaded Instrument you can load Effects to further tweak your sound. The Effects are arranged in a horizontal series inside the new Plug-in chain. The NKS Effect parameters are mapped to the keyboard's controls and can be customized. All NKS Effects are fully accessible to visually-impaired users via KOMPLETE KONTROL S-Series keyboards.

For more information about the Plug-in chain and working with Effects, refer to [↑5.5, Plug-in Chain Panel](#) and [↑11, Working with Effects](#) respectively.

Mute and Solo State Indicators in Mixer view when used in DAW

For advanced Host Integration Mute and Solo state indicators are now visible in the Mixer view when using with Logic Pro X, GarageBand, Ableton Live, Cubase and Nuendo.

Ableton Live Host Integration Change

After updating the KOMPLETE KONTROL application to version 2.0 you need to set up Ableton Live Host Integration again due to a change in the Integration design. For more information, refer to [↑4.3.3, Setting up Ableton Live \(macOS\)](#) or [↑4.3.4, Setting up Ableton Live \(Windows\)](#) respectively.

3 The **KOMLETE KONTROL** Workflow

KOMLETE KONTROL brings all the sounds from KOMLETE and the Native Kontrol Standard (NKS) to the heart of your workflow. Its advanced integration in a number of hosts enables you to quickly capture ideas, with immediate access to the sounds you need—all directly from the KOMLETE KONTROL keyboard.

The KOMLETE KONTROL workflow is streamlined to remove any obstacles when sketching out a new song in a supported host:

1. Select a track that hosts the KOMLETE KONTROL plug-in with the navigation controls on the keyboard. This is made possible by KOMLETE KONTROL's advanced host integration.
 2. Find a Preset file you like from any of the Instruments in your KOMLETE KONTROL Library by browsing with the keyboard, supported by the Browser's filters and Preview functions.
 3. Use the keyboard's Control section to adjust the loaded Instrument and create your own unique sound.
 4. Optionally, you can enable KOMLETE KONTROL's Smart Play features to enrich your playing with the Scale engine and the Arpeggiator.
 5. Record a new clip in the host, conveniently controlling transport and loop functions directly from the keyboard. Again, made possible by KOMLETE KONTROL's advanced host integration.
 6. If you need to start over, undo and redo functions are right at your fingertips. To further refine your recording, you can apply quantization and automation to a clip by pressing the corresponding buttons on the keyboard.
- You have quickly captured a musical idea and can continue sketching out a new song by repeating the process and layering more tracks.

Key Features

The following key features facilitate the KOMLETE KONTROL workflow:

- **Host integration:** Advanced integration in a number of hosts allows you control core functionality directly from the keyboard. For more information, refer to [↑4.3, Setting up Host Integration](#) and [↑9, Host Integration](#).
- **Browser:** The Browser is your interface for finding, loading and organizing Instruments, Effects, and Preset files from the KOMPLETE KONTROL Library. For more information, refer to [↑10, Browsing the Library](#), [↑11, Working with Effects](#), and [↑12, Managing the Library](#).
- **Instrument control:** The Touch Strip and knobs on the keyboard are pre-mapped to all KOMPLETE and NKS Instruments and Effects for immediate control. For more information, refer to [↑13, Controlling Instrument and Effect Parameters](#) and [↑8.4.7, Assignments for the Touch Strip](#).
- **Smart Play:** The Scale engine and the Arpeggiator let you play and generate scales, chords, and arpeggiator sequences. For more information, refer to [↑14, Playing and Editing Scales and Chords](#) and [↑15, Playing and Editing the Arpeggiator](#).

4 Setting up KOMplete KONTROL

This section provides basic setup information and guides you through the process of integrating KOMplete KONTROL with supported hosts.

The KOMplete KONTROL software is installed both as a stand-alone application as well as a VST, Audio Unit, and AAX plug-in.



The KOMplete KONTROL stand-alone application must be opened once before using the plug-in within your DAW for the first time, and after installing new Instruments and Effects.

The KOMplete KONTROL stand-alone application directly communicates with your audio and MIDI interfaces, which you can configure in the KOMplete KONTROL Preferences. When KOMplete KONTROL is used as a plug-in within a host, the communication with your audio and MIDI interfaces is managed by the host.




For details about the audio and MIDI configuration of the host, and how to load plug-ins, please refer to its documentation.

4.1 Connecting the Keyboard to the Computer

To connect the KOMPLETE KONTROL keyboard to your computer:

1. Attach the device end of the included USB cable to the USB socket on the rear panel of the keyboard.
2. Attach the computer end of the USB cable to an available USB 2.0 (or later) port on your computer.

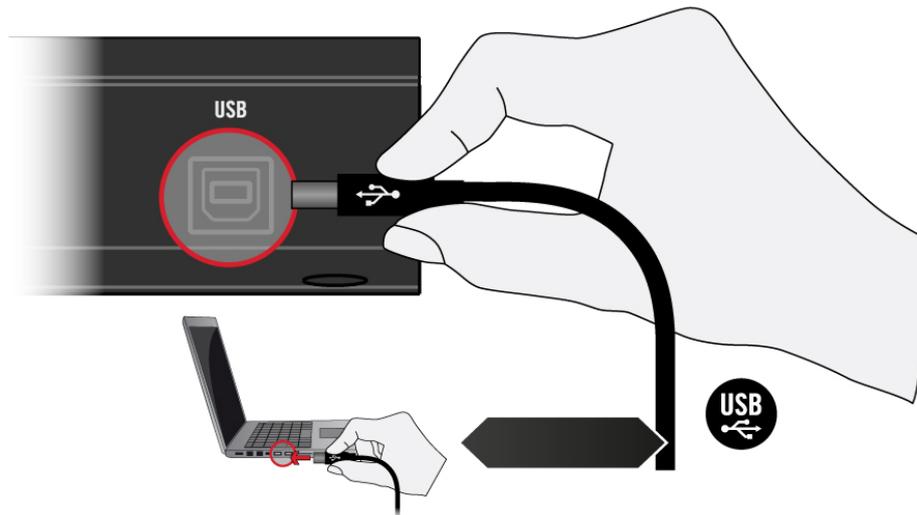

3. Press the power switch on the rear panel of the keyboard to switch it on.

→ The keyboard is now detected by the operating system.



Non-powered USB hubs are not supported. The keyboard should always be connected directly to the USB port of the computer, or be used with a powered USB hub.


4.2 Setting up the Stand-Alone Application

When you launch the KOMPLETE KONTROL software from its installation directory, it starts as a stand-alone application independently from a host.

By default, the application uses the standard audio interface of your computer. In order to use another audio interface, and receive MIDI notes from the keyboard, you need to configure the application in its Preferences.

Configuring Audio Interface


1. In the Main menu click on *Edit > Preferences* to open the [Preferences](#).
2. Click on [Audio](#) to display the [Audio](#) page.
3. Select the hardware driver supported by your audio interface from the [Driver](#) drop-down menu.
4. Select the audio interface from the [Device](#) drop-down menu.
5. Select the left and right output channels of your audio interface you want to use for KOMPLETE KONTROL's master output in the [Complete Kontrol Out 1 L](#) and [Complete Kontrol Out 1 R](#) drop-down menus under [Routings](#).

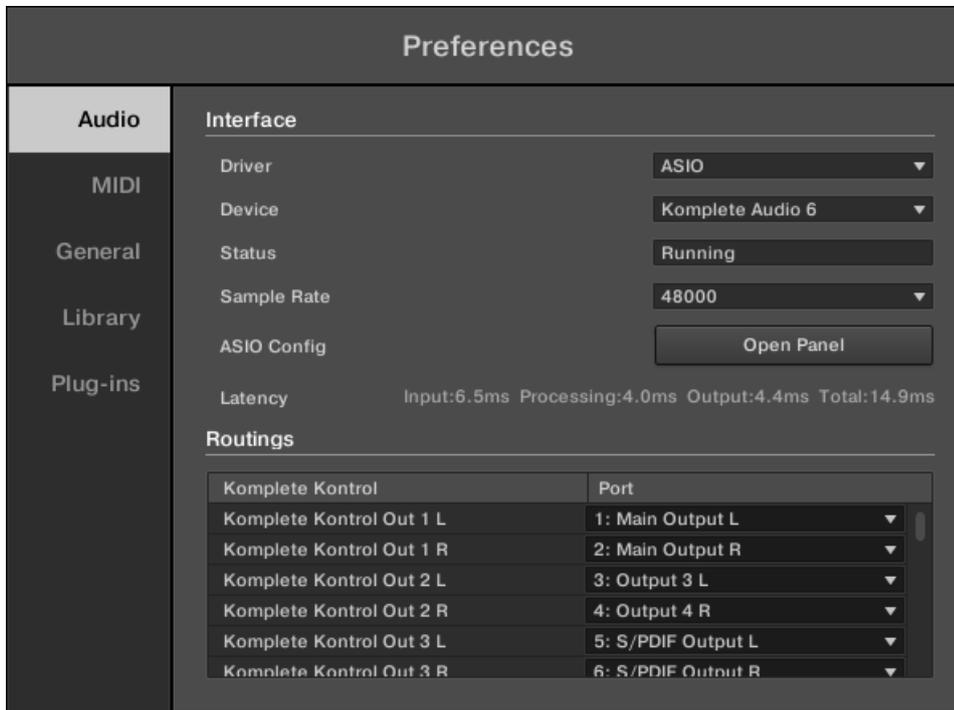

Preferences panel — Audio page

Enabling MIDI Control

1. Click on [MIDI](#) to display the [MIDI](#) page.
2. Click on [Input](#) to display the available devices for incoming MIDI signals.
3. Click the [Complete Kontrol](#) checkboxes to activate incoming MIDI signals from the keyboard.

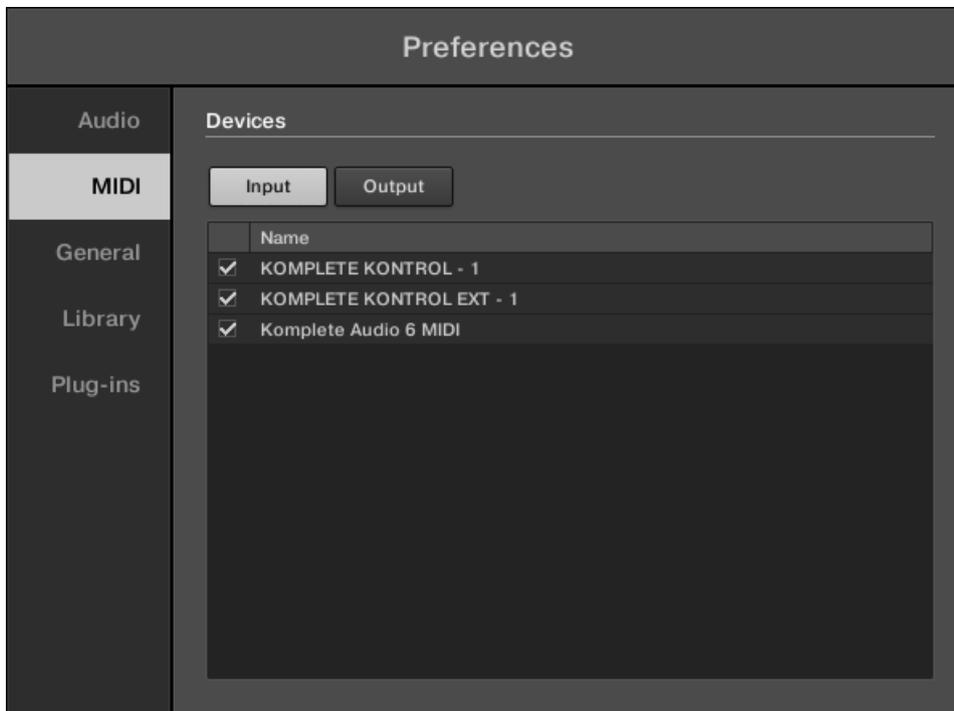

Preferences panel — MIDI page (entries may vary on your computer)

→ The software is configured and ready to be controlled with the keyboard.



The MIDI **Output** settings are required for using KOMplete KONTROL's Smart Play features with other MIDI instruments.

4.3 Setting up Host Integration

KOMplete KONTROL integrates with a number of hosts to facilitate a fluent workflow for performing and recording music with your KOMplete KONTROL Library.

Advanced integration of KOMplete KONTROL is available in the following hosts:

- MASCHINE 2

- Apple Logic Pro X
- Apple GarageBand
- Ableton Live 9
- Steinberg Cubase Artist 8.5/9/9.5
- Steinberg Cubase Pro 8.5/9/9.5
- Steinberg Nuendo 7/8

Before using the KOMLETE KONTROL keyboard to control a supported host, a few configuration steps are required:

4.3.1 Setting up Apple Logic Pro X and GarageBand

Apple Logic Pro X and GarageBand are automatically configured for advanced integration with KOMLETE KONTROL once you launch the respective application for the first time after installing the KOMLETE KONTROL software. Ensure that the keyboard is connected and switched on before launching the application.

A dialog asks you to confirm this after launching the application:

- ▶ When the message [OSC app “KOMLETE KONTROL S-Series”](#) wants to connect to Logic Pro X / GarageBand appears on screen, click **OK**.



The KOMLETE KONTROL stand-alone application must be opened once before using the plug-in within your DAW for the first time, and after installing new Instruments and Effects.

For a detailed overview of Integration controls for Logic Pro X/GarageBand refer to [↑9.2, Integration with Apple Logic Pro X and GarageBand](#)

4.3.2 Setting up Steinberg Cubase/Nuendo

Steinberg Cubase/Nuendo must be configured for advanced integration with KOMLETE KONTROL.

1. Ensure that the keyboard is connected and switched on before launching the application.
2. Launch Steinberg Cubase/Nuendo.

3. In Steinberg Cubase/Nuendo, open the *Device Setup*. from the [Devices](#) menu (Steinberg Cubase 9.5: *Studio Setup* from the [Studio](#) menu).
4. Click the + button in the upper left corner of the [Device Setup](#) and select *Komplete Kontrol S-Series* from the drop-down menu.
5. Set [MIDI Input](#) and [MIDI Output](#) for [Komplete Kontrol S-Series](#) to the ports named *Komplete Kontrol DAW* (macOS) / *KOMLETE KONTROL* (not *KOMLETE KONTROL EXT*, Windows).

→ Steinberg Cubase Nuendo is now ready to be used with KOMLETE KONTROL.



The KOMLETE KONTROL stand-alone application must be opened once before using the plug-in within your DAW for the first time, and after installing new Instruments and Effects.

For a detailed overview of Integration controls for Steinberg/Nuendo refer to [↑9.4, Integration with Steinberg Cubase and Nuendo](#).

4.3.3 Setting up Ableton Live (macOS)

Ableton Live must be configured for advanced integration with KOMLETE KONTROL.

Installing the MIDI Remote Script

The MIDI Remote Script allows Ableton Live to recognize KOMLETE KONTROL as a control surface. It must be copied into Live's MIDI Remote Scripts directory:

1. Ensure that Ableton Live is not running.
2. Navigate to the following folder: *Macintosh HD/Library/Application Support/Native Instruments/Host Integration/Ableton Live/*
3. Copy the [_NativeInstruments](#) folder, as well as the [Komplete_Kontrol_Mk2](#) folder to the clipboard.
4. Open your [Applications](#) folder and right-click the Ableton Live application symbol. In the context menu, click *Show Package Contents*.
5. In the Ableton Live package, navigate to *Contents > App-Resources > MIDI Remote Scripts*.

6. Paste the folders you have copied to the clipboard into the *MIDI Remote Scripts* folder.

Installing the KOMplete KONTROL Instrument Racks

KOMplete KONTROL is loaded into Ableton Live in the form of an Instrument Rack. In order to make the required Instrument Rack available in Ableton Live's browser, it must be added to your Ableton Live User Library:

1. Navigate to the following folder: *Macintosh HD/Library/Application Support/Native Instruments/Host Integration/Ableton Live/*
2. Copy the **KOMplete KONTROL VST.adg** file to the clipboard.
3. Paste the file you have copied to the clipboard into your Ableton Live Instrument Rack folder. By default this folder is located here: *Macintosh HD/Users/*Username*/Music/Ableton/User Library/Presets/Instruments/Instrument Rack/*

Configuring Ableton Live for KOMplete KONTROL

Once the MIDI Remote Script and the Instrument Rack file are installed in the correct location, you need to add KOMplete KONTROL as a control surface in Ableton Live's preferences.

1. Launch Ableton Live.
2. In Ableton Live, go to the *Preferences* and open the **MIDI / Sync** tab.
3. Assign a free **Control Surface** slot to KOMplete KONTROL by selecting *KOMplete KONTROL MK2* from the drop-down menu.
4. Leave both the **Input** and the **Output** for the *KOMplete KONTROL* control surface set to *None*.

Loading KOMplete KONTROL in Ableton Live



The KOMplete KONTROL stand-alone application must be opened once before using the plug-in within your DAW for the first time, and after installing new Instruments and Effects.

1. Ensure that the keyboard is connected and switched on.

2. To load KOMLETE KONTROL in Ableton Live, drag the KOMLETE KONTROL Instrument Rack from the browser to an empty MIDI track. You can find it here in the Ableton Live browser: *Instruments/Instrument Rack/KOMLETE KONTROL VST.adg*

→ You are now ready to use KOMLETE KONTROL within Ableton Live.



You must use the KOMLETE KONTROL Instrument Rack (*KOMLETE KONTROL VST.adg*) to ensure a reliable connection with the KOMLETE KONTROL keyboard.

For a detailed overview of Integration controls for Ableton Live refer to [↑9.3, Integration with Ableton Live](#).

4.3.4 Setting up Ableton Live (Windows)

Ableton Live must be configured for advanced integration with KOMLETE KONTROL.

Installing the MIDI Remote Script

The MIDI Remote Script allows Ableton Live to recognize KOMLETE KONTROL as a control surface. It must be copied into Live's MIDI Remote Scripts directory:

1. Ensure that Ableton Live is not running.
2. Navigate to the following folder: *C:\Program Files\Common Files\Native Instruments\Host Integration\Ableton Live*
3. Copy the *_NativeInstruments* folder, as well as the *Komplete_Kontrol_Mk2* folder to the clipboard.
4. Navigate to the MIDI Remote Scripts folder in Ableton Live's installation directory: *C:\ProgramData\Ableton\Live 9\Resources\MIDI Remote Scripts*
5. Paste the folders you have copied to the clipboard into the *MIDI Remote Scripts* folder.

Installing the KOMLETE KONTROL Instrument Racks

KOMLETE KONTROL is loaded into Ableton Live in the form of an Instrument Rack. In order to make the required Instrument Rack available in Ableton Live's browser, it must be added to your Ableton Live User Library:

1. Navigate to the following folder: *C:\Program Files\Common Files\Native Instruments\Host Integration\Ableton Live*
2. Copy the **KOMplete KONTROL VST.adg** file to the clipboard.
3. Paste the file you have copied to the clipboard into your Ableton Live Instrument Rack folder. By default this folder is located here: *C:\Users*Username*\Documents\Ableton\User Library\Presets\Instruments\Instrument Rack*

Configuring Ableton Live for KOMplete KONTROL

Once the MIDI Remote Script and the Instrument Rack file are installed in the correct location, you need to add KOMplete KONTROL as a control surface in Ableton Live's preferences.

1. Launch Ableton Live.
2. In Ableton Live, go to the *Preferences* and open the **MIDI / Sync** tab.
3. Assign a free **Control Surface** slot to *KOMplete KONTROL* by selecting it from the drop-down menu.
4. Leave both the **Input** and the **Output** for the *KOMplete KONTROL* control surface set to *None*.

Loading KOMplete KONTROL in Ableton Live



The KOMplete KONTROL stand-alone application must be opened once before using the plug-in within your DAW for the first time, and after installing new Instruments and Effects.

- ▶ To load KOMplete KONTROL in Ableton Live, drag the KOMplete KONTROL Instrument Rack (*KOMplete KONTROL VST.adg*) from the browser to an empty MIDI track. You can find it here in the Ableton Live browser: *Instruments/Instrument Rack/KOMplete KONTROL VST.adg*

For a detailed overview of Integration controls for Ableton Live refer to [↑9.3, Integration with Ableton Live](#).

4.4 Connecting Pedals to the Keyboard

The **KOMLETE KONTROL** keyboard provides you two pedal inputs (in the form of 1/4" sockets) on its rear panel: **PEDAL A** and **PEDAL B**.



The pedal inputs on the rear panel of the keyboard.

These inputs both allow you to connect either a continuous or a switch pedal in order to further refine your performance. They can be freely configured for sustain or expression behavior.



You can define the MIDI messages assigned to the pedal inputs in **KOMLETE KONTROL**'s MIDI Assignment editor. For more information, refer to [↑8.4, Using the MIDI Assignment Editor](#).

Connecting Pedals

- ▶ Connect a continuous or switch pedal to the **PEDAL A** or **PEDAL B** inputs on the rear panel of the keyboard.


Configuring the Pedal Input for a Sustain Pedal

When a switch pedal is connected:


1. Click the MIDI Assignment editor button in the Header to open the MIDI Assignment editor.




2. Select the control element type **PEDALS**.




3. Select the pedal input you want to configure, either [Pedal A](#) or [Pedal B](#).



4. Select *Switch* from the [Mode](#) drop-down menu.

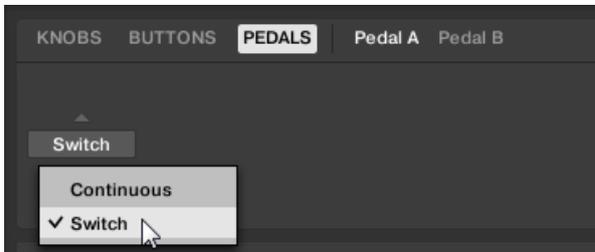

5. Depending on inverted tip/ring connectivity of the pedal, select either [Tip](#) or [Ring](#).

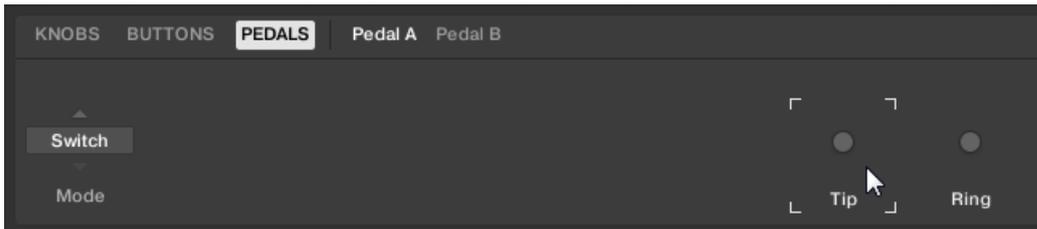

→ The pedal input is configured for a switch pedal with sustain behavior. If you need to change the MIDI Control Change message assigned to the pedal input, refer to [↑8.4, Using the MIDI Assignment Editor](#).


Configuring the Pedal Input for an Expression Pedal

When a continuous pedal is connected:


1. Click the MIDI Assignment editor button in the Header to open the MIDI Assignment editor.




2. Select the control element type **PEDALS**.




3. Select the pedal input you want to configure, either **Pedal A** or **Pedal B**.



4. Select *Continuous* from the **Mode** drop-down menu.

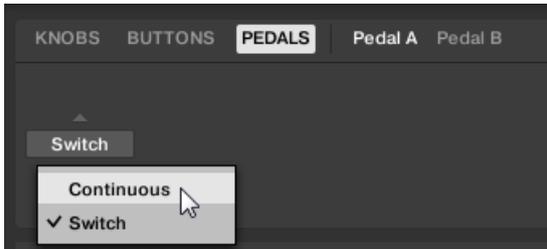

→ The pedal input is configured for a continuous pedal with expression behavior. If you need to change the MIDI Control Change message assigned to the pedal input, refer to [↑8.4, Using the MIDI Assignment Editor](#).

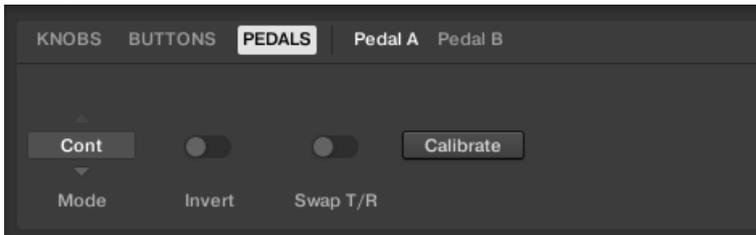

Depending on the type of pedal, you need to make further adjustments by using the provided options. The following table gives you an overview of these options:

Option	Description
Invert toggle switch	Some continuous pedals internally support the inverted pedal range but cannot be configured on the pedal directly. The Invert Range function allows you to invert the range of the pedal connected to the keyboard.
Swap T/R toggle switch	Allows you to use pedals with inverted tip/ring connectivity.
Recalibrate button	Allows you to recalibrate the input.



When using the MIDI Assignment editor, all keyboard controls (i.e. navigation, transport, etc.) are blocked.

4.5 Connecting External MIDI Equipment to the Keyboard

The KOMPLETE KONTROL keyboard has dedicated MIDI sockets that allow you to directly connect other MIDI devices using a 5-pin DIN MIDI cable and integrate the keyboard into your MIDI setup.



The MIDI sockets on the rear panel of the KOMPLETE KONTROL keyboard.

To connect your external MIDI equipment:

1. Connect the device receiving MIDI signals to the **MIDI OUT** socket on the rear panel of the keyboard using a 5-pin DIN MIDI cable.
2. Connect the device sending MIDI signals to the **MIDI IN** socket on the rear panel of the keyboard using a 5-pin DIN MIDI cable.


→ The MIDI equipment is connected.

Depending on your use case, additional configuration is required in the software:

- If KOMPLETE KONTROL is running as a stand-alone application, you need to activate the corresponding MIDI inputs and outputs of the keyboard on the [MIDI](#) page of the [Preferences](#). For more information refer to [↑8.3, Using the Keyboard as Stand-Alone MIDI Controller](#).
- If KOMPLETE KONTROL is running as a plug-in in a host, the MIDI configuration is managed by the host. For more information refer to [↑8.2, Using the Keyboard in MIDI Mode](#).
- If you are using the keyboard as MIDI controller without a USB connection, MIDI data is directly sent and received via the keyboard's [MIDI IN](#) and [MIDI OUT](#) sockets. For detailed information on MIDI mapping refer to [↑8.4, Using the MIDI Assignment Editor](#).

5 Software Overview

This section gives an overview of the areas and controls of the KOMLETE KONTROL software.

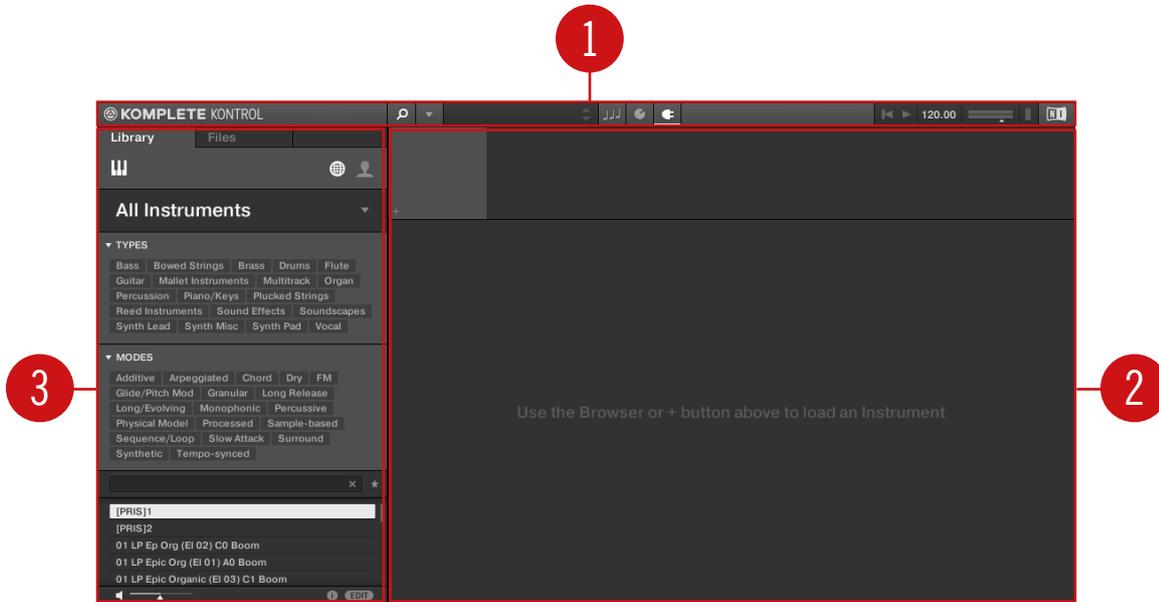

Overview of the KOMLETE KONTROL software.


(1) **Header:** Provides access to general functions like the Main menu, the Preset display, the Transport and Master Volume controls, as well as options to show and hide user interface areas. For more information, refer to [↑5.1, Header](#).

(2) **Plug-in area:** Shows your loaded Instrument or Effect and lets you control it directly in the software. For more information, refer to [↑5.7, Plug-in Area](#).

(3) **Browser:** Lets you browse for Instruments and Effects, and manage all your Preset files. For more information, refer to [↑5.2, Browser](#).

5.1 Header

The header is where you find general settings that affect COMPLETE KONTROL globally. It also lets you access additional user interface areas.

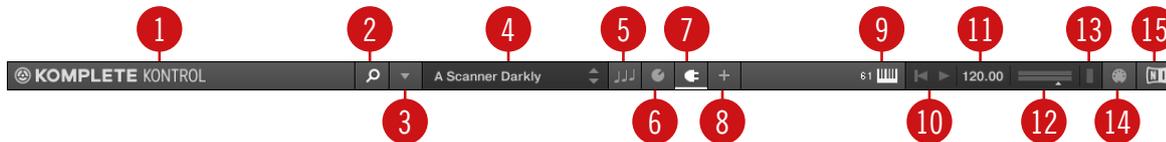

The header.

(1) **KOMPLETE KONTROL logo:** Opens the About screen, which shows the version number of the KOMPLETE KONTROL software.

(2) **Browser button:** Shows or hides the Browser.

(3) **Main menu:** Opens the Main menu, which contains a number of general functions and settings, including the Preferences.

(4) **Preset display:** Displays the name of the loaded Preset file or KONTAKT key switch. The arrow buttons on the right skip to the next Preset file in the Browser's result list.

(5) **Perform panel button:** Shows or hides the Perform panel, which gives you access to the parameters of the Scale engine and the Arpeggiator. The Perform panel button lights up blue when the Scale engine and/or the Arpeggiator are enabled.

(6) **Plug-in panel button:** Shows or hides the Plug-in panel, which allows you to customize the parameter mapping for the Control section on the keyboard for every Preset file.

(7) **Plug-in chain panel button:** Shows or hides the Plug-in chain panel and lights up white when enabled.

(8) **View button:** Switches between Default view and Additional view of the loaded Instrument. The View button only appears if the loaded Instrument contains an Additional view. The View button is not available when an Effect is selected.

(9) **Keyboard button:** Shows the currently connected keyboard, S25, S49, S61, or S88. If multiple instances of the KOMPLETE KONTROL software are running (for example in a host), clicking the button connects the keyboard to this instance. This indicator only appears if at least one compatible device is connected.

(10) **Transport controls:** Lets you start, stop, and reset the internal clock. When KOMPLETE KONTROL is loaded as a plug-in in a host, the transport automatically follows the host transport and this feature is greyed out.

(11) **Tempo control:** Lets you adjust the tempo in BPM (beats per minute).

(12) **Master Volume control:** Lets you adjust the overall output volume of KOMPLETE KONTROL. The meter shows the current peak level of the output signal.

(13) **CPU meter:** Represents the current load on your computer's processor; it should not go above 70% to avoid clicks and interruptions.

(14) **MIDI Assignment editor button:** Lets you to access all the settings related to the keyboard's MIDI mode, as well as pedals. This button only appears in the KOMPLETE KONTROL stand-alone application.

(15) **NI logo:** The NI logo opens the About screen, which shows the version number of the KOMPLETE KONTROL software.


5.2 Browser

The Browser gives you access to your KOMPLETE KONTROL Library and lets you add, edit, and organize Preset files. It consists of the Library pane together with the Product selector, and of the Files pane which are explained in the following overviews.

For more information on using the Browser and managing your Preset files, refer to [↑10, Browsing the Library](#), [↑11, Working with Effects](#), respectively [↑12, Managing the Library](#).

5.2.1 Library Pane

The **Library** pane is the place where you browse for Instruments, Effects, and Preset files. It consists of the following elements:

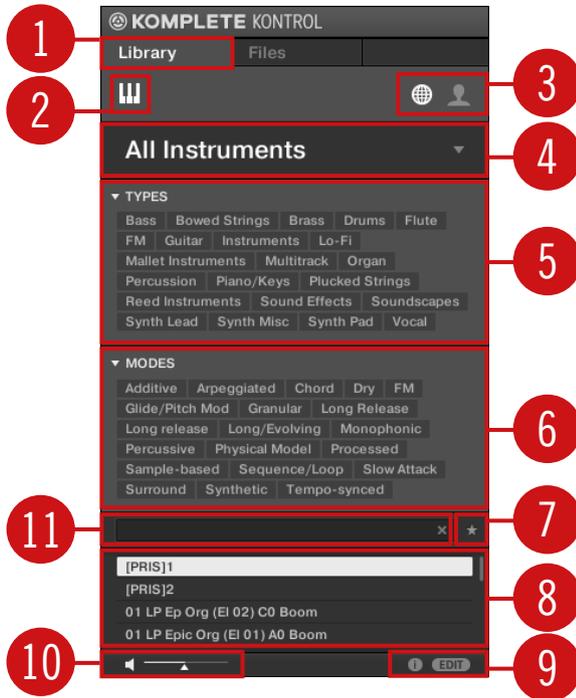

The **Library** pane.

(1) **Library**: Displays the Library pane.

(2) **Product Type icon**: Displays the current context either of browsing for Instruments or browsing for Effects. This is determined automatically by the currently selected Plug-in slot in the Plug-in chain. For more information on switching between Product Types, refer to [↑10.1.1, Product Types: Instrument and Effect](#).

(3) **Content selector**: The Globe icon selects factory content and the User icon selects user content. Only Preset files of the selected content type are displayed in the results list (7).

(4) **Product selector:** Selects a particular Instrument or Effect, Instrument category, and bank of the selected Instrument. Only Preset files matching your selection are displayed in the results list (7).

(5) **TYPES:** Lets you browse for Preset files based on Type and Sub-Type tags that have been applied to them. You can collapse or expand this section by clicking on the little arrow next to **TYPES**.

(6) **MODES:** Lets you browse for Preset files based on Mode tags that have been applied to them. You can collapse or expand this section by clicking on the little arrow next to **MODES**.

(7) **Favorites:** Lets you filter the search results by Favorites. When enabled, only favorite Preset files are displayed in the results list (7).

(8) **Results list:** Displays all Preset files that match your entered search criteria.

(9) **Control bar:** Provides useful tools when browsing and editing the KOMPLETE KONTROL Library:


- The **Information button** (i) displays additional information for the selected Preset files.
- The **EDIT** button opens the **Attribute editor** for displaying and editing the tags and properties of the selected Preset files.

(10) **Prehear controls:** Lets you audition Preset Files.

(11) **Search field:** Lets you perform a text search.

5.2.2 Product Selector

When browsing for Instruments or Effects the Product selector allows you to limit your search to a certain category, a particular Product, and Banks of Instruments.

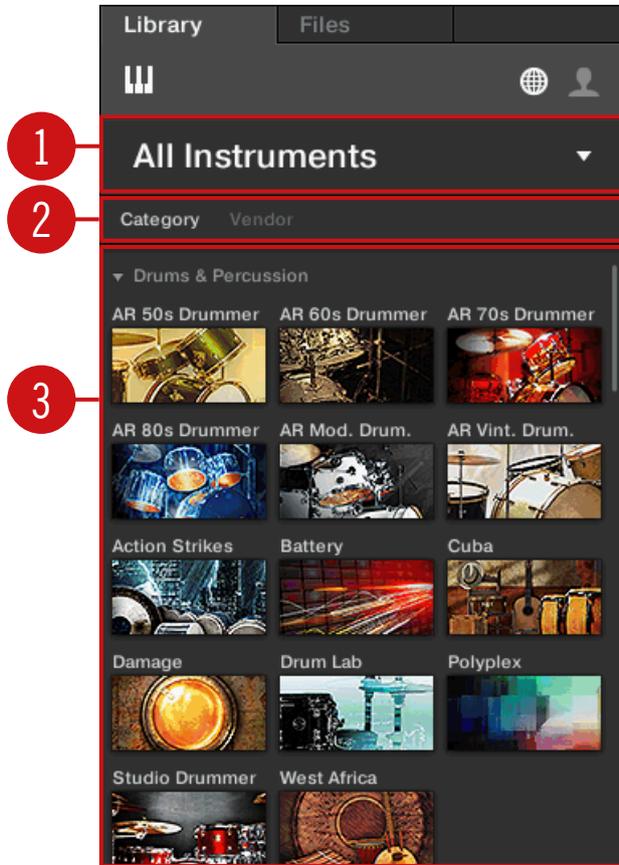


The Product selector.

(1) **Product selector header:** The header shows the selected Product—if there is no selection it shows a generic label ([All Instruments](#) or [All Effects](#)). A Click on the header opens or closes the Product selector.

- (2) **Category / Vendor selector:** Allows you to sort the Product list by [Category](#) or by [Vendor](#).
- (3) **Product list:** Shows all Products that are available in your KOMLETE KONTROL Library.

5.2.3 Files Pane

The **Files** pane contains following elements:

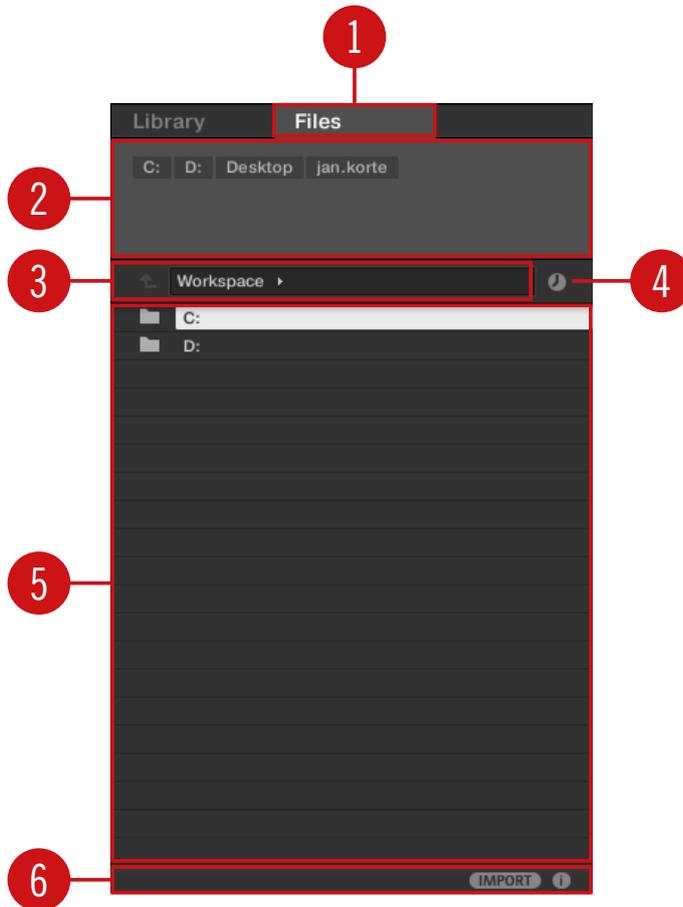

The **Files** pane in the Browser.

(1) **Files**: Displays the **Files** pane.

(2) **Favorite bar**: Displays all your favorite folders. A click on any favorite folder lets you jump directly to that particular path and display its content in the Result list (5).

(3) **Location bar:** Displays the selected path. The Location bar provides various tools to quickly navigate your file system.

(4) **Recent Locations button:** Opens a list of the last visited locations for quickly jumping to any of them.


(5) **Results list:** Displays the content (files and folders) of the folder shown in the Location bar. Only files compatible with KOMLETE KONTROL are displayed.

(6) **Control bar:** Provides useful tools when browsing your file system:

- The **Information button** (i) displays additional information for the selected files.
- The **IMPORT** button lets you import the content of the selected folder to the KOMLETE KONTROL Library. Before any files are imported, you can choose which tags will be assigned to the files in the **Attribute editor**.

5.3 Perform Panel

The Perform panel lets you access all the parameters related to the Scale engine and the Arpeggiator.

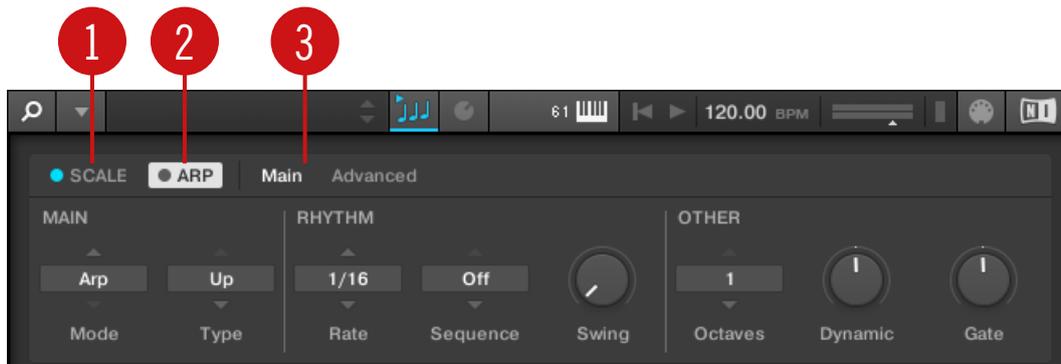

The Perform panel.

(1) **SCALE:** Clicking the round button left of **SCALE** switches the Scale engine on or off. Clicking the **SCALE** label displays the Scale engine's parameters. See [↑14, Playing and Editing Scales and Chords](#) for details.

(2) **ARP**: Clicking the round button left of **ARP** switches the Arpeggiator on or off. Clicking the **ARP** label displays the Arpeggiator's parameters. See [↑15, Playing and Editing the Arpeggiator](#) for details.

(3) **Parameter pages**: If multiple pages of parameters are available, you can switch between them here.

For more information, refer to [↑14, Playing and Editing Scales and Chords](#).

5.4 Plug-in Panel

The Plug-in Panel lets you view and customize the parameters mapped to the Control section on the KOMLETE KONTROL keyboard for individual Preset files. The amount of pages and parameters vary depending on the loaded Instrument or Effect.



The Plug-in Panel.

For more information, refer to [↑13.4, Customizing Parameter Mappings using the Plug-in Panel](#).

5.5 Plug-in Chain Panel

At the top of the Plug-in area there is situated the Plug-in chain panel with the Plug-in chain. The Plug-in chain is the place where you can directly load Instrument Plug-ins (Plug-in slot 1) and Effect Plug-ins (Plug-in slot 2 onwards) and arrange them in horizontal series. Each Plug-in is loaded into a Plug-in slot which create the Plug-in chain. The arrangement of the Plug-ins is customizable, but the first Plug-in slot always has to have an Instrument loaded.



Overview Plug-in Chain Panel

- (1) **Plug-in chain:** Shows the loaded Instrument and added Effects in horizontal arrangement.
- (2) **Plug-in slot:** Each Plug-in slot represents a Plug-in and displays the products name and image. Use the Plug-in slots to directly load plug-ins, bypass effects and customize the order.

5.6 MIDI Assignment Editor

The MIDI Assignment editor allows you to define what kind of MIDI messages are assigned to the controls on the KOMPLETE KONTROL keyboard in MIDI mode. This way you can use the keyboard with MIDI applications or MIDI devices that require specific MIDI messages to be sent in order to control certain parameters or functions. Multiple templates can be configured for quick recall, allowing you to prepare controller assignments for different applications and/or devices. The MIDI Assignment editor lets you change the assignments for the knobs, buttons, the Touch Strip in the keyboard's Control section, as well as for connected pedals.



Overview of the MIDI Assignment editor.

- (1) **Templates pane:** Allows you to create and manage your Templates for MIDI assignments.
 - (2) **Templates pane button:** Shows/hides the Templates pane.
 - (3) **KNOBS, BUTTONS, PEDALS, TOUCHSTRIP:** Here you can select the type of control element to which you can make MIDI assignments.
 - (4) **Pages / Pedal A and Pedal B:** For the Knobs and Buttons you can have multiple assignments, organized in pages. Here you can select and manage up to four pages. Pedal Assignments are global and not distinct per Template. Pedals A and B can be independently configured.
- For the pedals it is not possible to have multiple assignments.
- (5) **Control elements:** Here you can select the control element for a MIDI assignment.
 - (6) **Definition area:** Defines the MIDI assignment properties for the selected control element.

For more information, refer to [↑8.4, Using the MIDI Assignment Editor](#).

5.7 Plug-in Area

The Plug-in area of the KOMplete KONTROL software is where your Instruments are displayed once you have loaded them from the Browser. Each Instrument offers a different set of controls and parameters that are all easily controlled directly on the computer screen or from the keyboard. Parameter changes are mutually reflected by both the displays on the keyboard and the Instrument's user interface in the Plug-in area.



For most Instruments, additional views are available that give you access to another set of controls. See [↑7.1, Instrument Views](#) for details.



The Plug-in area displaying the Instrument Form.


6 Keyboard Overview

The COMPLETE KONTROL keyboard is tightly integrated into the software and can be used to browse, control and play your Products as well as to control supported hosts.

The keyboard is available in two sizes: The S49, and S61 are equipped with the same top-quality semi-weighted Fatar keybed with aftertouch. Beyond the keybed, all keyboards come with identical features.

The keyboard is equipped with the following sections:

Top View

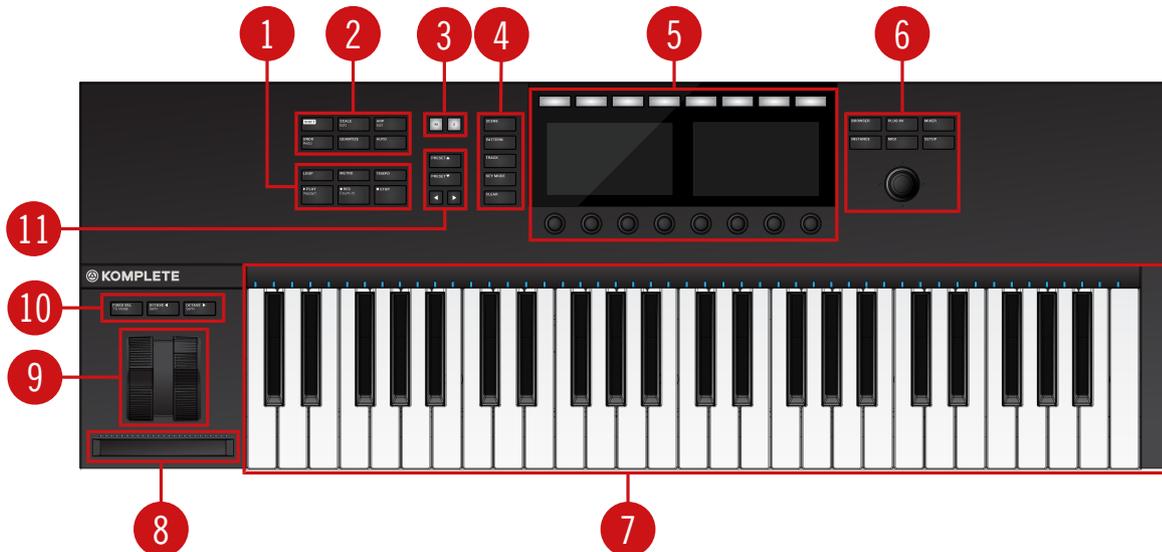

COMPLETE KONTROL S49

(1) Transport section: Controls the transport of supported hosts when COMPLETE KONTROL is used as a plug-in.

-
- (2) **Perform and Edit section:** Lets you edit and control the Smart Play features, i.e. playing scales, chords, and arpeggiator sequences. The settings made in the Perform and Edit section are displayed in the Control section (5) and are reflected by the Light Guide and keybed (7).
- (3) **Solo and Mute buttons:** Let you instantly solo and mute any Sound or Group in supported hosts.
- (4) **Arrange buttons:** Let you switch between the different arrangement views and modes in supported hosts.
- (5) **Control section:** The knobs and displays are automatically assigned to parameters of the loaded Product or selected mode.
- (6) **Navigation and Mode buttons:** Lets you browse your KOMLETE KONTROL Library and navigate in your DAW with the 4-D encoder, as well as directly access functions like the Mixer and MIDI mode.
- (7) **Keybed and Light Guide:** Reflect the Smart Play functions by switching LEDs on or off to indicate active and inactive keys. The Light Guide also reflects the settings of the loaded Instrument and can be very helpful to illustrate e.g. BATTERY or KONTAKT mappings.
- (8) **Touch Strip:** The Touch Strip can be assigned to parameters via the MIDI learn function of the loaded Instrument.
- (9) **Pitch & Modulation Wheels:** The Pitch Wheel and the Modulation Wheel are automatically assigned to corresponding controls of the loaded Instrument.
- (10) **Transpose and Fixed Velocity buttons:** The **FIXED VEL (TS Mode)** button sets the note velocity for all keys to a fixed value of 127. The **OCTAVE (Semi) down / up** buttons transpose the entire keybed one octave down / up. Pressing **SHIFT + OCTAVE (Semi) down / up** transposes the entire keybed a semitone down / up.
- (11) **Preset and Page buttons:** The **PRESET up / down** buttons let you skip to the next or previous Preset file of the loaded Product. The **Page left / right** buttons let you skip to the next page and thus remap the Knobs and displays to another set of parameters.

Rear View




Keyboard Interface rear view.

- (1) **Kensington Lock:** Attaches a Kensington lock for protecting the keyboard against theft.
- (2) **MIDI IN/OUT socket:** Connect devices for MIDI control.
- (3) **Pedal A and Pedal B sockets:** Connects sustain and expression pedals.
- (4) **PSU socket (15V - 1.2A) :** Connects the optional power supply which can be purchased separately in the Native Instruments online shop.
- (5) **USB connector:** Connects the keyboard to your computer with the supplied USB cable.
- (6) **Power button:** Switches the keyboard on and off.

6.1 Perform and Edit Section

The buttons in the Perform and Edit section on the far left of the KOMPLETTE KONTROL keyboard let you switch the Scale engine and the Arpeggiator on or off and access their parameter for editing. The parameters are visible in the displays and editable with the knobs in the Control section.

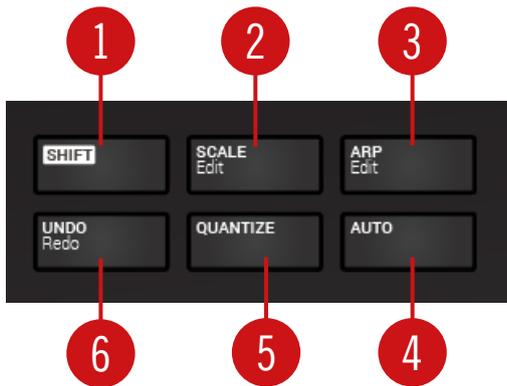


The Perform and Edit section.

- (1) **SHIFT**: Lets you access the secondary functions of buttons labeled as such, for example the **Edit** functions of the **SCALE (Edit)** and **ARP (Edit)** buttons.
- (2) **SCALE (Edit)**: Switches the Scale engine on or off, and lets you edit the Scale engine parameters.
- (3) **ARP (Edit)**: Switches the Arpeggiator on or off, and lets you edit the Arp parameters.
- (4) **AUTO**: Lets you activate or deactivate automation in supported hosts.
- (5) **QUANTIZE**: Lets you quantize events to the step grid in supported hosts.
- (6) **UNDO (Redo)**: Lets you undo or redo your last action in supported hosts.

6.2 Transport Section

The **TRANSPORT** section at the far left on the keyboard gives you quick and easy access to functions like play, record, loop, etc. in supported hosts.

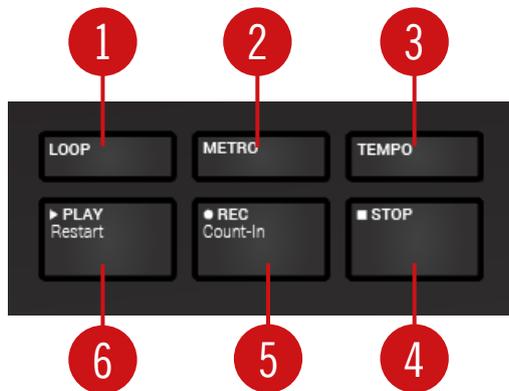


The Transport section.

- (1) **LOOP**: Switches between standard and loop playback.
- (2) **METRO**: Switches the metronome on or off.
- (3) **TEMPO**: Lets you tap in the tempo.
- (4) **STOP**: Stops playback.
- (5) **REC (Count-in)**: **REC (Count-in)** switches record on or off. **SHIFT + REC (Count-in)** switches the count-in on or off.
- (6) **PLAY (Restart)**: **PLAY (Restart)** starts playback. **SHIFT + PLAY (Restart)** starts playback from the beginning.

6.3 Control Section

The Control section is located at the center of the KOMPLETE KONTROL keyboard. The knobs, buttons, and displays are automatically assigned to parameters of the loaded Product or selected mode. They provide immediate control and allow for deep editing of various aspects of KOMPLETE KONTROL.

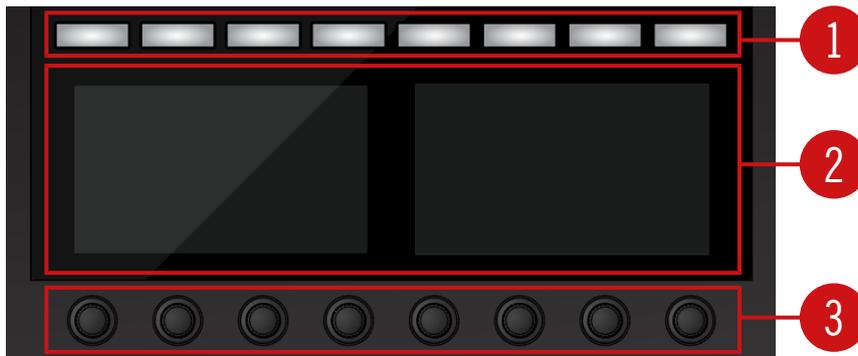

The controls of the Control section.

(1) **Buttons 1-8** : The eight buttons dynamically adapt their assignment to the selected mode, allowing for direct access to the most important functions and sub-sections. The displays show the current assignment below each button.

(2) **Displays**: The displays give you information related to the shown Product or selected mode, and show the functions and parameters assigned to the buttons and knobs.

(3) **Knobs 1-8**: The eight knobs dynamically adapt their assignment to the selected mode, allowing for direct access to the available parameters. The displays show the current assignment above each Knob. As the knobs are touch-sensitive, you can tap them to see additional information.

6.4 Mode Buttons



Mode Buttons.

- (1) **BROWSER** : Displays the Browser in the Control section.
- (2) **PLUG-IN** : Displays the Plug-in Chain and the selected plug-in the Control section.
- (3) **MIXER** : Displays the mixer of supported hosts in the Control section.
- (4) **SETUP** : Displays the hardware serial number and the firmware version, and lets you change the display brightness.
- (5) **MIDI** : Accesses MIDI mode that allows you to use the KOMPLETE KONTROL keyboard as a MIDI controller.
- (6) **INSTANCE** : When using KOMPLETE KONTROL as a plug-in in a host without advanced integration, this button lets you switch between KOMPLETE KONTROL instances and MIDI Mode.

6.5 Navigation and the 4-D Encoder

The 4-Directional Push Encoder (referred to as the 4-D encoder) combines the functionalities of a conventional joystick, of a button, and of a continuous encoder. These aspects make it a multi-functional control element that can be used for navigation, for adjusting values of parameters, and for controlling Products. Hence, it can be moved to the four directions: up, down, left, and right, as well as being pushed and rotated.



The 4D Encoder situated below the Mode buttons.

Depending on the menu or context, the available actions differ:

- The displays are navigated by pushing the 4-D encoder in a direction indicated by the four LEDs.
- Entries in a list are browsed by turning the 4-D encoder.
- The value of a highlighted parameter is adjusted by turning the 4-D encoder.
- A selection is confirmed by pushing the 4-D encoder.

6.6 Keybed and Light Guide

The Light Guide above the keybed visualizes the key mapping of loaded Instruments and samples by color coding. Active and inactive keys respectively sample based Instruments are indicated by the LEDs. The Light Guide also reflects the Smart Play settings. This means when you select e.g. a scale or chord, the LEDs corresponding to the keys contained in that scale or chord will light up, whereas inactive keys remain unlit. The Light Guide also gives you visual feedback when you play back incoming MIDI note patterns from the host.



The Light Guide

6.7 Modulation Wheels

The two Modulation Wheels to the left of the keyboard let you control pitch and modulation parameters of the loaded Instrument.



Modulation Wheels

The left Modulation Wheel, called Pitch Wheel, lets you adjust the pitch of the loaded Instrument. The right Modulation Wheel, called Modulation Wheel, lets you adjust the default modulation parameter of the loaded Instrument.


6.8 Touch Strip

The Touch Strip is an intuitive control element that gives you immediate control over Instrument parameters. It can send MIDI pitchbend or control change messages and can be configured in the MIDI Assignment editor. For more information, refer to [↑8.4, Using the MIDI Assignment Editor](#).



The Touch Strip.

6.9 Transpose and Fixed Velocity Buttons

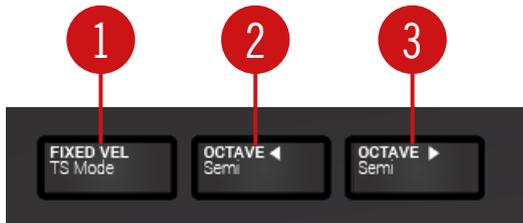

Transpose and Fixed Velocity Buttons.

(1) **FIXED VEL (TS Mode)** : Sets the note velocity for all keys to a fixed value of 127.

(2 - 3) **OCTAVE (Semi) down** and **OCTAVE (Semi) up** : Transpose the entire keyed one octave down / up. Pressing **SHIFT + OCTAVE (Semi) down / up** transposes the entire keyed a semi-tone down / up. Pressing both buttons simultaneously resets the keyed to the central octave.

7 Global Controls and Preferences

This sections introduces the global controls and the Preferences you can access via the Header of KOMLETE KONTROL.

7.1 Instrument Views

Once you have loaded an Instrument from the Browser, it appears in the Plug-in area of the KOMLETE KONTROL software. Most KOMLETE Instruments come equipped with more than one view, giving you access to another set of controls or letting you edit certain features in finer detail. The three possible Instrument views are **Default View**, **Additional View**, and **Edit View** which can be selected directly in the KOMLETE KONTROL menu.



Instrument views in the KOMLETE KONTROL menu.

- ▶ Alternatively, you can switch between Default View and Additional View by clicking on the View button in the Header (+ icon).

All Instrument parameters can be controlled at all time from the KOMLETE KONTROL keyboard, regardless of the selected Instrument view in the KOMLETE KONTROL software.



The available views may vary with the loaded Instrument.

7.1.1 Default View

The Default View is the view that first appears when you load an Instrument from the Browser. It gives you access to some of the most important features of each NKS Instrument with an easy-to-use interface.



POLYPLEX in Default View.

7.1.2 Additional View

Most NKS Instruments have more parameters that can be displayed at once in small surface and therefore come with a second, Additional View. The Additional View can give you access to detailed edit controls or to a completely different set of controls altogether depending on the loaded Instrument.



POLYPLEX in Additional View.

Besides of selecting Additional View via the KOMPLETE KONTROL Menu and the application menu, you can also do this by clicking the + button in the KOMPLETE KONTROL header. Clicking it again will return to the Default View.



The + button opens and closes the Additional View.

7.1.3 Edit View



Edit view is only available for Instruments powered by KONTAKT or REAKTOR.

In the Edit View you have also the possibility to open any KOMPLETE Instrument that can be loaded or played by either the KONTAKT PLAYER or REAKTOR PLAYER. This gives you access to all the flexible controls and features you would normally have when using KONTAKT or REAKTOR in stand-alone mode.



POLYPLEX in Edit View.




Edit view enables you to access files that cannot be loaded from the KOMPLETE KONTROL Browser, e.g. KONTAKT Multis which can be loaded from the KONTAKT Browser in edit view.

7.2 Switching Instances

When two or more instances of the KOMPLETE KONTROL software are running (e.g. as a plug-in on different tracks of the host), you can choose which instance you want to control from the KOMPLETE KONTROL keyboard.

Switching to an Instance from the Software

- ▶ To switch the keyboard to a particular instance of the KOMPLETE KONTROL software, click the Connect button (keyboard icon) in the header of that instance.



Automatic Switching in a Host

When using KOMPLETE KONTROL as a plug-in in a host with advanced integration, the keyboard automatically switches between controlling the KOMPLETE KONTROL software and MIDI mode, depending on the content of the selected track.

- If you select a track that hosts the KOMPLETE KONTROL plug-in, the keyboard automatically switches to this instance of the KOMPLETE KONTROL software. This allows you to immediately control all of your Product's parameters from the keyboard.
 - If you select a track that does not host the KOMPLETE KONTROL plug-in, the keyboard automatically switches to MIDI mode. This allows you to assign the available controls on the keyboard to parameters in the host or in an inserted plug-in via MIDI learn (if supported).
- ▶ To select a track in a supported host from the keyboard, move the 4-D encoder up or down until the track is highlighted.

Switching to an Instance from the Keyboard

If you use KOMLETE KONTROL as a plug-in in a host without advanced integration, you cannot rely on automatic switching between instances. However, you can still select a particular instance of the KOMLETE KONTROL software from the keyboard using its displays and 4-D encoder.

To display and switch between KOMLETE KONTROL instances from the keyboard, follow the instructions below:

1. Press the **INSTANCE** button to show all active instances of the KOMLETE KONTROL software on the keyboard displays.
 2. Use the 4-D encoder to select an instance.
 3. Press the 4-D encoder to switch to the selected instance.
- You can now control the selected instance of the KOMLETE KONTROL software from the keyboard.

7.3 Transport and Tempo

If KOMPLETE KONTROL is used as a stand-alone application, it features its own Transport and Tempo controls. They are used by sequenced KONTAKT and REAKTOR Instruments as well as the Arpeggiator. Additionally, the tempo is used by all Instruments that allow you to set timing parameters in relation to the musical tempo (e.g. rhythmic modulation, delay effects).

You can find the Transport and Tempo controls in the Header:



Transport and tempo controls in KOMPLETE KONTROL.

(1) **Play** button: Starts and stops the internal clock. This can be used to control the playback of sequenced KONTAKT and REAKTOR Instruments.

(2) **Reset** button: Resets the internal clock to its start position. Consequently, sequencers in KONTAKT and REAKTOR Instruments will start their playback from the beginning. The same applies to the Arpeggiator.

(3) **Tempo control**: Sets the tempo in BPM (beats per minute).



When using KOMPLETE KONTROL as a plug-in, it is automatically synchronized to the host. Therefore the Transport and Tempo controls are grayed out and inactive.

7.3.1 Resetting the Clock

Resetting the Clock in the Software

- When the internal clock is stopped, clicking the Reset button allows you to reset the internal clock. Clicking the Play button will start playback from the beginning.
- When the internal clock is running, clicking the Reset button allows you to reset the internal clock and resume playback from the beginning.

Resetting the Clock from the Keyboard

- When the internal clock is stopped, pressing **STOP** allows you to reset the internal clock. Pressing **PLAY (Restart)** will start playback from the beginning.
- When the internal clock is stopped, pressing **SHIFT + PLAY (Restart)** allows you to reset the internal clock and start playback from the beginning.
- When the internal clock is running, pressing **SHIFT + PLAY (Restart)** allows you to reset the internal clock and resume playback from the beginning.

7.3.2 Adjusting Tempo

Adjusting Tempo in the Software

The Tempo control allows you to set the tempo in BPM (beats per minute):

1. Click the display and drag the up / down.
2. Alternatively, you can double-click the display and enter a value numerically.

→ The tempo adjusts in increments of one.

Adjusting Tempo from the Keyboard

You can also use the KOMPLETE KONTROL keyboard to set the tempo in BPM (beats per minute):

1. Press and hold **TEMPO**.

2. While holding **TEMPO** turn Knob 1 in the Control section.

→ The tempo is adjusted in increments of 1 BPM.

7.4 Adjusting Master Volume

The Master Volume slider lets you adjust the overall output volume of KOMPLETE KONTROL. The Volume meter shows the current peak level of the output signal.



Master Volume controls.

In order to adjust the output volume:

▶ Click and drag the slider to the left or to the right.

→ This will adjust the output volume in 0.5dB increments from -30dB to +10dB. Below -30dB, the keyboard's volume control is exponentially scaled and quickly lowers the output signal to complete silence.

Adjusting Master Volume with the Keyboard

In order to adjust the output volume on the keyboard:

1. Press and hold **SHIFT**.
2. While holding **SHIFT** turn the Knob 1.

7.5 Preferences

In the [Preferences](#) you can specify various settings for KOMPLETE KONTROL.

To open the [Preferences](#):

- ▶ Click *Edit > Preferences* in the KOMPLETE KONTROL menu:




7.5.1 Preferences – Audio Page

The [Audio](#) page holds settings related to your audio interface when KOMPLETE KONTROL is running as a stand-alone application.



When using KOMPLETE KONTROL as a plug-in, the audio configuration is managed by the host, and the [Audio](#) page is not available.

The [Routings](#) section allows you to configure the connections between the virtual outputs of KOMPLETE KONTROL and the physical outputs of your audio interface.

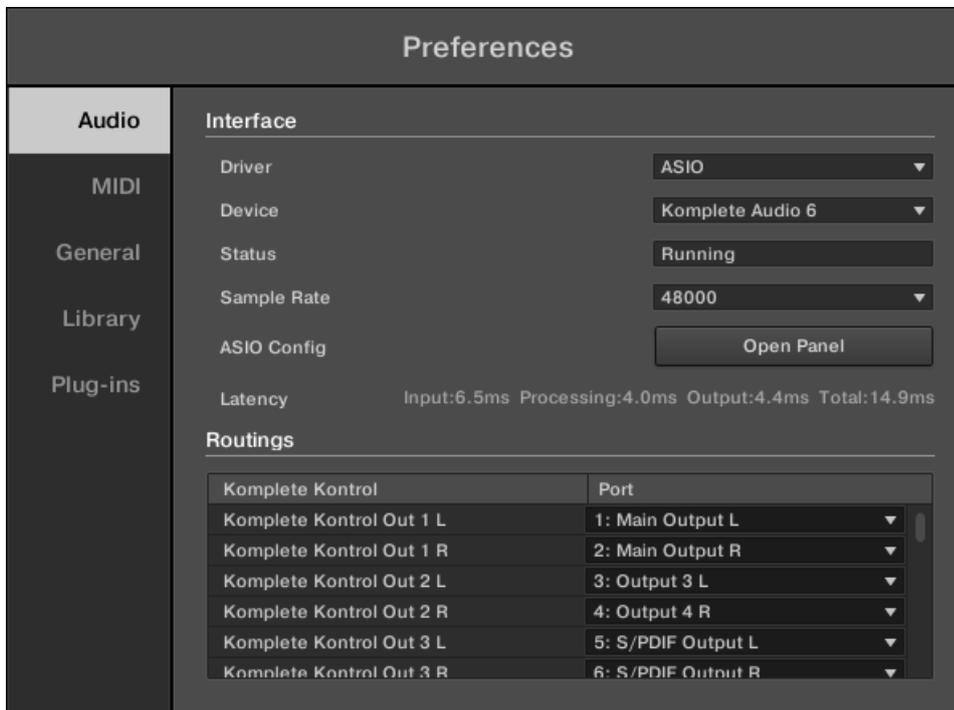

Preferences panel — Audio page

Setting	Description
Driver	Here you can select the audio driver.
Device	This allows you to choose from the available devices if you have connected more than one audio interface.
Status	This shows you whether your audio interface is currently running.
Sample Rate	This displays the selected sample rate of your audio interface. Please restart COMPLETE KONTROL after changing the sample rate.


Setting	Description
Buffer Size	<p>macOS: This slider allows you to adjust the buffer size of your audio interface in samples. Lower values result in a more immediate playing response but increase the CPU load, and may result in audible clicks and pops. Larger values decrease the CPU load but introduce a larger latency (a small delay between hitting a pad and hearing it). It is recommended to find the lowest value that does not cause clicks and pops even when playing more demanding Products.</p> <p>Windows: When using an ASIO driver, the Audio page shows an ASIO Config button instead of the Buffer Size slider. Click this button to open the settings window of the selected ASIO driver.</p>
Latency	This shows the delays introduced by the current Buffer Size setting.
Routings	Under Routings , you will be presented with a list of the 16 stereo outputs from KOMPLETE KONTROL: In the right column, you can assign them to the outputs of your audio interface. Click the fields in the right column to select the desired outputs via a drop-down menu.

7.5.2 Preferences – MIDI Page

The **MIDI** page allows you to set up the MIDI input and output ports that you want to use when KOMPLETE KONTROL is running as a stand-alone application.



When using KOMPLETE KONTROL as a plug-in, the MIDI configuration is managed by the host, and the **MIDI** page is not available.

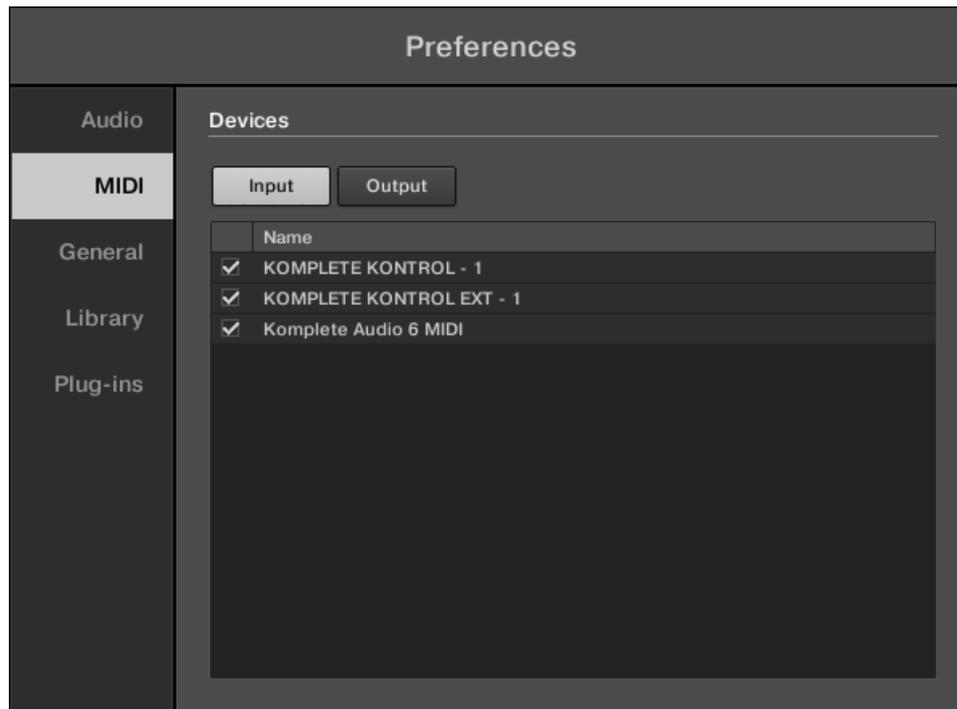

Preferences panel — MIDI page (entries may vary on your computer)

Element	Description
Input	Clicking Input displays a list of all the available MIDI inputs of your system. You can activate/deactivate each input by clicking the checkbox next to its name.
Output	Clicking Output displays a list of all the available MIDI outputs of your system. You can activate/deactivate each input by clicking the checkbox next to its name.

The MIDI Output settings are required for using KOMLETE KONTROL's Smart Play features with other MIDI instruments.


7.5.3 Preferences – General Page

The **General** page holds Usage Data Tracking settings. Usage Data Tracking technology enables KOMLETE KONTROL to automatically track anonymous usage data that you can choose to share with us.

Usage Data Tracking can be enabled or disabled in the **General** page of the **Preferences** in the KOMLETE KONTROL software. However, we encourage all users to keep Data Tracking enabled as it provides a valuable tool for understanding the performance of Native Instruments applications when they are used in real life situations. The data sent to Native Instruments is one hundred percent anonymous and will not affect performance.

For more detailed information about Usage Data Tracking, please refer to the following Knowledge Base article on the Native Instruments website:

<https://support.native-instruments.com/hc/en-us/articles/209545029>

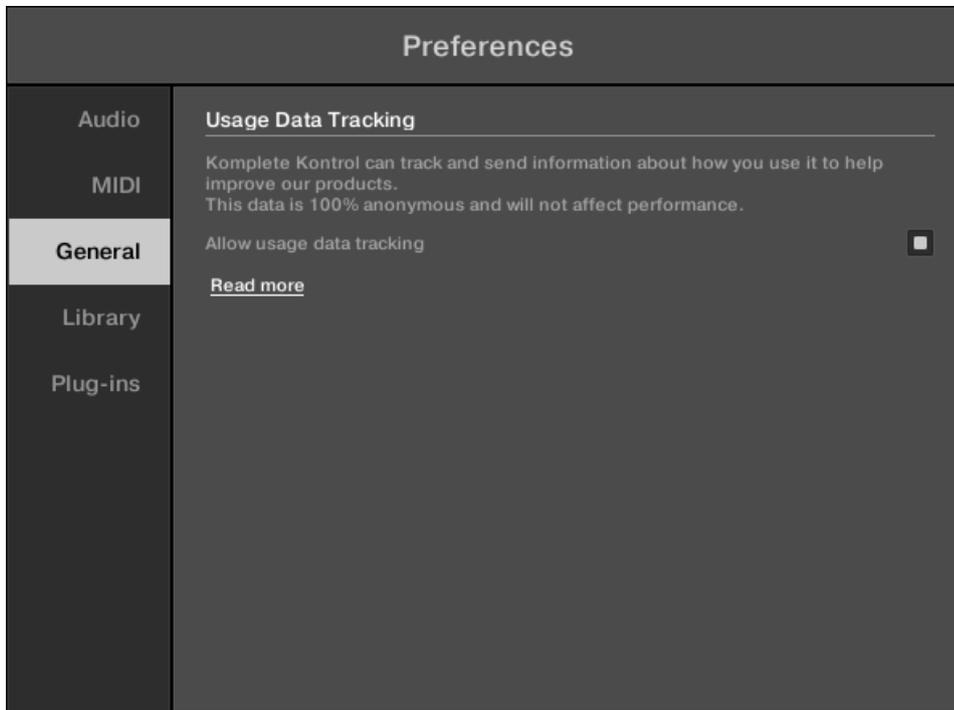

Usage Data Tracking in the KOMPLETE KONTROL Preferences.

To enable or disable Usage Tracking:

1. Open the [General](#) page of the [Preferences](#) by clicking *Preferences...* in the KOMPLETE KONTROL menu.
2. Click the [Allow usage data tracking](#) checkbox to enable or disable user data tracking.


7.5.4 Preferences – Library Page

The [Library](#) page allows you to edit the locations of all KOMPLETE KONTROL Library files (both Factory and User) that appear in the [Library](#) pane of the Browser.

At the top of the page, the [Factory](#) and [User](#) buttons allow you to switch between the [Factory](#) pane and the [User](#) pane.

Factory Pane

The [Factory](#) pane shows all factory libraries available. These libraries will appear in the Factory view of the Browser's [Library](#) pane.

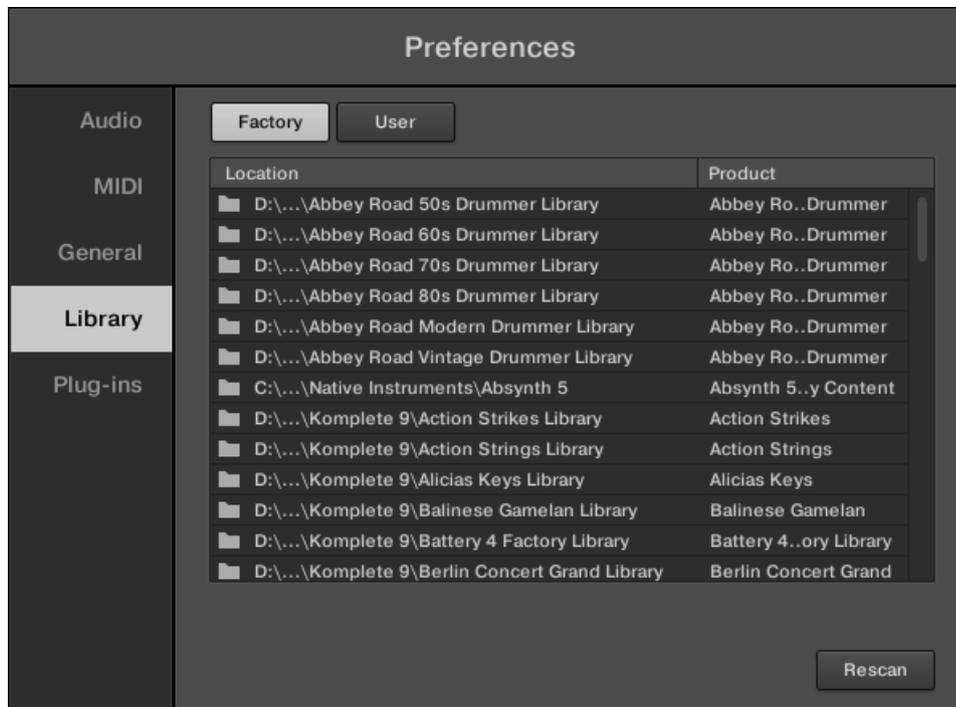


Preferences panel – the Library page's Factory pane.

Element	Description
Location column	Shows the path of each library. If you have moved any library to another location on your computer, click the folder icon on the left of that library and select its new path.
Product column	Shows the name of each product. These names cannot be edited.
Rescan button	If you have made any change to a library (e.g., changed its location), select it in the list and click the Rescan button to rescan that library.

User Pane

The [User](#) pane shows all user libraries currently used. These include KOMPLETE KONTROL's standard user directory as well as any other user directory you might have defined. These libraries will appear in the User view of the Browser's [Library](#) pane.

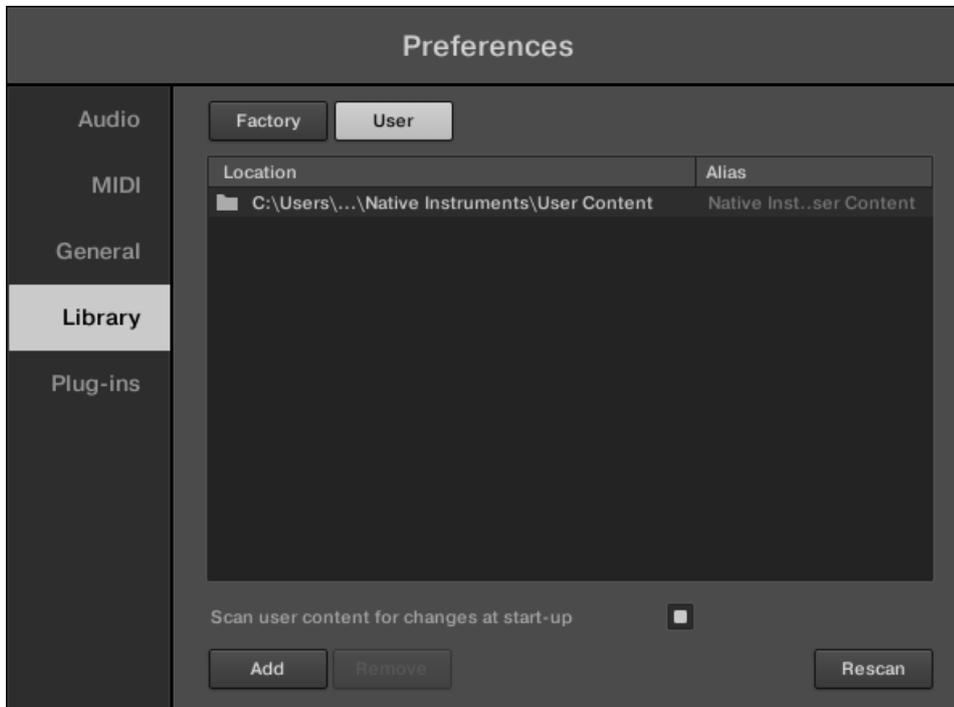

Preferences panel – the Library page's User pane.

Element	Description
Location column	Shows the path of each library. If you have moved any library to another location on your computer, click the folder icon on the left of that library and select its new path.
Alias column	Shows the alias stored for each library. Click an alias to edit it. Defining aliases for your user folders is not mandatory, but it can be of great help when working on different computers (see description below). After adding a location (see Add below), click the field in the new row and in the Alias column to set the alias for that new location. The alias of the default user folder, Native Instruments User Directory , cannot be edited — this is the location where all your user files will be stored by default.
Scan user content for changes at start-up	Enabled by default, this option automatically detects any new added user content when starting KOMPLETE KONTROL.
Add button	Click Add to manually add directories to the user library. See below for more details.
Remove button	Click Remove to remove the selected user library. Files will only be removed from the KOMPLETE KONTROL Browser, not from your hard disk.
Rescan button	If you have made any change to a library (e.g., added/removed files), select it in the list and click the Rescan button to rescan that library.



You can resize the [Preferences](#) panel at your convenience using the usual method on your operating system. You can also resize each column by clicking and dragging the limit between both column headers.

Adding Folders to the User Library

In the [User](#) pane of the [Library](#) page, you can add other folders to the user content of your KOMLETE KONTROL Library. To do this:

1. Click [Add](#) at the bottom of the pane.
A folder selection dialog opens up.
 2. In the dialog, navigate to the desired folder on your computer and click [OK](#) ([Choose](#) on macOS).
- All KOMLETE KONTROL-compatible files found in the selected folder are added to your user content in KOMLETE KONTROL.



KOMLETE KONTROL-compatible files include *ens*, *rkplr*, *nrkt*, *nksn*, *nfm8*, *nabs*, *nki*, *nmsv*, *nbkt*, *nis*.

Furthermore, the attributes (Instrument/Bank/Sub-Bank, Type/Sub-Type/Mode tags, as well as properties) of all imported files will be retained.

By adding a folder to the user content of your KOMLETE KONTROL Library, you make their files available in the Browser's [Library](#) pane for quick searching and loading.



Paths to folders added via the [IMPORT](#) button in the Browser's [Files](#) pane will also show up here. The only difference between adding folders via the [Add](#) button in [Preferences](#) panel described here, and via the [IMPORT](#) button in the [Files](#) pane of the Browser is that the latter allows you to directly tag the files as they are imported.

Please note that the selected folder cannot contain, or be contained within, a folder already listed in the [User](#) or [Factory](#) pane. If KOMLETE KONTROL detects such a folder as you press [OK](#) ([Choose](#) on macOS) in the folder selection dialog, a [Duplicate Location](#) message appears: Click [OK](#) to return to the folder selection dialog and select another folder on your computer.

Removing Folders from the User Library

You can also remove any user folder from your library—except the default user content directory [Native Instruments User Content](#).

7.5.5 Preferences – Plug-ins Page

The [Plug-ins](#) page allows you to manage your VST plug-ins in KOMPLETE KONTROL.

At the top of the page, the [Manager](#) and [Locations](#) buttons allow you to switch between the [Manager](#) pane and the [Locations](#) pane.

Manager Pane


The [Manager](#) Pane allows you to view and manage all VST plug-ins available in KOMPLETE KONTROL. By default, all available plug-ins are activated for use in KOMPLETE KONTROL.

- ▶ To deactivate a plug-in for use in KOMPLETE KONTROL, click on the checkbox icon next to its name so it is unchecked.

The option to [Always use latest version of NI Plug-ins](#) selects whether or not your Library content is always loaded with the latest version of the associated plug-in. If this option is disabled, your Library content is loaded with the lowest required version of the associated plug-in found on the computer.



For example, this option is required if you have installed both the full version of REAKTOR 5 as well as a KOMPLETE Instrument that came with REAKTOR 6 Player. By disabling the option, the REAKTOR 5 Factory Library will be loaded with the full version of REAKTOR 5, while the KOMPLETE Instrument will be loaded with REAKTOR 6 Player. This is necessary since the REAKTOR 5 Factory Library is not authorized for use with REAKTOR 6 Player.

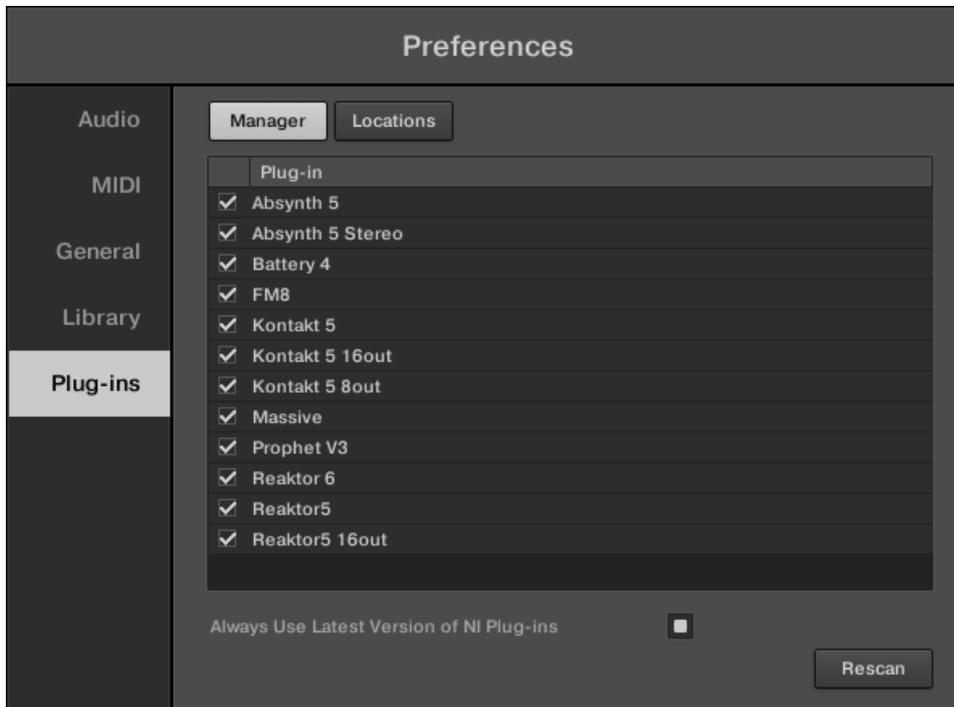


Preferences panel — the Plug-ins page's Manager pane.

Element	Description
Checkbox column	Activates or deactivates a plug-in for use in COMPLETE KONTROL.
Plug-in column	Lists all available VST plug-ins in COMPLETE KONTROL.
Always use latest version of NI Plug-ins	<p>If this option is enabled (default), Library content is loaded with the latest version of the associated plug-in.</p> <p>If this option is disabled, Library content is loaded with the lowest required version of the associated plug-in.</p>

Locations Pane

The [Locations](#) pane allows you manage the folders containing your plug-ins on the hard drive. KOMPLETE KONTROL scans these folders for VST plug-ins and adds them to the [Manager](#) pane. You can [Add](#) and [Remove](#) folders from the list, as well as use the [Rescan](#) function to update the available plug-ins in KOMPLETE KONTROL according to any changes made to the folders or their contents.

- ▶ To display the [Locations](#) pane, click the [Locations](#) button at the top of the [Plug-ins](#) page.

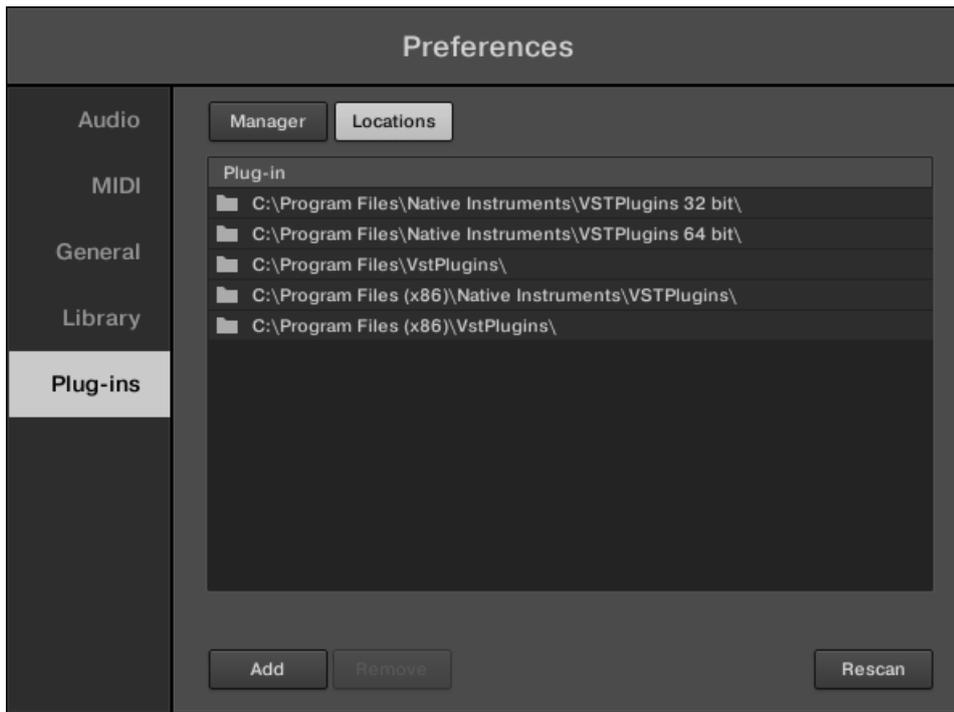

Preferences panel — the Plug-ins page's Locations pane.

Setting	Description
Plug-in column	Lists all folders that KOMPLETE KONTROL scans for VST plug-ins.
Add	Opens a file dialogue that lets you add another folder to the list.
Remove	Removes the currently selected folder from the list.
Rescan	Scans all folders in the list for compatible plug-ins and updates the Manager pane accordingly.

7.6 Keyboard Settings

The KOMPLETE KONTROL keyboard's **SETUP** page gives you access to information and settings related to the hardware.

- ▶ To open the **SETUP** page, press the **SETUP** button on the keyboard.



The following information and settings are available:

- **Firmware:** The version number of the firmware installed on the keyboard.
- **Serial Nr.:** The hardware serial number of the keyboard.

- **Velocity / SCALING:** Lets you adjust the velocity response curve of the keyboard. Use the *Soft 3*, *Soft 2*, *Soft 1* settings to compensate for gentle playing (velocity response is more sensitive), and the *Hard 1*, *Hard 2*, *Hard 3* settings to compensate for strong playing (velocity response is insensitive).
- **Displays / BRIGHTNESS:** Lets you adjust the brightness of the keyboard's displays.

7.7 Loading a Plug-in in Default State

You can load a Plug-in in default state directly from the KOMPLETE KONTROL menu:

- ▶ In the KOMPLETE KONTROL menu select i.e. *Plug-ins > Native Instruments > Massive*.



→ The Plug-in is loaded without having any parameters set.



Loading Plug-ins in default state is only possible in the software.

8 MIDI Communication

KOMLETE KONTROL provides you with flexible MIDI control and host automation capabilities for easy integration with your MIDI environment.

Incoming MIDI

KOMLETE KONTROL and the Instruments you load inside it can be controlled via MIDI and the host (when KOMLETE KONTROL is loaded as a plug-in):

- **Triggering Instruments via MIDI notes:** By default, incoming MIDI notes trigger the loaded Instrument and will also be visually reflected by the Light Guide.
- **Controlling parameters via host automation:** You can control parameters of both KOMLETE KONTROL and your loaded Instruments via host automation (when KOMLETE KONTROL is loaded as a plug-in).

Receiving MIDI Clock

KOMLETE KONTROL does not receive MIDI Clock. However, when using KOMLETE KONTROL as a plug-in, it is automatically synchronized to the host tempo. The tempo display in KOMLETE KONTROL's header is grayed out and tempo is adjusted in the host.

Outgoing MIDI

You can also **send MIDI data from KOMLETE KONTROL:**

- **Triggering MIDI instruments and Recording MIDI notes:** KOMLETE KONTROL sends MIDI Note, Pitch Bend, and Channel Pressure (aftertouch) messages to the host and to any MIDI application or device.
- **Controlling MIDI applications and devices:** KOMLETE KONTROL's MIDI mode allows you to send Control Change and Program Change messages to any MIDI application or device.
- **Routing and recording processed MIDI notes:** KOMLETE KONTROL outputs the MIDI notes generated by the Scale engine and the Arpeggiator through the MIDI outputs of the stand-alone application as well as the plug-in. You can route the MIDI notes to other MIDI instruments or record them as a MIDI pattern in the host.



MIDI output is only supported by the stand-alone application as well as the VST and AAX versions of the plug-in. The AU (Audio Unit) version of the plug-in does not support MIDI output.

8.1 Host Automation

When you load KOMPLETE KONTROL as a plug-in in a host, the parameters of the loaded Instrument, the Scale engine, and the Arpeggiator become available for automation from the host.

Available Parameters for Host Automation

All parameters available for automation are found in the Perform panel and the Plug-in panel. Browser controls cannot be automated.

8.1.1 Automation IDs for the Perform Panel

The following automation IDs are reserved for parameters in KOMPLETE KONTROL's Perform panel:

Automation ID	Parameter
000	Reserved for Instance Recognition and Automatic Focus Follow
001	Scale On / Off
002	Root Note (Scale)
003	Scale Type (Scale)
004	Key Mode (Scale)
006	Chord Mode (Scale)
007	Chord Type (Scale)
026	Arp On / Off
027	Mode (Arp)

Automation ID	Parameter
028	Type (Arp)
029	Rate (Arp)
030	Sequence (Arp)
031	Swing (Arp)
032	Octaves (Arp)
033	Dynamic (Arp)
034	Gate (Arp)
035	Retrigger (Arp)
036	Repeat (Arp)
037	Offset (Arp)
038	Inversion (Arp)
039	Min. Key (Arp)
040	Max. Key (Arp)
041	Hold (Arp)

8.1.2 Recording Automation

Many hosts require that you have enabled transport record in order to record automation, while others make use of dedicated automation controls. Once the host is ready to record automation, you can start playback and adjust parameters on the KOMPLETE KONTROL keyboard in order to record them.




For detailed information regarding automation recording in the host, refer to its documentation.

Changing the State of an On/Off Switch

To change the state of an on/off switch:

1. Click the corresponding button with your computer mouse.

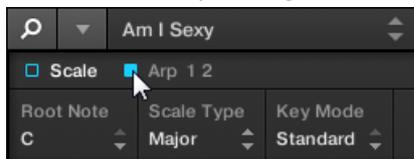

2. Turn the knob on the keyboard currently assigned to the corresponding parameter.

Selecting Another Entry from a Drop-Down Menu

To select another entry from a drop-down menu:

1. Click the corresponding menu with your computer mouse and select an entry.




2. Turn the knob on the keyboard currently assigned to the corresponding parameter.

Changing the Value of a Drag Control

To change the value of a drag control:

1. Click and drag the corresponding drag control with your computer mouse.

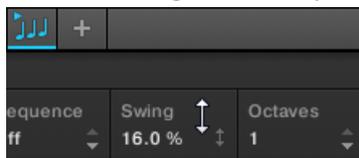

2. Turn the knob on the keyboard currently assigned to the corresponding parameter.

Some hosts let you handle automation by using automation IDs that are mapped to specific parameters of the plug-in. KOMPLETE KONTROL comes with a predefined list of automation IDs that lets the host find them automatically.

8.2 Using the Keyboard in MIDI Mode

Besides using the KOMPLETE KONTROL keyboard in combination with the KOMPLETE KONTROL software, you can also use it in MIDI mode as a versatile MIDI controller to pilot MIDI applications or devices, both via USB or via 5-pin DIN MIDI connections.

KOMPLETE KONTROL sends MIDI Note, Pitch Bend, and Channel Pressure (aftertouch) messages to trigger MIDI instruments, as well as Control Change and Program Change messages to control any MIDI application or device.

- When you switch on the keyboard and the displays show the message **PRESS BROWSE**, you are controlling an instance of the KOMPLETE KONTROL software.
- When you switch on the keyboard and the displays show various MIDI CC numbers, the keyboard is in MIDI mode. The keyboard directly launches into MIDI mode when the KOMPLETE KONTROL software is not running.

Switching to MIDI Mode

To switch the keyboard between controlling the KOMPLETE KONTROL software and MIDI mode:

1. Press **MIDI** on the keyboard.
2. To leave MIDI mode, press any button switching to another mode.



When using the KOMPLETE KONTROL plug-in in a supported host, the keyboard automatically switches between controlling the KOMPLETE KONTROL software and MIDI mode, depending on the content of the selected track.

MIDI Assignment

The MIDI mode's versatility is made possible by the MIDI Assignment editor, which allows you to freely define MIDI assignments for the controls on the keyboard. For more information, refer to [↑8.4, Using the MIDI Assignment Editor](#).

1. Use the Page left / right buttons on the keyboard to switch between Pages you created in the MIDI Assignment editor.
2. Use the **PRESET** up/down buttons on the keyboard to switch between Templates you created in the MIDI Assignment editor.

8.3 Using the Keyboard as Stand-Alone MIDI Controller

If you power up the KOMplete KONTROL keyboard without a USB connection (while the power supply is connected), you can use it as a stand-alone MIDI controller by connecting MIDI devices to the 5-pin DIN MIDI sockets on the keyboard's rear panel.

The keybed and the controls on the keyboard send out the following MIDI messages:

Control Element	Message Type	CC#	Mode / Type	Range / Values	Control Function
Pedal A	Controller	Tip 64 Ring 65	Gate	0-127	Damper Pedal On / Off (Sustain)
Pedal B	Controller	11	-	0-127	Expression Controller
Pitch Wheel	Pitch Bend	-	-	0-16384	Pitch Bend
Modulation Wheel	Controller	1	-	0-127	Modulation Wheel or Lever
Touch Strip	Controller	11	Mode: Standard Display: Unipolar LED Mode: Bar	0-127	Expression Controller
Encoder 1	Controller	14	Absolute	0-127	Undefined
Encoder 2	Controller	15	Absolute	0-127	Undefined
Encoder 3	Controller	16	Absolute	0-127	General Purpose Controller 1
Encoder 4	Controller	17	Absolute	0-127	General Purpose Controller 2
Encoder 5	Controller	18	Absolute	0-127	General Purpose Controller 3
Encoder 6	Controller	19	Absolute	0-127	General Purpose Controller 4
Encoder 7	Controller	20	Absolute	0-127	Undefined
Encoder 8	Controller	21	Absolute	0-127	Undefined

Control Element	Message Type	CC#	Mode / Type	Range / Values	Control Function
Button 1	Controller	112	Toggle (Action on Down)	Off 0 / On 127	Undefined
Button 2	Controller	113	Toggle (Action on Down)	Off 0 / On 127	Undefined
Button 3	Controller	114	Toggle (Action on Down)	Off 0 / On 127	Undefined
Button 4	Controller	115	Toggle (Action on Down)	Off 0 / On 127	Undefined
Button 5	Controller	116	Toggle (Action on Down)	Off 0 / On 127	Undefined
Button 6	Controller	117	Toggle (Action on Down)	Off 0 / On 127	Undefined
Button 7	Controller	118	Toggle (Action on Down)	Off 0 / On 127	Undefined
Button 8	Controller	119	Toggle (Action on Down)	Off 0 / On 127	Undefined

8.4 Using the MIDI Assignment Editor

This section guides you through the process of assigning MIDI messages to control elements using the MIDI Assignment editor. In the KOMPLETE KONTROL stand-alone application, the Panic button and CPU meter are replaced by the MIDI Assignment editor button. This button lets you access all the settings related to the keyboard's MIDI mode.



MIDI Assignment editor button.



When using the MIDI Assignment editor, all keyboard controls (i.e. navigation, transport, etc.) are blocked.

8.4.1 The Mapping System

Whatever you do on the keyboard, the MIDI Assignment editor translates it into a MIDI message that is then sent to the desired MIDI port — this is what the MIDI Assignment editor is all about: mapping human actions to MIDI events.

The MIDI Assignment editor's mapping system is structured in a way that allows you to efficiently organize your assignments. This makes the whole mapping process a lot easier and informs you about what will happen whenever you actuate a control element on the keyboard. The next paragraphs will introduce you to some basic concepts.

Assignments

An assignment defines which MIDI event is triggered by a particular control element. Available MIDI event types are “MIDI Note,” “MIDI CC,” etc. Every action on a control element is translated into one MIDI event, the corresponding assignment defines the rules of that translation.

Depending on the type of control element (button, knob, pedal input, Touch Strip, ...), the available assignments differ.

Pages

You can have multiple assignments, organized within Pages. A Page is a set of assignments for all control elements in this Page area. One Page can be selected (and loaded) at a time. You can switch the available Pages via the Page list in the Inspector. You can do it as well from the keyboard.

When you select another Page, all assignments for the control elements in the Page area are updated accordingly.

Templates

A Template holds a mapping configuration for all control elements on the keyboard, including all Pages that might exist. One Template can be selected at a time. Switching between different Templates can be used, for example, to address different applications on your computer or different MIDI instruments.

The Template contains all Page data, including (for each type of Pages) the list of Pages and the index of the last selected Page.



The configuration of the Touch Strips is saved globally and not per Template. This means all settings made under **TOUCHSTRIP** remain the same when switching between Templates.


8.4.2 Assigning MIDI Messages to Control Elements

The workflow of assigning MIDI messages applies to all types of control elements and is as follows:


1. Click on the MIDI Assignment editor button to open the MIDI Assignment editor.




2. Select or create a Template in the Templates pane.

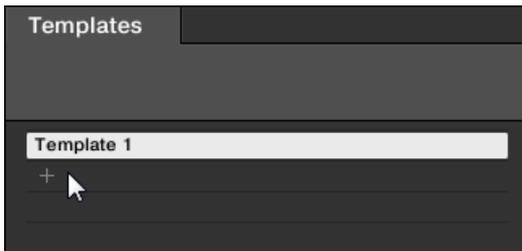


3. Select the type of control element.



4. Select the control element you want to assign a MIDI message to.

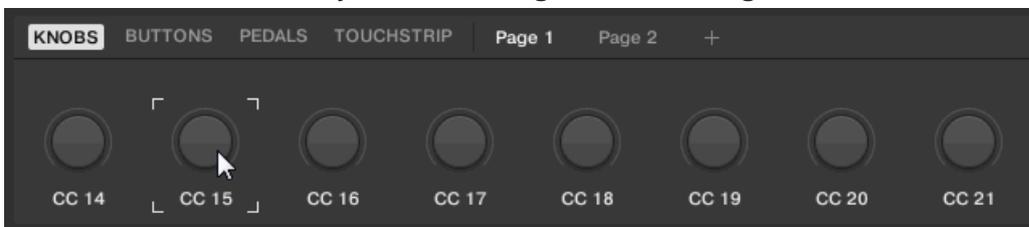

- Define the MIDI message using the several drop-down menus and options in the Definition area.

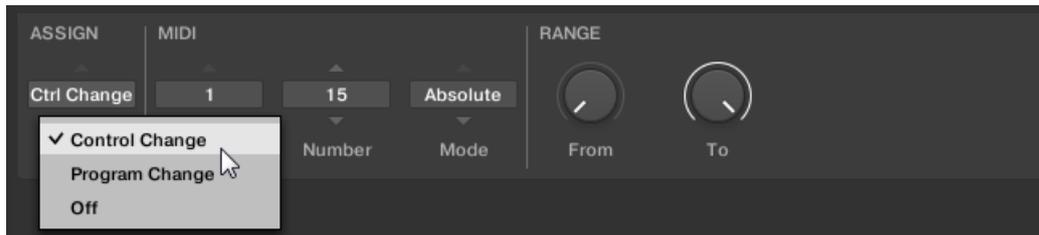

- ⇒ The available drop-down menus and options in the Definition area vary depending on the selected type of control element as well as from the selections in the Definition area itself.
- If required select or create another page for making multiple assignments.



- When you finished assigning MIDI messages, close the MIDI Assignment editor.
- Your edits are saved to the Template(s).

8.4.3 Renaming Control Elements

Apart from assigning MIDI messages you can also rename the control element to your liking.

- Double-click on name of the control element.



2. Enter the desired name with a maximum length of seven characters.



3. Press the enter key to confirm.

→ The name of the control element has been changed.



Renaming Templates and Pages is not possible.

8.4.4 MIDI Message Types – Type Menu

For all control elements, the assignment definition starts with the same menu: the **Type menu**.

The **Type** drop-down menu specifies the type of MIDI message that has to be sent upon action on this control element. Depending on the type of control element, the entries in this menu will differ (for example, sending a “play” command from a knob wouldn’t make much sense).

All other parameters displayed in the Definition area depend both on the type of control element that you are working on, and on the type of MIDI message selected in this **Type** menu.

Below is a list of all possible MIDI message types to be found in the **Type** menu.

- **Control Change:** Sends MIDI Control Change messages on a specific MIDI channel set by the **Channel** parameter (range from 1 to 16, 1 by default). This message changes the value of a specific continuous controller of the MIDI destination — controlling for example some effect’s depth in your music application. The continuous controller (CC) number is specified via the **Number** parameter (range from 0 to 127). The values to be sent for that controller are specified in various ways, depending on the type of the selected control element (see next sections).

- **Program Change:** Sends MIDI Program Change messages on a specific MIDI channel set by the **Channel** parameter (range from 1 to 16, 1 by default). This message switches to another program (or patch, preset...) of the MIDI destination. The program number to be sent can be specified in various ways, depending on the type of the selected control element (see next sections).
- **Note:** Sends MIDI Note On/Off messages on a specific MIDI channel set by the **Channel** parameter (range from 1 to 16, 1 by default). These messages start and stop MIDI notes specified by the **Note** parameter (range from C-2 to G8), at a velocity set by the **Value** parameter (range from 0-127).
- **Pitchbend:** Sends MIDI pitchbend messages on a specific MIDI channel set by the **Channel** parameter (range from 1 to 16, 1 by default). This message changes the pitch of the MIDI notes sent on the same MIDI channel. Depending on the MIDI destination, it can also be used to control other parameters.
- **Off:** Deactivates MIDI for the control element. Select this entry to disable the control element or action. The control element/action does not send any MIDI message, hence no parameter is displayed.

8.4.5 Assignments for Knobs

For the Knobs, the **Type** menu offers the entries *Control Change* and *Program Change*. Depending on the selected entry, a different set of additional parameters is available:

Type	Mode	RANGE	Number	Step
<i>Control Change</i>	<i>Absolute</i>	From 0-126 / To 1-127	0-127	
	<i>Relative</i>			-32 to 31
	<i>Relative (Offset)</i>			-32 to 31
<i>Program Change</i>		From 0-126 / To 1-127		

Mode Menu Values for Knobs

For the type Control Change, a **Mode** menu allows you to select between three operating modes:

- **Absolute:** In this mode the control element sends absolute values. The **From**, **To**, and **Resolution** parameters are the same as for the other message types (see above).
- **Relative:** In this mode the sent message is in a +1/-1 fashion — actually 1/127, which is then understood by the target software as +1/-1 in that case. This allows the control element to set the new Control Change value relative to its current value. Two parameters are available:
 - **Step:** Defines the increment to use. Increase the **Step** value to trigger greater jumps in the target parameter value. If you choose a negative value for **Step**, the control will be inverted.
 - **Resolution:** Adjusts the sensitivity of the control element to your actions. At high **Resolution** values, a little movement of the control element will be enough to trigger the message. At lower **Resolution** values, you will have to move it more frankly to trigger the message.
- **Relative (Offset):** This mode is similar to the Relative mode explained above, with the difference that here the values sent for the “+1” and “-1” messages are 65 and 63, respectively — in other terms, they are centered around 64 instead of 0. This is well suited for some particular software implementations. As in Relative mode, a **Step** parameter defines the increment to use, and a **Resolution** parameter adjusts the sensitivity of the control element to your actions.

8.4.6 Assignments for Buttons

For the Buttons, the **Type** menu offers the entries *Control Change*, *Program Change*, and *Note*. Depending on the selected entry, a different set of additional parameters is available:

Type	Mode	Value	Number	Note
<i>Control Change</i>	<i>Toggle</i>	Off/On 0-127	0-127	
	<i>Trigger</i>	0 - 127		
<i>Program Change</i>	<i>Toggle</i>	Off/On 0-127		
	<i>Trigger</i>	0 - 127		
<i>Note</i>	<i>Toggle</i>	0 - 127		C-2 – G8
	<i>Gate</i>	0 - 127		C-2 – G8

Mode Menu Values for Buttons

For the buttons control elements listed in the above table, and only for some of the MIDI message types available for these control elements, you can choose from different behaviors for the way the data is sent. This is controlled by the **Mode** menu. This menu can have up to four entries, depending on the message type that you have selected in the **Type** menu. Here is the list of all possible entries:

- **Toggle:** In this mode, the control element has two states, on and off. When you press once, it switches to the on state — when you press again, it switches to the off state. For instance, this can be useful for enabling and disabling an effect and check how it affects the original sound. In this mode, there are two **VALUE** settings: **Off** defines the value for the off state (from 0 to 127, 0 by default), and **On** defines the value for the on state (0 to 127, 127 by default). For the *Note* message type, since the off state is predefined (it's the MIDI Note Off message), you find instead a single **VALUE** setting defining the velocity of the MIDI Note On message.
- **Trigger:** In this mode, only one message is sent when you hit the control element. For instance, this can be useful for switching to another program (preset, patch...) or for triggering one-shot samples (e.g. drum sounds or any other envelope-controlled sounds). In this mode, you thus find only one **VALUE** setting, defining the value to be sent when you hit the control element. It goes from 0 to 127 (127 by default).

- **Gate:** In this mode, which is only available for the *Note* message type, the control element sends MIDI Note messages. When you press a control element, it sends a MIDI Note On message — when you release the control element, it sends a MIDI Note Off message. For instance, this can be useful to temporarily enable an effect while playing. Since the off state is predefined (it's the MIDI Note Off message), you find instead a single **VALUE** setting defining the velocity of the MIDI Note On message.

8.4.7 Assignments for the Touch Strip

For the Touch Strip, the **Type** menu offers the entries *Control Change* and *Pitchbend*. Depending on the selected entry, a different set of additional parameters is available:

Type	Range	Number	Strength
<i>Control Change</i>	From 0-126/To 1-127	0-127	
<i>Pitchbend</i>			0-100%



Selecting a **Type** also changes the behavior of Touch Strip. When *Control Change* is selected, the Touch Strip can be used like a fader that retains its position even after you have removed your finger. When *Pitchbend* is selected, the Touch Strip behaves like a spring that returns to zero position after you have removed your finger.

For *Control Change*, you can set the **Range** of values that is sent when swiping the Touch Strip, and the **Number** of the Control Change message. For *Pitchbend*, you can set the **Strength** of the Touch Strip's spring behavior. As you increase this value, the Touch Strip returns to the zero position more quickly.



The configuration of the Touch Strips is saved globally and not per Template. This means all settings made under **TOUCHSTRIP** remain the same when switching between Templates.

8.4.8 Assignments for Pedals (Switch)

For Pedals used as switch, the **Type** menu offers the entries *Control Change* and *Program Change*. Depending on the selected entry, a different set of additional parameters is available:

Type Value	Mode Value	Range	Value	Number	Step	Wrap
<i>Control Change</i>	<i>Toggle/Gate</i>		Off/On 0-127	0-127		
	<i>Trigger</i>		0 - 127	0-127		
	<i>Inc</i>	Min/Max (0-127)			-128 to 127	On/Off
<i>Program Change</i>	<i>Toggle/Gate</i>		Off/On 0-127			
	<i>Trigger</i>		0 - 127			
	<i>Inc</i>	Min/Max 0-127			-128 to 127	On/Off

Mode Menu Values for Pedals (Switch)

For the button-like control elements listed in the above table, and only for some of the MIDI message types available for these control elements, you can choose from different behaviors for the way the data is sent. This is controlled by the **Mode** menu. This menu can have up to four entries, depending on the message type that you have selected in the **Type** menu. Here is the list of all possible entries:

- **Toggle:** In this mode, the control element has two states, On and Off. If you press once, it switches to the On state — if you press again, it switches to the Off state. This can be useful for example for activating some effect, then deactivating it later. This is usually the default mode. In this mode, you find two numeric fields: **Off Value** defines the value for the Off state (from 0 to 127, 0 by default), and **On Value** defines the value for the On state (0 to 127, 127 by default). For the Note message type, since the Off state is predefined (it's the MIDI Note Off message), you find instead a single **Value** parameter defining the velocity of the MIDI Note On message.

- **Gate:** This mode is equal to Toggle with the difference that the state is active for the time the Pedal is held depressed. In Toggle mode the state is activated until the next time the Pedal is pressed again.
- **Trigger:** In this mode, only one message is sent when you hit the control element. There are no On or Off states. For example, this can be useful for switching to another program (pre-set, patch...) or for triggering one-shot samples (e.g. drum sounds or any other envelope-controlled sounds). In this mode, you thus find only one numeric field called **Value**, defining the value to be sent when you hit the control element. It goes from 0 to 127 (127 by default).
- **Inc:** In this mode you can configure the press of a pedal to step through a list of values by choosing the size of the jump (e.g. 1-2-3-4-5, 2-4-6-8-10 or 3-6-9-12-15), and whether or not the values wrap around back to the beginning, or stop when they reach their minimum or maximum.

8.4.9 Assignments for Pedals (Continuous)

For Pedals used as continuous control, the **Type** menu offers the entries *Control Change* and *Program Change*. Depending on the selected entry, a different set of additional parameters is available:

Type	Mode	Range	Number
<i>Control Change</i>		From 0-126 / To 1-127	0-127
<i>Program Change</i>		From 0-126 / To 1-127	

For *Control Change*, you can set the **Range** of values that is sent when pressing the pedal, and the **Number** of the Control Change message. For *Program Change*, you can set the **Range** of values that is sent when pressing the pedal.

9 Host Integration

When using advanced host integration, the KOMPLETE KONTROL keyboard becomes the centerpiece of your studio setup. You can use it to control not only the Instrument or plug-in loaded in KOMPLETE KONTROL but also core functionality of supported hosts.



Before you can make use of advanced host integration you need to set it up first. For more information, refer to [↑4.3, Setting up Host Integration](#).

Advanced integration of KOMPLETE KONTROL is available in the following hosts:

- MASCHINE 2
- Apple Logic Pro X
- Apple GarageBand
- Ableton Live 9
- Steinberg Cubase Artist 8.5/9/9.5
- Steinberg Cubase Pro 8.5/9/9.5
- Steinberg Nuendo 7/8

9.1 Integration with MASCHINE

If you own MASCHINE, you can control many of MASCHINE's functions directly from the KOMPLETE KONTROL keyboard. Furthermore, the Arrange buttons located at the left of the keyboard's displays give you access to certain modes and views of the MASCHINE software that makes the integration of KOMPLETE KONTROL into MASCHINE straight-forward. This section gives you an overview of the basic controls functions as well as of the advanced integration controls using the Arrange buttons.

In order to connect the KOMPLETE KONTROL keyboard to the MASCHINE software:

- ▶ Click on the Keyboard icon in the Header.



Connect to MASCHINE using the Keyboard

1. Press **INSTANCE** on the keyboard.
2. Select the MASCHINE instance shown in the display.
3. Press Button 8 (**SELECT**) to connect the keyboard to MASCHINE.

9.1.1 Basic Control Functions

The available basic control functions of MASCHINE mapped to the keyboard's controls are grouped in the tables below.

TRANSPORT Control

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Start/stop playback	PLAY
Restart playback at the beginning of the Loop Range	SHIFT + PLAY (RESTART)
Enable/disable recording	REC (COUNT-IN)
Record with count-in	SHIFT + REC (COUNT-IN)
Stop playback/recording	STOP
Enable/disable the metronome	METRO
Adjust Tempo	TEMPO + Knob 1
Enable/disable Loop	LOOP

PERFORM Control

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Enable/disable Scale engine for selected Group	SCALE (Edit)
Enable/disable Arpeggiator for selected Group	ARP (Edit)
Edit Scale engine for selected Group	SHIFT + SCALE (Edit)
Edit Arpeggiator for selected Group	SHIFT + ARP (Edit)
Display quantization settings	QUANTIZE
Enable/disable quantization grid	QUANTIZE + Knob 1
Adjust quantization value	QUANTIZE + Knob 2
Enable/disable automation	AUTO
Undo action	UNDO (Redo)
Redo action	SHIFT + UNDO (Redo)

Navigation

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Select previous Preset file	PRESET Up
Select next Preset file	PRESET Down
Select previous Plug-in page	Page Left
Select next Plug-in page	Page Right

Mode Buttons

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Open Browser	BROWSER
Open Plug-in view	PLUG-IN
Open Mix mode	MIXER
Switch between MASCHINE and KOMPLETE KONTROL instances	INSTANCE
Enter MIDI Mode	MIDI
Display hardware serial number and firmware version, and change display brightness	SETUP

9.1.2 Advanced Integration Control Functions

The advanced integration controls using the Arrange buttons located to the left of the KOM-LETE KONTROL keyboard's displays and the MIXER button are listed below.

Ideas View

When you press SCENE on the KOMLETE KONTROL S-Series, you are presented with the Ideas view in the displays. This view is identical to the Ideas view of the MASCHINE software and gives you instant control over Scenes and Patterns.




MASCHINE's Ideas view on the KOMLETE KONTROL keyboard.

In the Ideas view you can perform the following actions:

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Select Scene or create new Scene, respectively	Button 1–8
Select another Pattern in Scene and select the corresponding Group in touch	Knob 1–8
Insert copy of selected Scene	SHIFT + Button 4 (DUPLICATE)
Insert empty Scene	SHIFT + Button 5 (INSERT)
Delete selected Scene	SHIFT + Button 6 (DELETE)
When enabled, the next Scene that is selected will be forced to play from start	SHIFT + Button 8 (RETRIGGER)
Delete selected Pattern	CLEAR

Pattern View

When you press **PATTERN** on the keyboard, you are presented with the Pattern view in the displays. The Pattern view is the recommended view for recording.

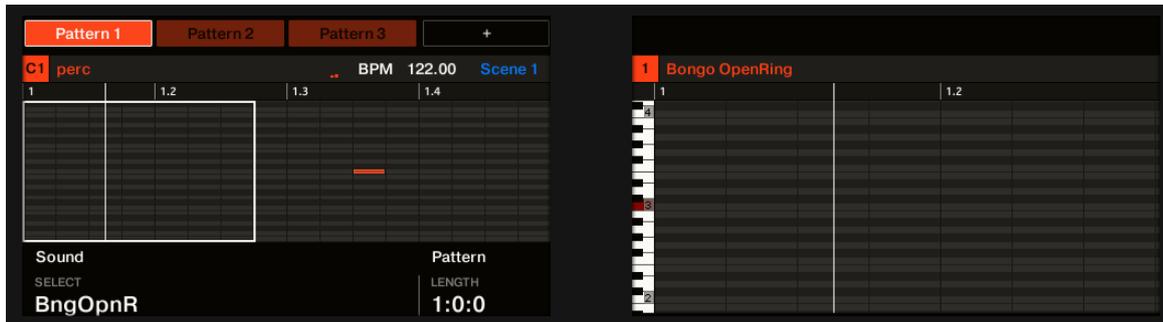

MASCHINE's Pattern view on the KOMPLETE KONTROL keyboard.

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Select Pattern or create new Pattern for the selected Scene	Button 1–8
Select another Sound in Pattern	Knob 1
Select another Pattern	Turn 4-D encoder or Move 4-D encoder up or down
Select another Group	Move 4-D encoder to the left or to the right
Double Pattern length	SHIFT + Button 3 (DOUBLE)
Insert copy of selected Pattern	SHIFT + Button 4 (DUPLICATE)
Insert empty Pattern	SHIFT + Button 5 (INSERT)
Delete selected Pattern	SHIFT + Button 6 (DELETE)
Adjust Pattern length	Knob 4
Zoom in or zoom out the Pattern view	Knob 5
Horizontally move visible area in the displays	Knob 6
Vertically move the visible area of the Pattern in the display, if notes are residing out of the visible area	Knob 7
Delete Pattern content	CLEAR

TRACK View

When you press and hold **TRACK** on the keyboard, you are presented with the Track view in the displays. The Track view is available from every view and can be used for quickly selecting Groups and Sounds. In other words, it works like a shortcut page. The Track view stays visible as long as the **TRACK** button is depressed.



Track view on the KOMPLETE KONTROL keyboard.

In the Track view you can perform the following actions:

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Jump to another Group	TRACK + Button 1–8
Select another Sound of that Group	TRACK + Knob 1–8
Select the Group in the previous/next Scene	TRACK + move 4-D encoder to the left or to the right
Browse and select another Sound in selected Group	TRACK + turn 4-D encoder
Delete selected Group	CLEAR

Mix Mode

When you press **MIXER** on the keyboard, you are presented with the Mix mode in the displays. The Mix mode displays eight of 16 channel strips with Sounds and Groups. The further eight Sounds can be displayed by pressing the Page buttons.




Mix mode on the KOMLETE KONTROL keyboard.

In Mix mode you can perform the following actions:

Action in MASCHINE	Button on KOMLETE KONTROL S-Series
Toggle between volume and panorama control for Knob 1–8	Press 4-D encoder
Set Button 1–8 to control Group mode	Move 4-D encoder up
Set Button 1–8 to control Sound mode	Move 4-D encoder down
Jump to another Group in Group mode	Button 1–8
Jump to another Sound in Sound mode	Button 1–8
Coarse adjust output volume of the respective Group or Sound	Knob 1-8
Fine adjust output volume of the respective Group or Sound	SHIFT + Knob 1–8
Select previous or next Sound or another Group	Move 4-D encoder to the left or to the right
Coarse adjust output volume of selected Group or Sound	Turn 4-D encoder
Fine adjust output volume of selected Group or Sound	SHIFT + Turn 4-D encoder

Plug-In View

When you press **PLUG-IN** on the keyboard, you are presented with the Plug-in view in the displays. The Page buttons give access to other pages containing further functions to control the selected Plug-in with the keyboard.

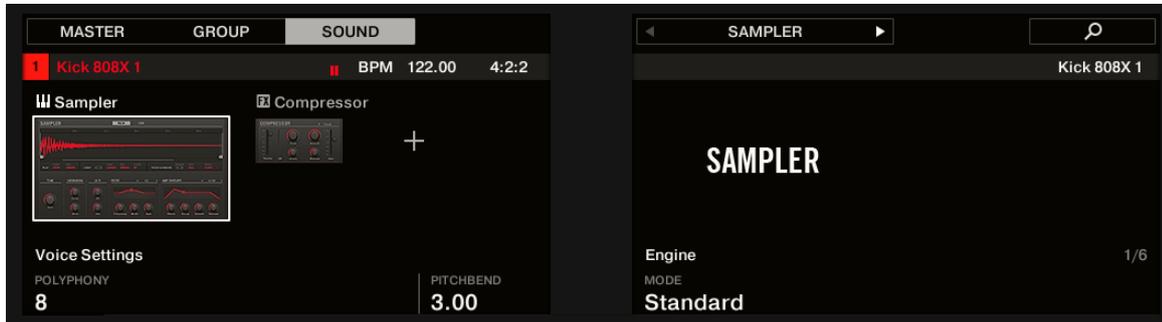


Plug-in view on the KOMPLETE KONTROL keyboard.

In the Plug-in view you can perform the following actions:

Action in MASCHINE	Button on KOMPLETE KONTROL S-Series
Select MASTER channel	Button 1 (MASTER)
Select GROUP channel	Button 2 (GROUP)
Select SOUND channel	Button 3 (SOUND)
Select next or previous Plug-in in Plug-in chain or in Plug-in Browser	Button 5 and 6
Quick browse Preset files for selected Plug-in	Button 8
Select Preset files in Quick browse	Push 4-D encoder
Select next or previous parameter page	Page Left/Page Right
Adjust parameter values	Knob 1–8
Select another Plug-in in Plug-in chain	Move 4-D encoder left/right
Open Plug-in Browser	Push 4-D encoder
Select Plug-in	Turn 4-D encoder
Insert Plug-in	Push 4-D encoder
Delete Plug-in from Plug-in chain	CLEAR

Key Mode

When you press **KEY MODE** on the keyboard, you are presented with the Key mode in the displays. When the Key mode is active the Keybed and Light Guide reflect the PADs behavior and PADs colors as of the MASCHINE controller.

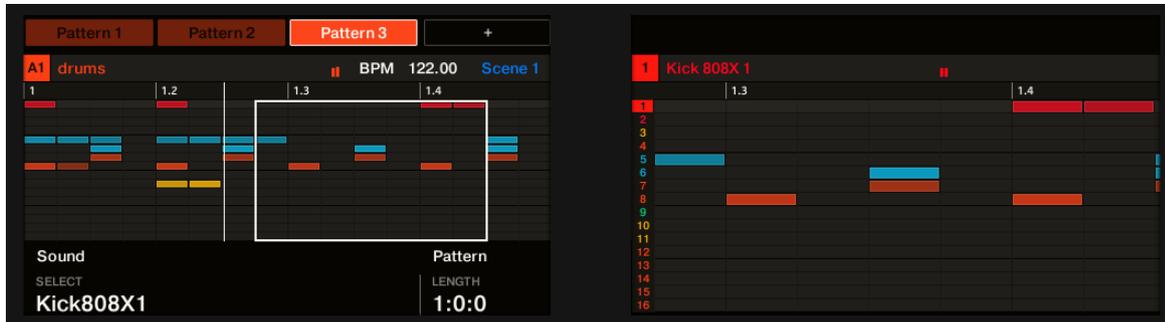

Key mode on the KOMLETE KONTROL keyboard.

9.2 Integration with Apple Logic Pro X and GarageBand

If you own Apple Logic Pro X or GarageBand, you can control many of their functions directly from the KOMLETE KONTROL keyboard. The available functions mapped to the sections of the keyboard are listed below.

For more information on how to set up Host Integration with Ableton Live, refer to [↑4.3.1, Setting up Apple Logic Pro X and GarageBand](#).

Transport Control

Action in Logic Pro X and GarageBand	Button on KOMPLETE KONTROL S-Series
Start playback	PLAY (Restart)
Restart playback	SHIFT + PLAY (Restart)
Start recording	REC (Count-In)
Punch out when recording	PLAY (Restart)
Punch in when playing	REC (Count-In)
Stop playback/recording at current position	STOP
Relocate playhead position to song start when stopped	STOP
Scroll playhead position	Turn 4-D encoder
Enable/disable count-in	SHIFT + REC (Count-In)
Enable/disable metronome	METRO
Enable/disable loop mode	LOOP
Move Loop by its own length	LOOP + turn 4-D encoder
Tap tempo	TEMPO

Edit Control

Action in Logic Pro X and GarageBand	Button on KOMPLETE KONTROL S-Series
Undo action	UNDO (Redo)
Redo action	SHIFT + UNDO (Redo)
Quantize to grid value	QUANTIZE
Toggle automation between Read mode and Touch mode	AUTO
Enable/disable Scale engine	SCALE (Edit)
Change Scale engine parameters	SHIFT + SCALE (Edit)
Enable/disable Arpeggiator	ARP (Edit)

Mute and Solo

Action in Logic Pro X and GarageBand	Button on KOMPLETE KONTROL S-Series
Mute/unmute selected Track	M
Solo/unsolo selected Track	S

Track Navigation

Action in Logic Pro X and GarageBand	Button on KOMPLETE KONTROL S-Series
Select previous/next track	Move 4-D encoder left/right
Select previous/next Region	Move 4-D encoder up/down

Mixer Controls

Action in Logic Pro X and GarageBand	Button on KOMPLETE KONTROL S-Series
Mute/unmute track	M + Button 1–8
Solo/unsolo track	S + Button 1–8
Jump to track	Button 1–8
Switch Bank	Page Left/Page Right
Set Knob 1–8 to control panorama	SHIFT + move 4-D encoder up
Set Knob 1–8 to control volume	SHIFT + move 4-D encoder down
Select previous Track	Move 4-D encoder left
Select next Track	Move 4-D encoder right
Coarse adjust panorama/volume for selected track	Knob 1–8
Fine adjust panorama/volume for selected track	SHIFT + Knob 1–8

9.3 Integration with Ableton Live

If you own Ableton Live, you can control many of its functions directly from the KOMPLETE KONTROL keyboard. The available functions mapped to the sections of the keyboard are listed below.

For more information on how to set up Host Integration with Ableton Live, refer to [↑4.3.3, Setting up Ableton Live \(macOS\)](#) respectively [↑4.3.4, Setting up Ableton Live \(Windows\)](#).



The following functionality descriptions apply to the default Ableton Live setup. If e.g. different playback settings have been selected the functionality will respect those settings.

Transport Control

Action in Ableton Live	Button on KOMPLETE KONTROL S-Series
Start playback	PLAY (Restart)
Start recording	REC (Count-In)
Restart playback/recording	PLAY (Restart)
Stop playback/recording at current position	STOP
Relocate playhead position to song start when stopped	STOP
Start Arranger recording	SHIFT + REC (Count-In)
Scroll playhead position	Turn 4-D encoder
Enable/disable loop mode	LOOP
Enable/disable metronome	METRO
Tap tempo	TEMPO

Edit Control

Action in Ableton Live	Button on KOMPLETE KONTROL S-Series
Undo action	UNDO (Redo)
Redo action	SHIFT + UNDO (Redo)
Quantize to grid value	QUANTIZE
Toggle automation for selected Track on/off	AUTO
Enable/disable Scale engine	SCALE (Edit)
Change Scale engine parameters	SHIFT + SCALE (Edit)
Enable/disable Arpeggiator	ARP (Edit)
Change Arpeggiator parameters	SHIFT + ARP (Edit)

Arranger Control

Action in Ableton Live	Button on KOMPLETE KONTROL S-Series
Select previous/next Track	Move 4-D encoder left/right
Select previous/next Clip Slot in Track	4-D encoder down/up
Start/stop selected Clip	Push 4-D encoder
Mute/unmute selected Track	M
Solo/unsolo selected Track	S

Mixer Control

Action in Ableton Live	Button on KOMPLETE KONTROL S-Series
Mute/unmute Channel	M + Button 1–8
Solo/unsolo Channel	S + Button 1–8
Jump to Track	Button 1–8
Select previous/next Track	Move 4-D encoder left/right
Switch Bank	Page Left/Page Right
Set Knob 1–8 to control panorama	SHIFT + move 4-D encoder up
Set Knob 1–8 to control volume	SHIFT + move 4-D encoder down
Show master output volume channel	SHIFT + Page Left/Page Right button
Coarse adjust panorama/volume of selected Track	Knob 1–8
Fine adjust panorama/volume for selected Track	SHIFT + Knob 1–8

9.4 Integration with Steinberg Cubase and Nuendo

If you own Steinberg Cubase or Nuendo, you can control many of their functions directly from the KOMPLETE KONTROL keyboard. The available functions mapped to the sections of the keyboard are listed below.

For more information on how to set up Host Integration with Cubase/Nuendo, refer to [↑4.3.2, Setting up Steinberg Cubase/Nuendo](#).

Transport Control

Action in Cubase and Nuendo	Button on KOMPLETE KONTROL S-Series
Start playback	PLAY (Restart)
Start recording	REC (Count-In)
Punch out while recording	PLAY (Restart)
Punch in while playing	REC (Count-In)
Stop playback/recording at current position	STOP
Relocate playhead position to song start when stopped	STOP
Scroll playhead position	Turn 4-D encoder
Enable/disable count-in	SHIFT + REC (Count-In)
Enable/disable metronome	METRO
Enable/disable loop mode	LOOP
Move loop by its own length	LOOP + turn 4-D encoder
Tap tempo	TEMPO

Editing

Action in Cubase and Nuendo	Button on KOMPLETE KONTROL S-Series
Undo action	UNDO (Redo)
Redo action	SHIFT + UNDO (Redo)
Set quantize to grid value	QUANTIZE
Enable/disable automation write	AUTO
Enable/disable Scale engine	SCALE (Edit)
Edit Scale engine parameters	SHIFT + SCALE (Edit)
Enable/disable Arpeggiator	ARP (Edit)
Edit Arpeggiator parameters	SHIFT + ARP (Edit)

Mute and Solo

Action in Cubase and Nuendo	Button on KOMPLETE KONTROL S-Series
Mute/unmute selected Track	M
Solo/unsolo selected Track	S

Track Navigation

Action in Cubase and Nuendo	Button on KOMPLETE KONTROL S-Series
Select previous/next track	Move 4-D encoder up/down
Select previous/next Region	Move 4-D encoder left/right

Mixer control

Action in Cubase and Nuendo	Button on KOMPLETE KONTROL S-Series
Mute/unmute track	M + Button 1–8
Solo/unsolo track	S + Button 1–8
Jump to track	Button 1–8
Select previous/next track	Move 4-D encoder left/right
Switch Bank	Page Left/Page Right
Set Knob 1–8 to control panorama	SHIFT + move 4-D encoder up
Set Knob 1–8 to control volume	SHIFT + move 4-D encoder down
Coarse adjust Panorama/Volume for selected Track	Knob 1–8
Fine adjust Panorama/Volume for selected Track	SHIFT + Knob 1–8

10 Browsing the Library

The Browser is the place where you can find and load Instruments, Effects, and Preset Files in KOMPLETE KONTROL as well as organizing your own Preset files. You will at first learn about the Browser basics followed by explaining the browsing workflows. This section details both, the workflows in the software and on the keyboard side by side.

Browsing Effects is identical to Browsing Instruments

This section covers only the workflows for browsing Instruments as the workflows for browsing Effects are identical. The Product Type Instrument or Effect cannot be selected in the Browser directly as this is determined by the Plug-in chain. For more information on Product Types and on switching between Product Types, refer to [↑10.1.1, Product Types: Instrument and Effect](#).

For detailed overview of the Browser elements, refer to [↑5.2, Browser](#).

10.1 Browser Basics

This section describes some general concepts about the Browser.

10.1.1 Product Types: Instrument and Effect

Although the Library contains Instruments and Effects, it is not possible to browse for these two Product Types at the same time. Depending on the selected Plug-in slot the Product Type in the Browser switches either to “Instrument” or “Effect”:

- When you start KOMPLETE KONTROL or when you select the first Plug-in Slot in the Plug-in chain, the Product Type is set to “Instrument” which is reflected by the respective icon in the Browser.



- Consequently, when you select any other Plug-in slot, the Product Type is set to “Effect” which is reflected by the respective icon in the Browser.



For more information on the Plug-in chain and usage, refer to [↑5.5, Plug-in Chain Panel](#) respectively [↑11, Working with Effects](#).

10.1.2 About the Library and Meta-Information

To organize, find, keep track of, and provide you thousands of Preset files at any time ready for loading, KOMplete KONTROL makes use of a **Library**. The Library contains the factory content of your KOMplete Instruments and NKS Instruments, Effects, as well as your own user content.

Tags

To help you find the right Preset file quickly and efficiently, the Library implements various techniques that go far beyond the classic folder structure of your operating system—the usage of tags. For example, each Preset file included in the Library contains tags which describe the Preset file according to following aspects:

- The **content type** of the Preset file, i.e. whether it originates from a Product’s factory library or if it was created by a user.
- The **Product** where the Preset files come from—this can include, e.g., a hierarchical structure with a Product category, a particular Product, and possibly a Bank of an Instrument.
- A variable amount of **tags** used to describe various characteristics of the file, for example, the type of effect, the sonic character, the context in which it is used—in a word, anything that might help you find the file.

Included Preset Files in the Library

The Preset files included in the Library are all KOMplete KONTROL-relevant files found in the folders whose paths are listed in the [Library](#) page of the [Preferences](#) panel.


You can also save the sounds you created in KOMPLETE KONTROL to the User content section of the [Library pane](#).

10.1.3 Browsing the Library vs. Browsing Your Hard Disks

Besides of browsing KOMPLETE KONTROL Library the Browser also allows you to navigate your file system in a classic way. For each way the Browser provides a single pane with its own tools:

- The [Library](#) pane allows you to browse the KOMPLETE KONTROL Library. This is the preferred way to search for files meeting particular musical requirements. This pane also allows you to tag your own Preset files to your liking.
- The [Files](#) pane allows you to browse your hard disks by using the hierarchical folder structure of your operating system. For example, you can use it to navigate KOMPLETE KONTROL-relevant files that have not been imported into the KOMPLETE KONTROL Library—and you can import them from there!

The [Library](#) pane respectively the [Files](#) pane can be accessed by clicking the corresponding tab at the top of the Browser.

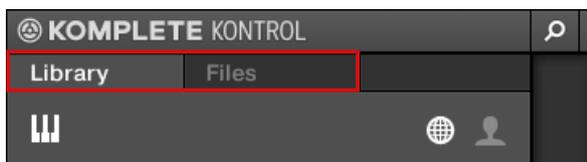


Click the desired tab to show the corresponding pane of the Browser.



Browsing and loading files from the file system using the KOMPLETE KONTROL keyboard is not possible. The Browser called up from the keyboard can only load files that have already been added to the Library. This is why you should always import all your files to the Library and tag them using the software Browser beforehand.

10.2 Opening the Browser

A click on the Browser button (the magnifier symbol) in the header opens and closes the Browser. You can also select *View > Browser* in the KOMPLETE KONTROL menu.

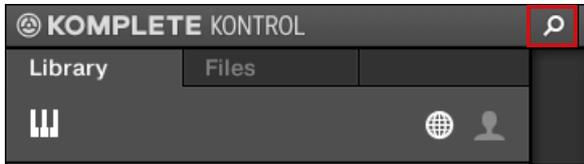


The Browser button in the header.



In stand-alone mode, you can also open/close the Browser from your computer keyboard via the [B] key.

Opening the Browser on the Keyboard

On the Plug-in page when the Plug-in chain is entirely empty the displays show No INSTRUMENT Loaded.

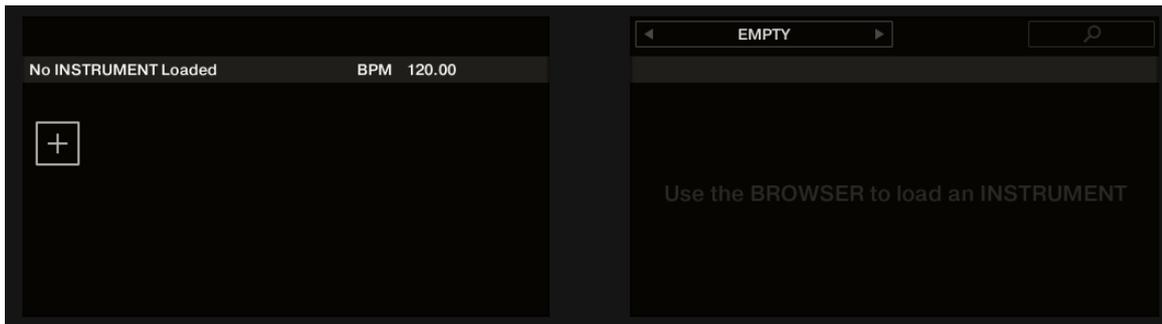


No Instrument loaded

In order to call up the Browser on the keyboard's displays:

- ▶ Press the **BROWSE** button.

10.3 Overview of the Browser on the Keyboard

On the displays of the keyboard, the Browser is organized as follows:

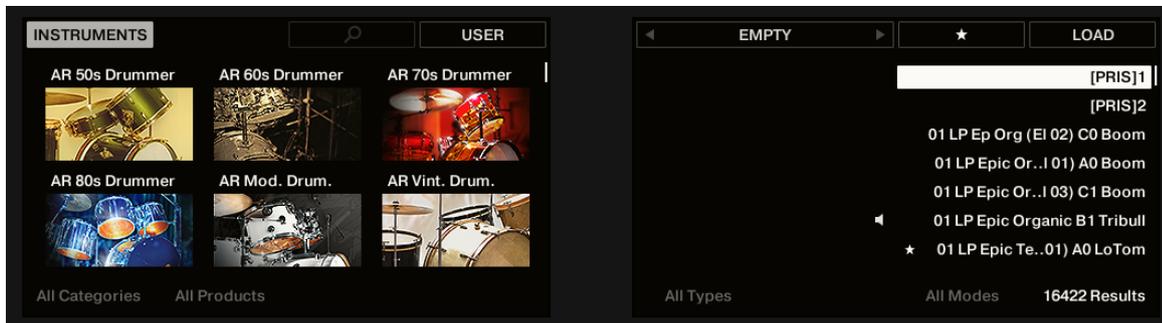


The Browser on the keyboard's displays.

- The left display allows you to narrow your search by selecting the content type (factory or user content), as well as a product category, a product, a bank, and a sub-bank.
- The right display allows to further refine your search by selecting the desired Type (and possibly Mode) tags. It also shows you the corresponding result list.

10.4 Choosing Between Factory Content and User Content

The Content selector shows two icons, one representing the factory content on the left, and one representing the user content on the right:

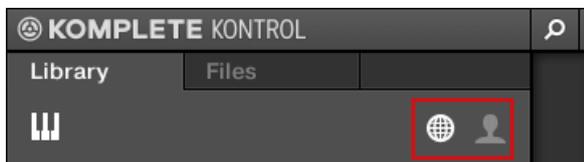


The Content selector.

- ▶ Click the NI icon to search the factory content, or click the User icon to search the user content.

Choosing Between Factory and User Content on the Keyboard


In order to choose between Factory and User content on the keyboard:

- ▶ Press Button 4 to choose between Factory content (USER off) and User content (USER on). By default, the Factory content is selected.

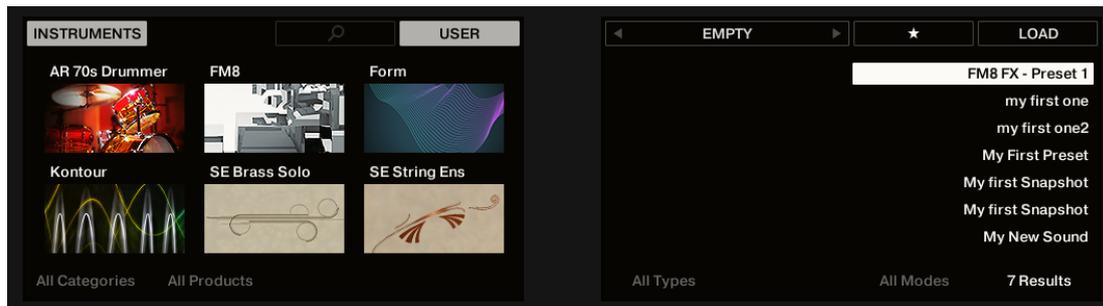

10.5 Loading an Instrument with its default Preset File


The Product selector allows you to limit your search to a certain Instrument category, a particular Instrument, or a specific Bank of the Instrument. You can load an Instrument along with its default Preset file directly from the Product selector in the Library pane. By default there is no particular selection in the Product selector header; it reads [All Instruments](#).

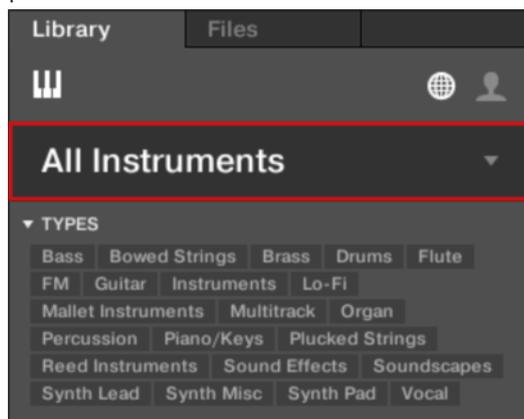


In order to load an Instrument:

1. Click on the Product selector header to open it.


- ⇒ The Product selector opens up, showing you all Instruments available in your KOM-
PLETE KONTROL Library.
- Sort the Instruments by **Category** or by **Vendor** using the Category / Vendor selector.

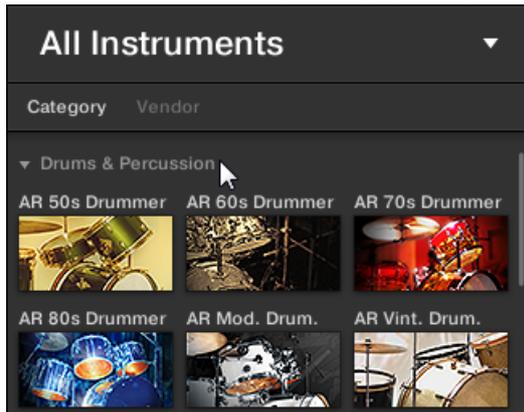

- Navigate through the Instrument groups to find the Instrument to your liking.
- Place the mouse over the Instrument entry in the Product selector and click on the arrow symbol that appears in the upper right corner of the Instrument entry.



- The Instrument with its default Preset file has been loaded into the first Plug-in slot of the Plug-in chain. With your selection the Product selector automatically closes, the Instrument name and icon appear in the Product selector header. You can now browse for all Preset files associated with your selection in the Results list.

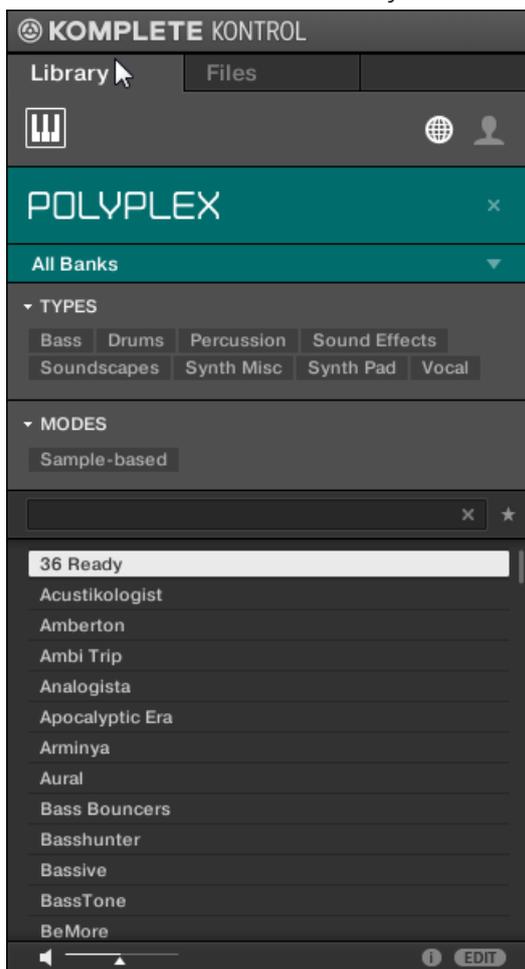


Instead of immediately loading an Instrument you also can get provided with all Preset files associated with the Instrument in the Results list by a click in the middle of the Instrument entry.


Loading an Instrument using the Keyboard

In order to load an Instrument on the keyboard:


1. Press and hold **SHIFT** to access the secondary Browser functions.

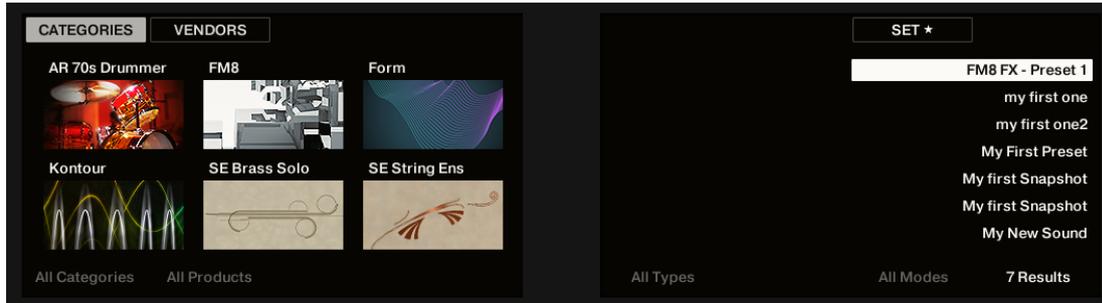

2. While holding **SHIFT** press Button 1 for sorting the Product list by **CATEGORY** or press Button 2 for sorting the Product list by **VENDOR**. By default the Product list is showing all Instruments.
3. Release **SHIFT**.
4. Turn Knob 1 to select a category or a vendor, respectively.

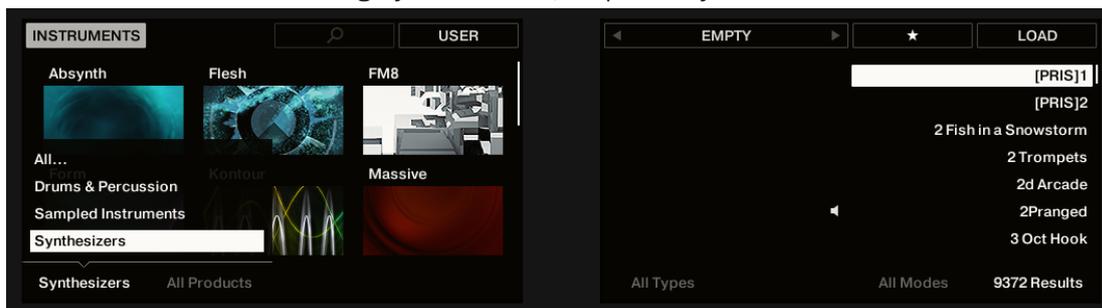


5. Turn Knob 2 to scroll through the Product list and find an Instrument to your liking.

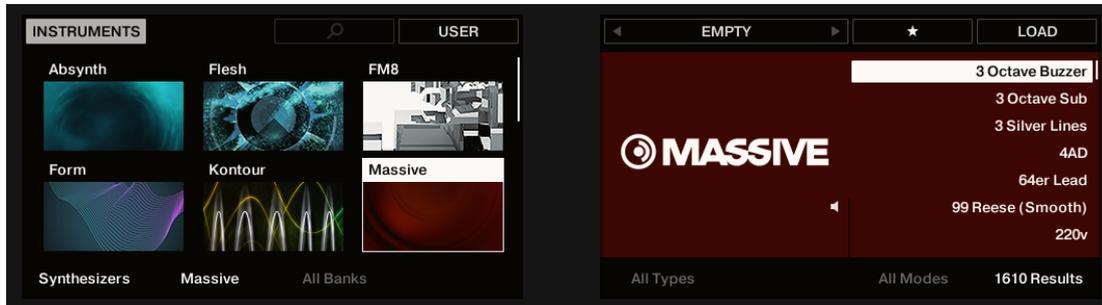

6. Press Button 8 to load the Instrument.


→ The Instrument with its default Preset file has been loaded into the first Plug-in slot of the Plug-in chain. You can now browse for all Preset files associated with your selection in the Results list.

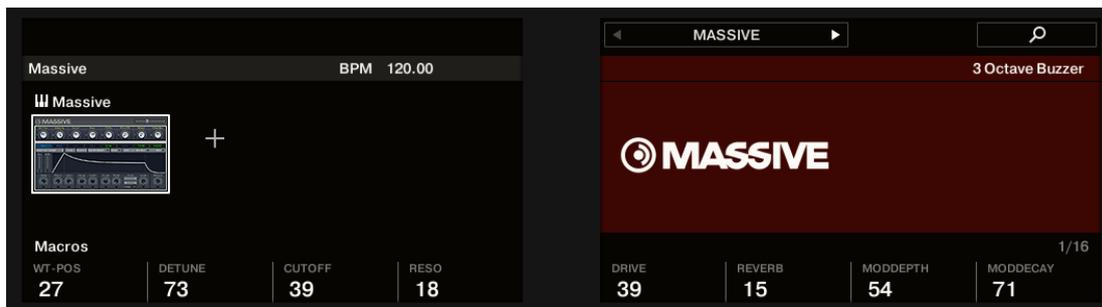

10.6 Filtering Instrument Preset Files by Bank

Banks can be additional Libraries (for example MASSIVE Expansions), different versions of the original Factory Library (for example FM7 Legacy and FM8 Factory Library), or any other content categorization specific to a particular Instrument.

When you select specific Instruments in the Product list, an additional **Bank drop-down menu** appears under the closed Product selector. The Bank drop-down menu allows you to select a particular Bank of Preset files for the selected Instrument.

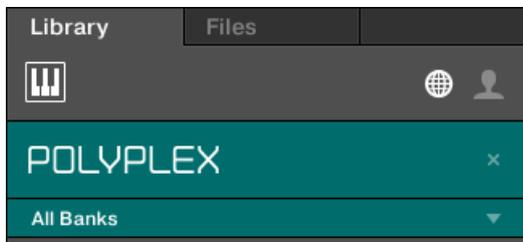


The Bank menu showing All Banks for POLYPLEX



Banks are not available for Effects.

To select a particular Bank of Preset files for the selected Instrument:

1. Click the arrow under the Instrument icon to open the Bank drop-down menu.
2. Choose a Bank from the available entries.

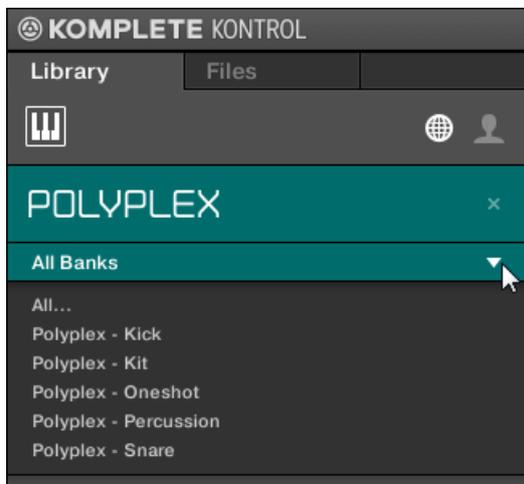


→ Upon your selection the Bank drop-down menu closes and displays the selected Bank. The results list underneath further narrow its content accordingly.

As with the Instrument selection, you can remove the selected Bank by clicking the little cross next to the Bank name in the closed drop-down menu.

Filtering Instrument Preset Files by Bank using the Keyboard

In order to select a particular Preset File Bank of the selected Instrument:

- ▶ Turn Knob 3 to select the desired Bank of the Instrument.

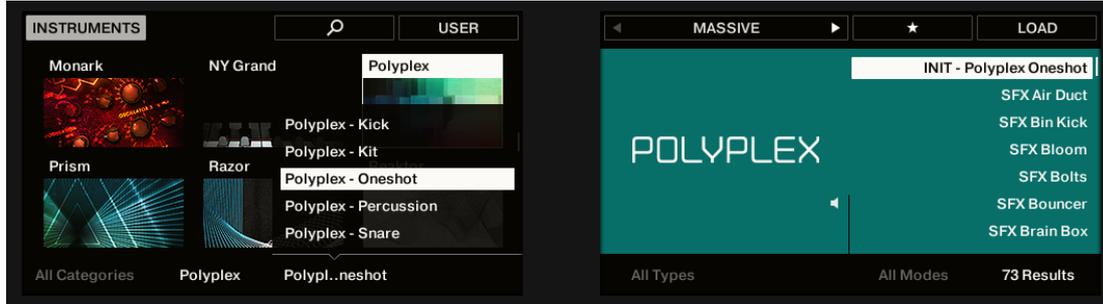


→ The Results list only displays the associated Preset files.

10.7 Resetting the Selection

In order to select another Instrument or Effect, or show Preset files for all Instruments or Effects in your KOMPLETE KONTROL Library, you have to reset the selection:

To reset the selection made in the Product selector:

- ▶ Click the little cross at the right of the Instrument name.

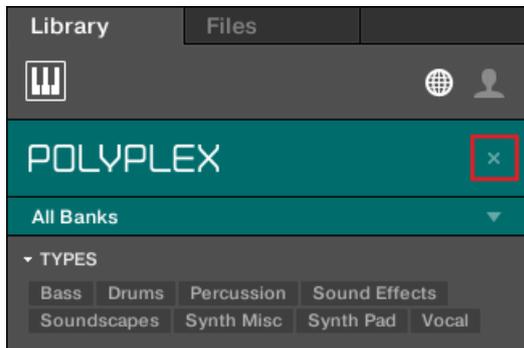

→ The selection is reset. The Product selector displays the generic label **All Instruments** or **All Effects**. The **TYPES** and **MODES** filters and the Results list under the Product selector now includes Preset files for all Instruments respectively Effects.




Products are shown in the Product selector only if the Library contains files for them. If a particular Instrument does not show up, make sure that it is installed correctly and has been updated to the latest available version.

Resetting the Instrument Selection on the Keyboard

To reset the Instrument selection:

- ▶ Turn Knob 2 anti-clockwise until **ALL PRODUCTS** is shown above in the display.

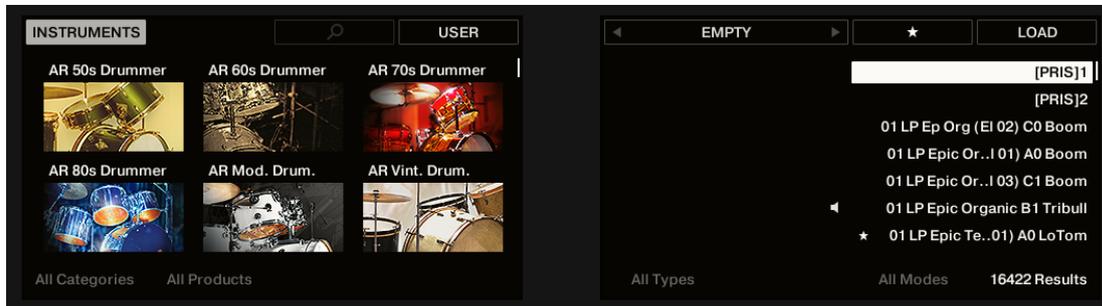


→ The Instrument selection is reset.

10.8 Types and Modes Tag Filters



The **MODES** tag filter is not available when browsing Effects.

The **TYPES** and **MODES** tag filter menus appear under the Product selector allow you to search for Preset files according to particular characteristics of a sound. Recommended but not mandatorily the **TYPES** and **MODES** tag filters bring best results in combination with a selected Instrument.

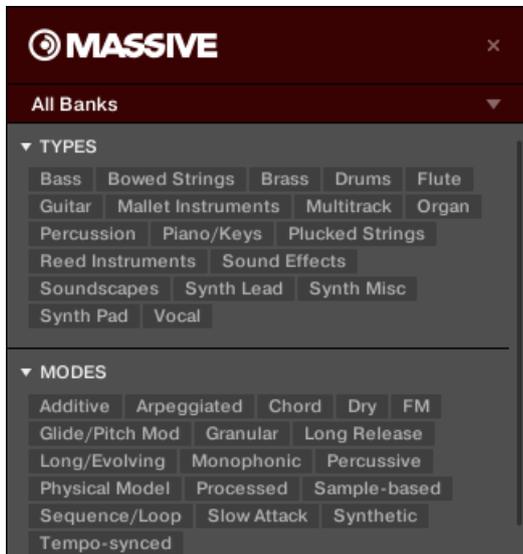

TYPES and MODES filters for MASSIVE

As soon the desired tags in the tag filters are selected the search is limited to the Preset files that are tagged correspondingly. Tags can also be deselected to broaden the search.

TYPES

The tags of the **TYPE** filter are structured into two hierarchical levels—top-level tags and sub-level tags.

- At first the **TYPES** filter displays the available top-level tags only.
- As soon as a tag in the top level selected, the second level appears underneath with sub-tags of the selected top-tag.
- The hierarchical structure means that the sets of sub-tags are specific to each tag of the level above.


MODES


The **MODES** filter provides an additional level that is independent of the Type levels:

- In general, Mode tags will rather refer to technical terms (e.g., [Arpeggiated](#), [Percussive](#), [Synthetic](#), etc.).
- The [MODES](#) filter is always displayed. You can start your search with the [MODES](#) filter before (or even without) using the [TYPES](#) filter.
- However, the list of tags available in the [MODES](#) filter will vary depending on the tags selected in the [TYPES](#) filter. If no file contains both the Type and Mode tags that you have selected, the Type tags will prevail and the Mode tags will be deselected.

If you don't select any tag in the [TYPES](#) or the [MODES](#) filter, the result list will include all available files for the selected Instrument.

Both the Types as well as the Modes filter menus can be collapsed and expanded with a click on the arrows to allow for a larger result list.

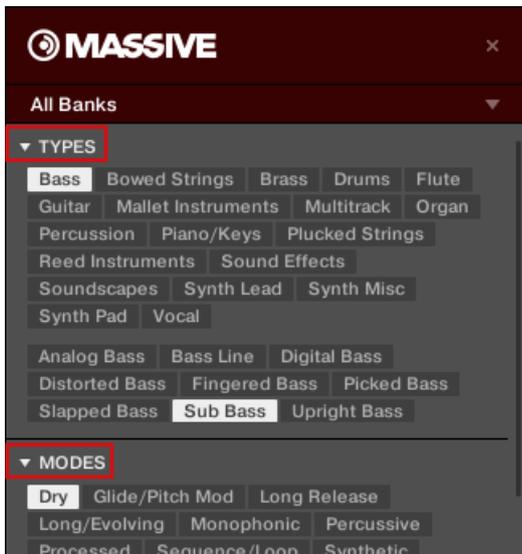

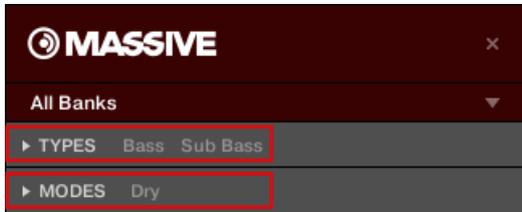

10.8.1 Filtering Preset Files by Types and Modes



The **MODES** tag filter is not available when browsing Effects.

In this tutorial you will learn how to filter find a bass line Preset file exemplary from the MON-ARK Instrument using the Types filter. We assume here you have already selected the **MON-ARK** Instrument in the Product selector. For now the **TYPES** filter shows only top-level tags:




The MONARK Instrument is selected in the Product selector.

In order to find a bass sound:

1. Select the **Bass** tag from the **TYPES** filter.

- ⇒ Upon your selection the second level of tags appears underneath with Sub-Types like [Analog Bass](#), [Fingered Bass](#), etc.

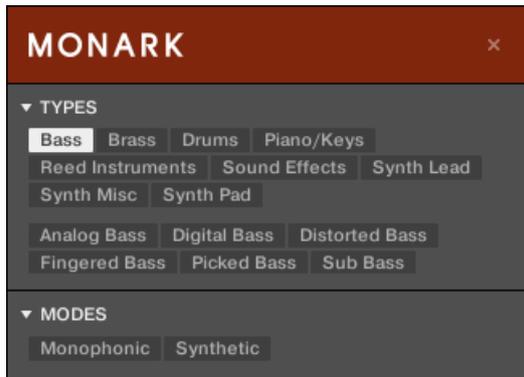

2. Select the Sub-Type matching the desired characteristic for your bass line. By selecting any of these tags, say, [Distorted Bass](#), you will narrow your search to this particular Sub-Type of bass sounds.



3. Select the [Synthetic](#) tag from the [MODES](#) filter.


→ The Results list is filtered accordingly to the Types and Modes filters.

This method allows you to quickly find various Preset files for an Instrument with similar characteristics.


Filtering Preset Files by Types and Modes Using the Keyboard

In order to find a bass sound:


1. Turn Knob 5 (All Types) to select the Bass tag from the Types filter.

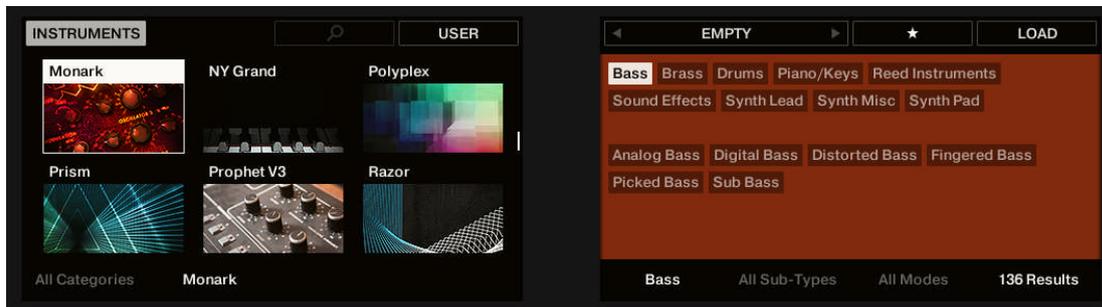

- ⇒ Upon your selection the second level of tags appears above Knob 6 displaying All Sub-Types.
2. Turn Knob 6 to select the Sub-Type matching the desired characteristic for your bass line, say, Distorted Bass.

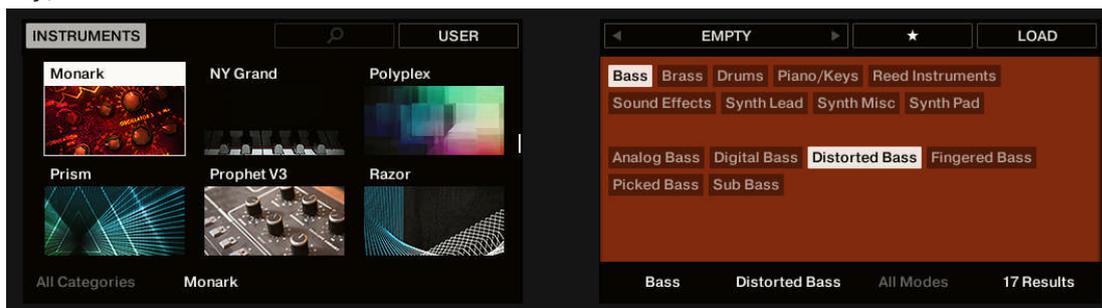

- The Results list is filtered accordingly to the Types and Modes filters.

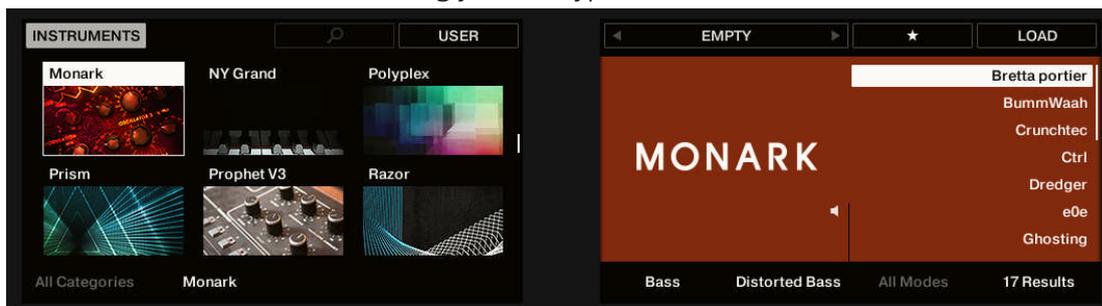

10.8.2 Selecting Multiple Tags from the Same Level



The **MODES** tag filter is not available when browsing Effects.

In both **TYPES** and **MODES** filter you can select **multiple tags** from the same level:

1. Hold [Shift] on your computer keyboard and click two tags at a particular level to select these tags and all tags in-between.
2. Hold [Ctrl] ([Cmd] on macOS) on your computer keyboard and click any number of tags at a particular level to select these particular tags.


→ The result list will include all files satisfying at least one of the selected tags.



Selecting multiple tags from the same level using the keyboard is not possible. Nevertheless, the display on the keyboard will show **(multi)** when multiple tags are selected in the software.

10.9 Working with Favorites

Favorites in the KOMPLETE KONTROL Browser allow you to quickly view and browse your most frequently used Preset files. Any Preset file can be assigned to be a Favorite. The Favorites serve as an additional filter in the Library pane. When activated, the Results list will only show Preset files that have been assigned to be a Favorite, and also match all other selected filters, including the search query entered into the search field.

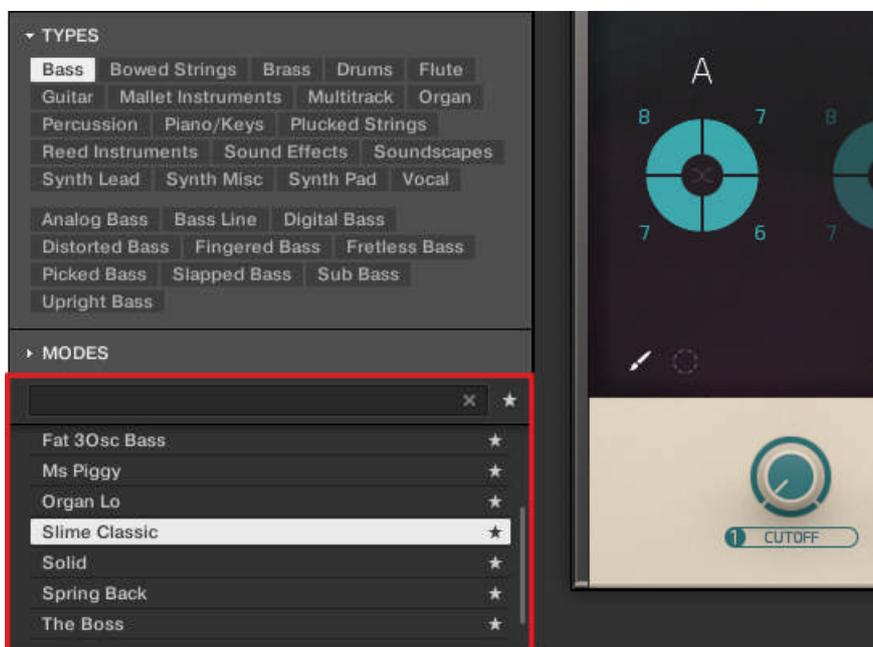


The COMPLETE KONTROL Browser showing all Favorites tagged with the Type Bass

10.9.1 Adding Preset Files to the Favorites


To add a Preset File to the Favorites:

1. Place the mouse cursor over any selected or unselected entry in the Results list.
⇒ The entry is highlighted and the Set Favorite icon on right appears.

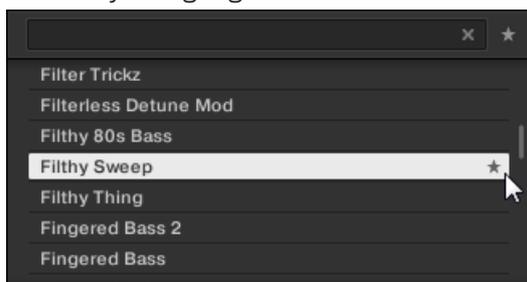

2. Click on the Set Favorite icon to add the corresponding Preset file to the Favorites.

→ The Preset file is added to the Favorites, indicated by the lit Set Favorite icon next to its name.

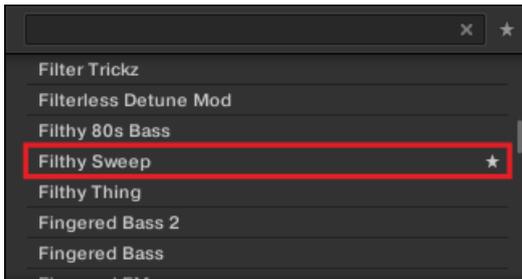


You can add any Preset File in the Results list to the Favorites, no matter if it is selected or not.

Adding Preset Files to the Favorites on the Keyboard


In order to add a Preset File to the Favorites on the keyboard:

1. Turn Knob 8 to select/highlight the Preset File you want to add to the Favorites in the Results list.

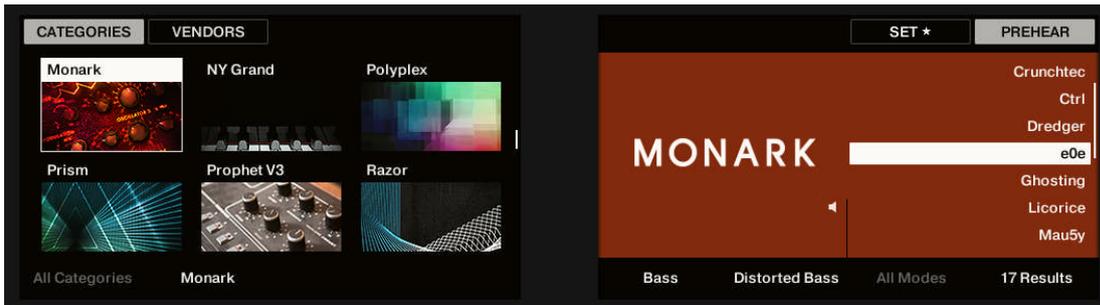

2. Press Button 7.


→ The Preset File is added to the Favorites, indicated by the lit Set Favorite icon next to its name.

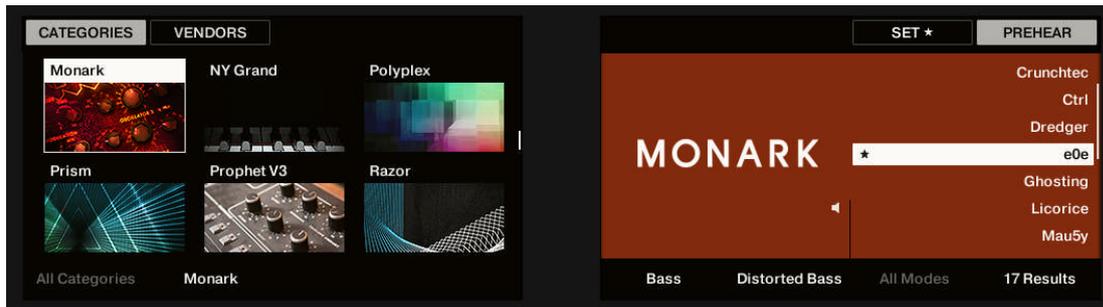

10.9.2 Displaying Favorites in the Results List

To activate the Favorites filter:

- ▶ Click on the Favorites icon next to the search field to activate the Favorites filter.

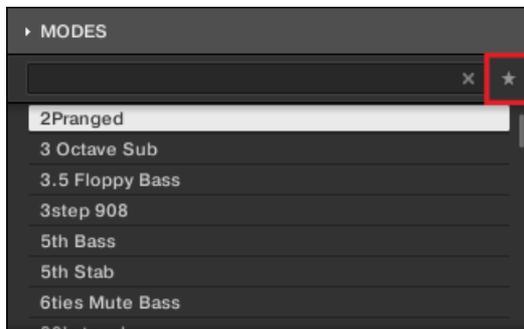

→ The Favorites icon is now lit and the Results list shows all favorite Preset Files.




Displaying all Favorites in the Results list on the Keyboard

In order to display all Favorites in the Results list on the keyboard:

▶ Press Button 4.


→ The Favorites icon is now highlighted in the display and the Results list shows all favorite Preset Files.

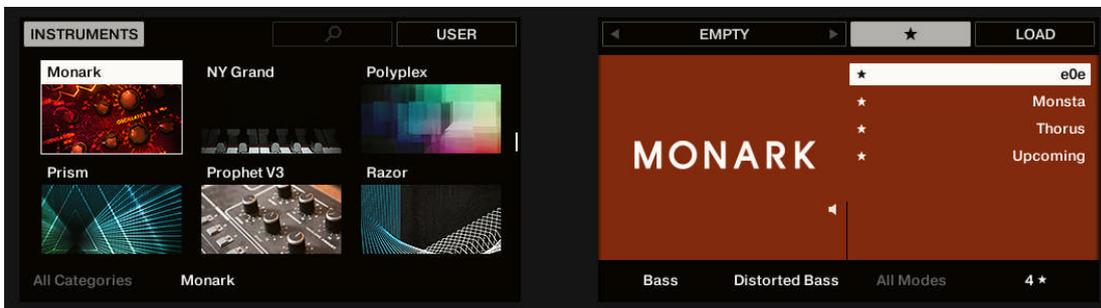


10.9.3 Removing Preset Files from the Favorites

To remove a Preset file from the Favorites:

- ▶ Click on the lit Set Favorite icon to remove the corresponding Preset file from the Favorites.

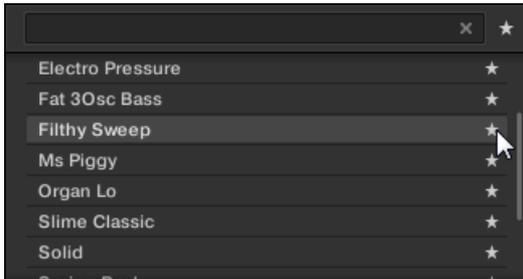

- The Preset file is removed from the Favorites, indicated by the hidden Set Favorite icon. The next time you select the Favorites filter, the Preset file will not be shown in the Results list.

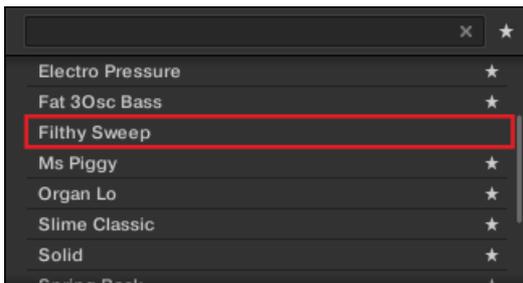

You can also remove a Preset file from the Favorites when the Results list is not filtered by Favorites.


Removing Preset Files from the Favorites on the Keyboard

In order to remove a Preset File from the Favorites on the keyboard:

- ▶ Press Button 7 to remove the corresponding Preset file from the Favorites.
- The Preset File has been removed from the Favorites, indicated by the hidden Set Favorite icon.

10.10 Performing a Text Search

In the search field you can enter your search query. The search considers all properties such as Preset file names, Instruments, Banks, Type and Mode tags, directly as you type.



The search field.

1. Click in the search field.
 2. Type the desired text to limit the Results to files containing this text.
- As you start typing, the list of matches will start narrowing in the result list below.

You can also limit the search by selecting Types and Mode tags.


In order to reset both text search tag search, use the **Reset button** (showing a little cross) on the right side of the search field. The Instrument selection is not affected.

10.11 Displaying Preset File Information

- ▶ Click the Information button (showing a little “i”) next to the **EDIT** button in the right part of the Control bar to display information on the file(s) selected in the result list.



- A box appears above with various information on the selected file(s): [File Format](#), [Date modified](#), [File Size](#), [Type](#), as well as the [Author](#) and [Manufacturer](#) properties, if any.

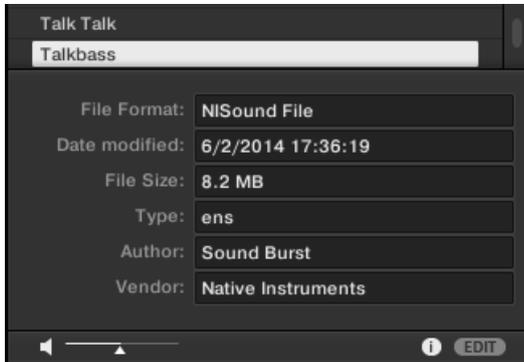

The Information box provides various information on the selected file(s).

If the selected files have different characteristics, the corresponding fields in the Information box will read **multi**.

10.12 Auditioning your Preset Files

When you are browsing Preset Files, you can audition Preset Files by using the Prehear feature at the bottom of the Browser. For this you need to enable the Prehear feature.



The Prehear controls.

1. Click the Prehear button (showing a little speaker icon) to enable/disable Prehear.
 - ⇒ When Prehear is enabled, you can directly hear Preset Files as you select them in the Result list of the **LIBRARY** pane or **FILES** pane.
2. Drag the Prehear Volume slider next to the Prehear button to adjust the volume of the Preset Files you are pre-listening to.
3. Click on any entry in the Results list.



In order to hear audio of the Prehear feature it is mandatory to configure the audio interface in the Preferences of KOMplete Kontrol.

Auditioning Your Preset Files using the Keyboard

You can also enable/disable the Prehear feature on the keyboard:

1. Press and hold **SHIFT**.
2. Press Button 8 (PREHEAR) to enable/disable the Prehear feature.
3. Release **SHIFT**.
4. Turn Knob 8 to select another Preset File in the Results list.

→ Upon selection this Preset file is played back and the previous Preset file stops playing instantly.

When you disable Prehear, the playback of any Preset file still being pre-listened is stopped.

11 Working with Effects

In this section you learn how to work with the Plug-in chain in terms of adding Effects, and organizing the Plug-in chain. Also, this section assumes you are familiar using the Browser and already loaded an Instrument.


For more information on using the Browser, refer to [↑10, Browsing the Library](#).

11.1 Opening the Plug-in Chain Panel

In order to work with the Plug-in chain in the KOMplete KONTROL software you need to make sure the Plug-in chain panel is displayed.

If this is not the case you can display the Plug-in chain panel by the following action:

- ▶ Click on the Plug-in chain panel button in the Header.



→ The Plug-in chain panel and the loaded Instrument are displayed. You can now add Effects to the Plug-in chain.




On the KOMPLETE KONTROL S-Series keyboard the Plug-in chain is displayed on the Plug-in page.

11.2 Adding Effects


Assuming an Instrument has already been loaded into the first Plug-in slot you can then add Effects to the Plug-in chain.

In order to add an Effect to the Plug-in chain:

1. Click on the empty Plug-in slot to select it.

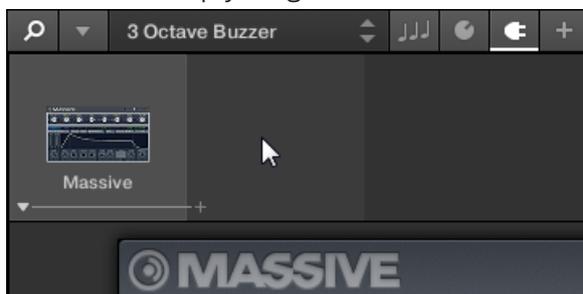

2. Browse for an Effect of your liking.

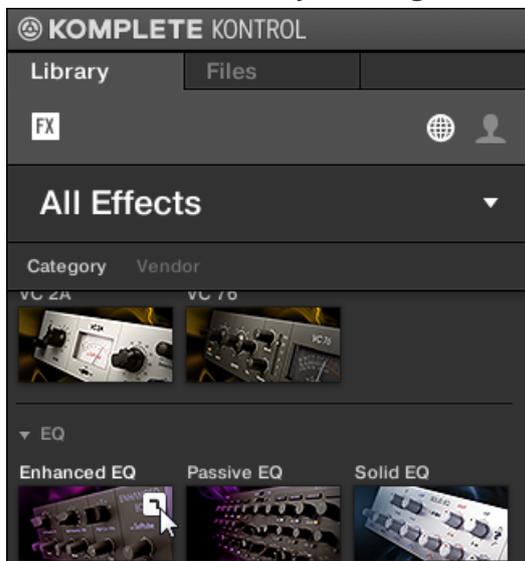


→ The Effect is loaded. Its image (or a generic icon for non-NKS Plug-ins) and name are shown in the second Plug-in slot. To add more Effects to the Plug-in chain, repeat the aforementioned steps.



Adding Effects using the Keyboard


In order to add an Effect to the Plug-in chain using the keyboard:

1. Press the **PLUG-IN** button to show the Plug-in page.
2. Press Button 6 until you select the empty Plug-in slot.

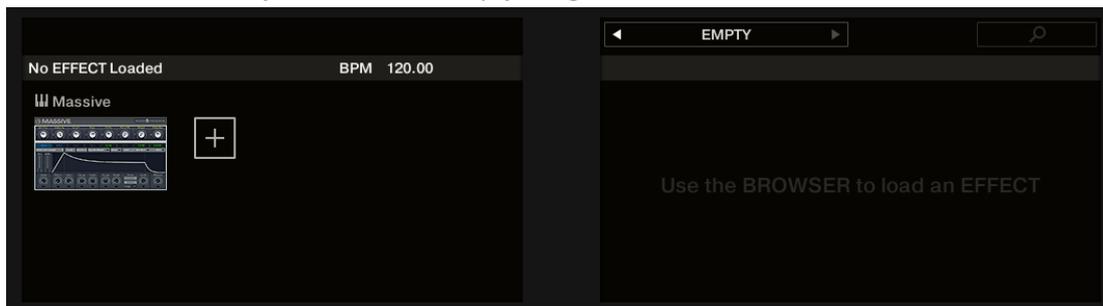


3. Press the **BROWSE** button to open the Browser.

⇒ The label below Button 1 shows the current Product Type EFFECTS.

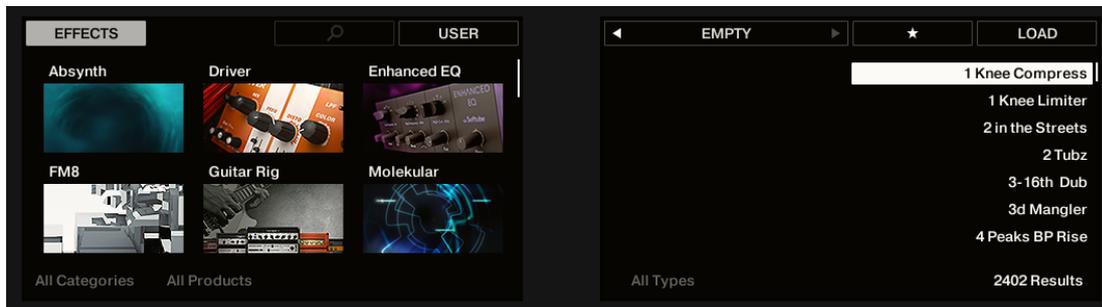

4. Select an Effect together with a Preset file.
5. Press Button 8 or the 4-D encoder to load the selection.

→ The Effect is added to the second Plug-in slot in the Plug-in chain. To add more Effects to the Plug-in chain, repeat the aforementioned steps.

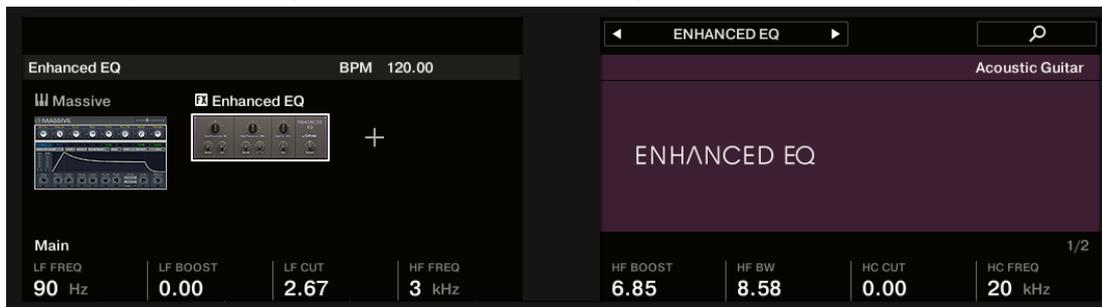

11.3 Selecting Plug-in Slots

When you have several Effects added to the Plug-in chain you can directly jump to a Plug-in slot in order to adjust the included Effect.


In order to jump to another Plug-in slot and display the Effect's controls:

- ▶ Click on the Plug-in slot you want to select.

Selecting another Plug-in Slot using the Keyboard

In order to select another Plug-in slot in the Plug-in chain using the keyboard:

1. Press **PLUG-IN** to show the Plug-in page.
 2. Press Button 5 or Button 6 to select the previous or next Plug-in slot in the Plug-in chain.
- The Plug-in controls are mapped to the encoders accordingly.

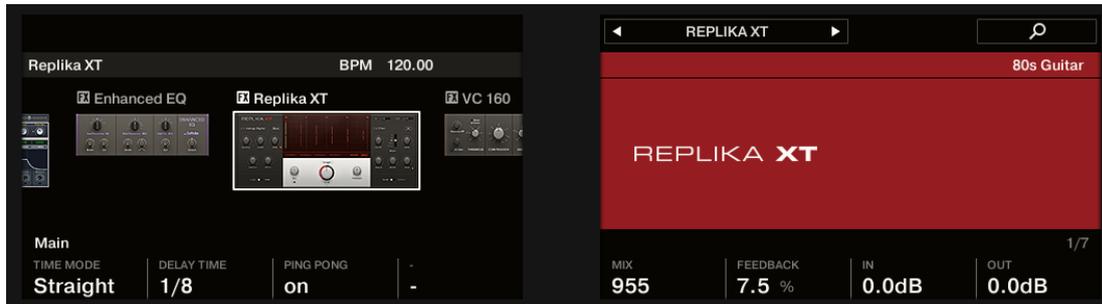

You can also select another Plug-in Slot using Button 5 and 6 directly in the BROWSER.

11.4 Reordering Effects

If you want to reorder your Effects in the Plug-in chain you can easily move them by drag and drop.

In order to move an Effect in the Plug-in chain:


1. Hover the mouse over the Plug-in slot you want to move.
2. Click and hold the left mouse button and move the mouse pointer to the desired position in the Plug-in chain.

- ⇒ The white line between the borders of the Plug-in slots is the current position for dropping the Plug-in slot.



3. Drop the Effect into a new position in the effects chain.

- The Plug-in slot now sits at another position in the Plug-in chain and the other Plug-in slots have moved accordingly.

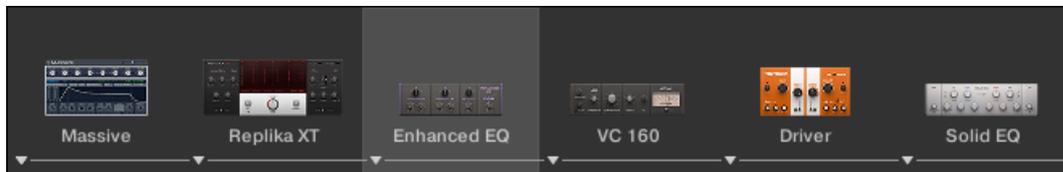

Reordering Effects on the Keyboard

In order move an Effect in the Plug-in chain:

1. Press the **PLUG-IN** button.
2. Press Button 5 or Button 6 to select the Plug-in slot with the Effect you want to move.
3. Press and hold **SHIFT** in order to access additional controls.
4. While holding **SHIFT** press Button 5 or Button 6 to move the selected Effect in the Plug-in chain.

11.5 Scrolling the Plug-in Chain

Theoretically, it is possible to add an unlimited amount of Effects to the Plug-in chain. If the Plug-in chain exceeds the space on the GUI due to numerous Effects loaded, big scroll arrows appear on the left and/or on the right border.



Right scroll arrow

In order to scroll through the Plug-in chain:


- ▶ Click the scroll arrow for the respective direction.

11.6 Bypassing Effects


If you temporarily want to listen to the Instrument without a specific Effect for an A/B comparison but do not want to delete them from the Plug-in chain, you can bypass Effects.

In order to bypass an Effect:

1. Hover the mouse over the Plug-in slot containing the Effect you want to bypass.
 - ⇒ Additional controls are displayed.
2. Click the Bypass button at the top left of the Plug-in slot.

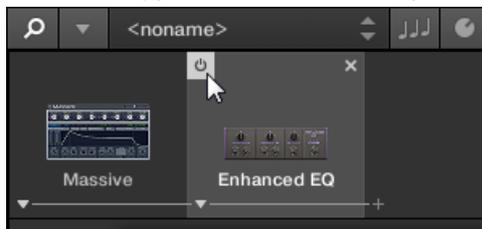

→ The Effect is now bypassed and the image is grayed out.

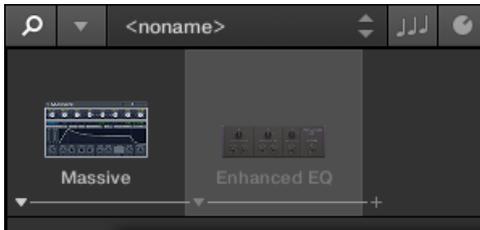

Bypassing Effects using the Keyboard

1. Press the **PLUG-IN** button to show the Plug-in page.
2. Select the Plug-in slot containing the Effect you want to bypass in the Plug-in chain.
3. Press and hold **SHIFT** in order to access additional controls.




4. While holding **SHIFT** press Button 7 (BYPASS).
5. The Effect is now bypassed and its name is grayed out.



11.7 Removing Effects

In order to remove an Effect from the Plug-in chain:

1. Hover the mouse over the Plug-in slot containing the Effect you want to remove.
⇒ Additional controls are displayed.
2. Click the Remove button at the top right of the Plug-in slot.

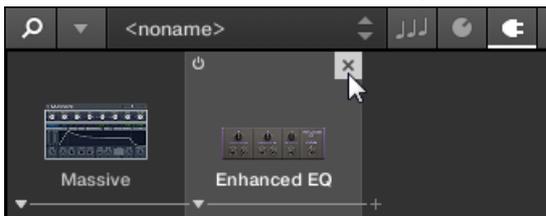


→ The Effect is now removed from the Plug-in chain.

Removing Effects from the Plug-in Chain using the Keyboard


In order to remove an Effect from the Plug-in chain:

1. Press **PLUG-IN** to show the Plug-in page.
2. Press and hold **SHIFT** in order to access additional controls.

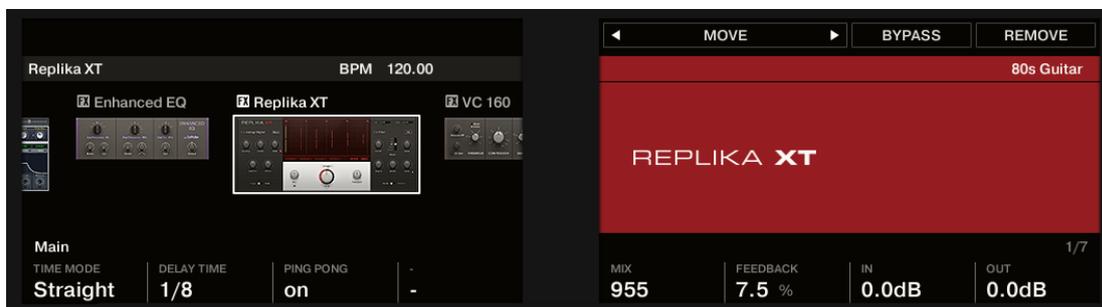

3. While holding **SHIFT** Press Button 8 (REMOVE).

4. The Effect is removed from the Plug-in chain.

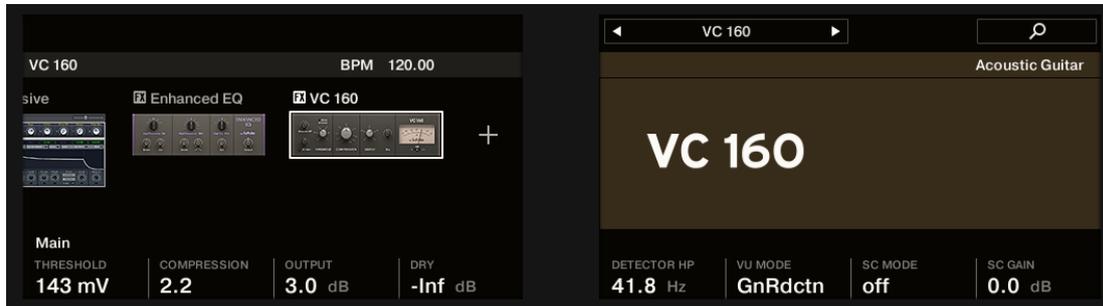

12 Managing the Library

With the Browser you can also organize your own Preset files. In this section you will learn how you save and manage your own Preset files in the User Library and how to import COMPLETE KONTROL-compatible user files.

The workflows for organizing Instrument Preset files and the workflows for organizing Effect Preset files are identical. The Product Type Instrument or Effect cannot be selected in the Browser directly as this is determined by the Plug-in chain. For more information on Product Types and on switching between Product Types, refer to [↑10.1.1, Product Types: Instrument and Effect](#).

For detailed overview of the Browser elements, refer to [↑5.2, Browser](#).

12.1 Saving Preset Files to the User Library

KOMLETE KONTROL allows you to conveniently save any sound you created with your Instruments and Effects in a new user Preset file. Your saved Preset files are automatically added to the user content section of the Library pane and can be filtered and searched like any other Preset file in the COMPLETE KONTROL Library. On your hard drive, the user Preset files are saved in the following folder (sorted by Instrument, in corresponding subfolders):

- **Windows:** *C:\Users\<<your user name>\Documents\Native Instruments\User Content*
- **macOS:** *Macintosh HD/Users/<your user name>/Documents/Native Instruments/User Content/*

The Preset files saved for KOMLETE Instruments with KOMLETE KONTROL are compatible with the stand-alone and plug-in versions. This way you can, for example, open a KONTAKT file you saved with KOMLETE KONTROL in the KONTAKT stand-alone application or the plug-in by opening the file from the user content folder described above.




The Preset files you save in KOMLETE KONTROL are compatible with MASCHINE. To add them to the user content section of MASCHINE's Library pane, click on [Rescan](#) in the [User](#) pane of the [Library](#) page in the MASCHINE Preferences.


Saving a Preset File

Follow the instructions to save a sound in a new Preset file:


1. Select the Instrument or Effect Plug-in slot for which you wish to save a Preset file.
2. In the *File* submenu of the KOMLETE KONTROL menu, click on *Save* :

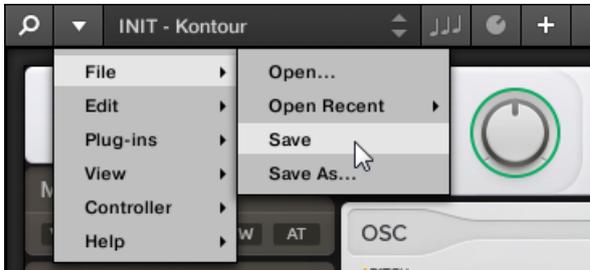

Or, if you want to save a Preset file you are working on with a new name, click on *Save As...* in the *File* submenu of the KOMLETE KONTROL menu:

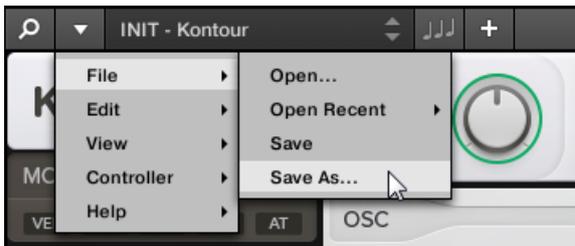

3. Enter a name for your new Preset file and click [Save](#) in the [Save Preset](#) dialog to save the Preset file.

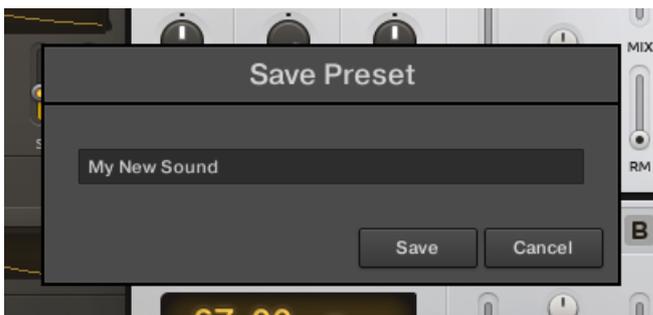

→ Your new Preset file immediately appears in the user content section of the [Library](#) pane.



12.2 Deleting User Preset Files from the User Library

You can delete user Preset files directly from the Results list:

1. Right-click the desired Preset file and select *Delete* from the context menu. If you want to delete several user Preset files at once, first select them as described above, and right-click any of them.
- ⇒ A warning dialog opens to inform you that the Preset file will be not only removed from the KOMPLETE KONTROL Library but also deleted from your hard disk.
2. Click **OK** to confirm the deletion (or **Cancel** to keep the file).
- The Preset file is deleted from the KOMPLETE KONTROL Library and from your hard disk.



When browsing factory content, the *Delete* entry is not available in the context menu.

12.3 Editing the Tags and Properties of User Preset Files

When you save user Preset files in KOMPLETE KONTROL, they are automatically assigned to Instruments and Banks depending on the Instrument you are using. To further define the attributes of your user Preset files, you can edit the Type and Mode tags as well as the general properties of the file. This allows you to organize your user content in a meaningful way and search for your files by using the Type and Mode filters in the [Library](#) pane.




The Type and Mode tags are also recognized by the MASCHINE Browser. This way, you can easily find the user Preset files you saved with KOMPLETE KONTROL in the User content section of MASCHINE's [Library](#) pane.



The [MODES](#) tag filter is not available when browsing Effects.

Follow the instructions below to assign tags to your Preset file and change its properties:


1. Select the Preset file in the Results list and click [EDIT](#) in the Control bar to open the Attribute Editor.

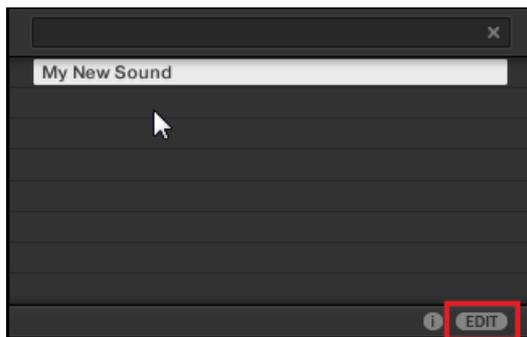


- Click on **TYPES** to edit the Type tags for your Preset file:




- Click and drag the upper edge of the Attribute Editor upwards to increase its size. This makes it easier to navigate in the list of available tags.

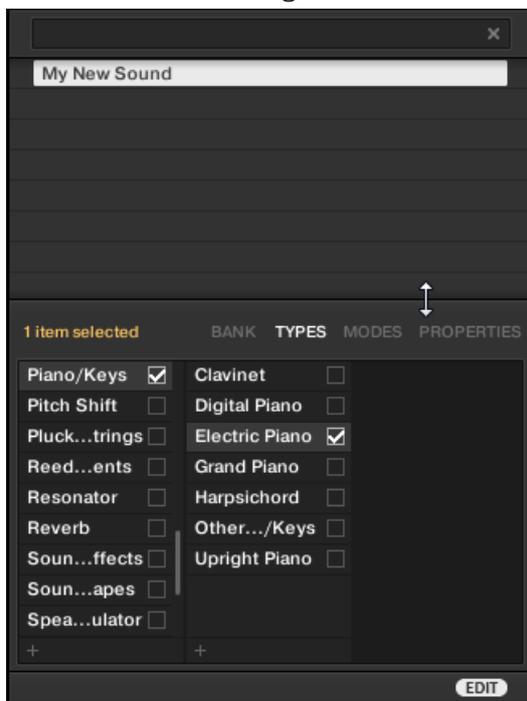


- Assign the appropriate tags to your Preset file by clicking the checkboxes next to their names.

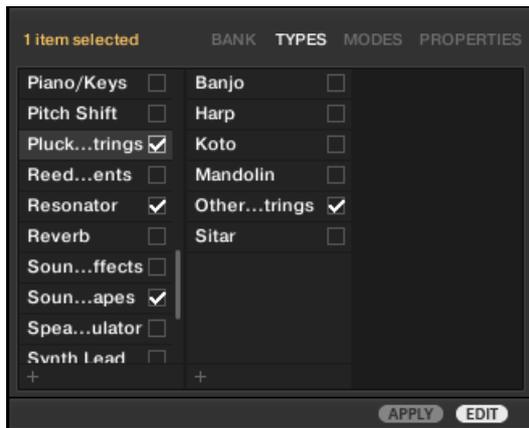

- Click on **MODES** to edit the Mode tags for your Preset file. You can assign them in the same way you assigned the Type tags before, by clicking on the checkboxes next to their names.

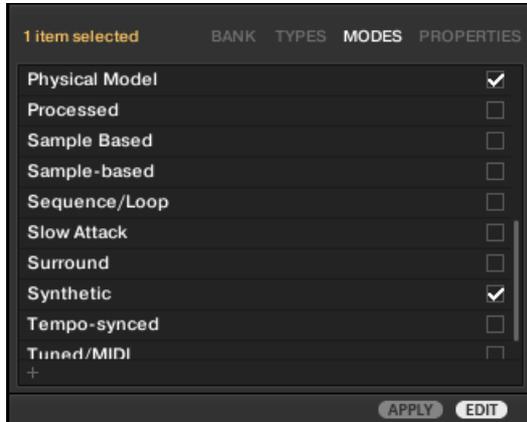


- Click on **PROPERTIES** to edit additional information included in your Preset file. You can enter your name in the **Author** field, or, in case you intend to share the Preset file, leave a note in the **Comment** field for other users to read.

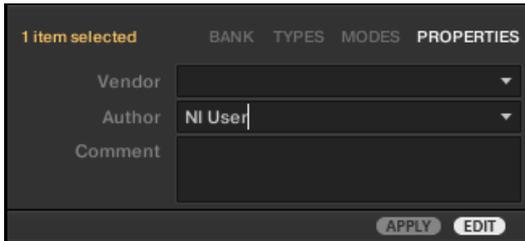

The screenshot shows a dark-themed interface with a tabbed menu at the top containing 'BANK', 'TYPES', 'MODES', and 'PROPERTIES'. The 'PROPERTIES' tab is active. Below the tabs, there are three input fields: 'Vendor' (a dropdown menu), 'Author' (a dropdown menu containing the text 'NI User'), and 'Comment' (a text area). At the bottom of the panel, there are two buttons: 'APPLY' and 'EDIT'.

- To apply any changes made in the Attribute Editor, click on **APPLY**.

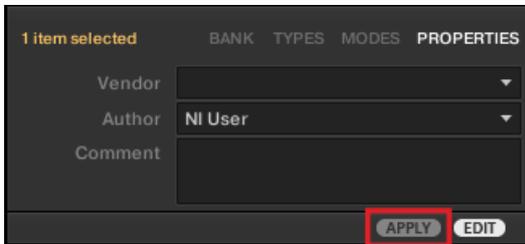

This screenshot is identical to the previous one, but the 'APPLY' button at the bottom of the panel is highlighted with a red rectangular box.


→ Your Preset file is now tagged according to your selection of Types and Modes and the properties are saved. You can close the Attribute Editor by clicking on **EDIT** again.

12.4 Working with the Files Pane

This section details the actions you can perform that help you to browse for files on your hard disks using the **Files** pane. The Results list of the **Files** pane shows the files and folders found in the path selected in the Location bar above.




Only KOMLETE KONTROL-compatible files are shown in the Results list.

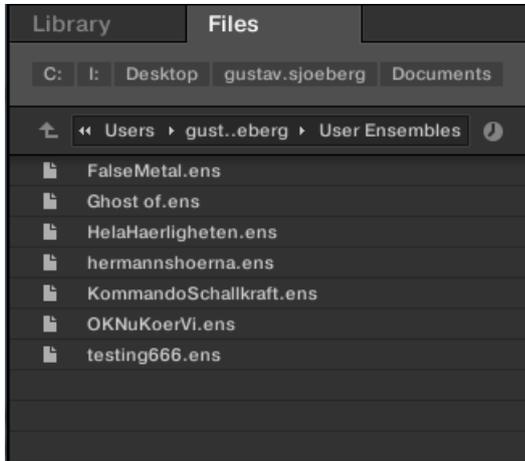

The Results list of the Files pane.

12.4.1 Additional Results List Features List in the Files Pane

In the Files pane the Results list offers a context menu with additional commands. You can open it with a right-click on the selected entry or entries, respectively.

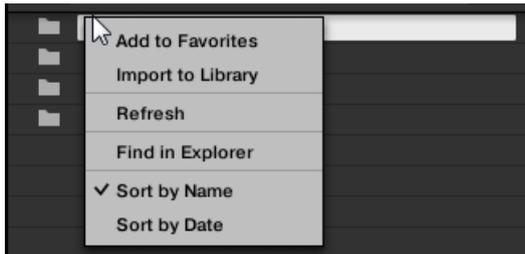

The context menu in the result list of the Files pane.


Following commands are available:

Command	Description
<i>Add to Favorites</i> (folders only)	Adds the selected folder to your Favorites.
<i>Import to Library</i> (folders only)	Imports the selected folder(s) into the Library.

Command	Description
<i>Refresh</i>	Refreshes the display of the list, in case items have been modified in that folder.
<i>Find in Explorer / Find in Finder</i>	Opens an Explorer/Finder window pointing to the selected folder.
<i>Sort by Name</i>	Sorts the Result list according to the item names.
<i>Sort by Date</i>	Sorts the Result list according to the item dates.

12.4.2 Navigating to File Locations with the Location Bar

The Location bar shows and lets you modify the selected path. At any time the Results list will display the content of the path shown here.

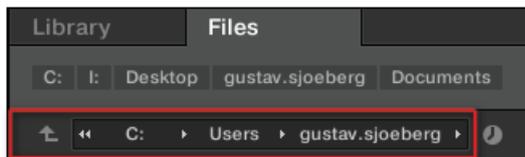

The Location bar

The Location bar provides following tools:


- **Up arrow:** Use the Up arrow on the left to go one level up in your file system.
- **Selected path:** Within the path displayed, you can:
 - Click any **folder name** to jump to that folder.



- Click any **right-pointing arrow** after a folder name to open a list of its subfolders, and select any entry in the list to jump to that folder.




- If all the levels cannot be displayed in the path, click the **double left-pointing arrow** left of the path to display the remaining upper levels (up to the Workspace, representing the highest level in your file system), and select any entry in the list to jump to that location.



12.4.3 Navigating to Recent File Locations

The Recent Locations button shows a clock icon at the right of the Location bar:

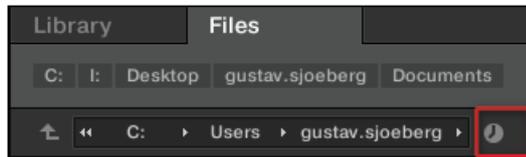


The Recent Location button.

The last 10 locations you have visited are stored by KOMPLETE KONTROL and available here:

- ▶ Click the Recent Location button and select any recently visited location from the list.
- This location is loaded in the Location bar and its content displayed in the result list.

12.4.4 Working with File Location Favorites

Located at the top of the [Files](#) pane, the favorite bar displays all your favorites folders. **Favorite folders** are shortcuts to specific locations in your file system.

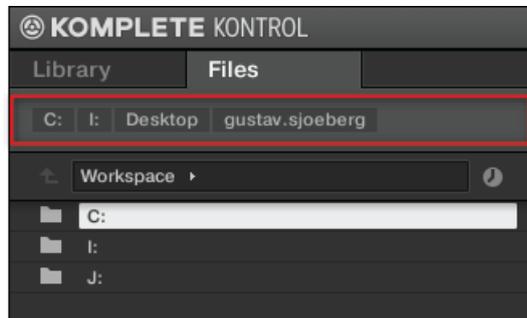

The Favorite bar, at the top of the **Files** pane.

Favorite folders can be useful if you often return to the same location while browsing your file system in the **Files** pane. The default favorite folders are the roots of each of your hard disks, your desktop folder, and your user folder.

Jumping to Favorite Folders


- ▶ Click any favorite folder in the Favorite bar to jump to that location.
- The selected location is loaded in the Location bar and its content appears in the Results list.

Adding and Removing Favorite Folders

You can add your own favorite folders to the Favorites bar. This is done in the Results list:

1. Navigate to the parent folder containing the folder you want to use as a favorite so that this folder appears in the Results list.

- In the Results list, right-click the desired folder and select *Add to Favorites* from the context menu.



You can also remove any Favorite from the Favorite bar:

- ▶ To remove a favorite folder, right-click it in the Favorite bar and select *Remove from Favorites*.

12.5 Loading VST Plug-ins

KOMPLETE Instruments and VST plug-ins supporting the Native Kontrol Standard (NKS) are automatically loaded when you call up a Preset file from the KOMPLETE KONTROL Library.

However, you can also load plug-ins directly, allowing you to integrate any VST plug-in in KOMPLETE KONTROL. This way you can play your VST plug-ins using the Smart Play features, map their parameters to the controls on the keyboard, and save Preset files for them in your KOMPLETE KONTROL User Library.

To load a VST plug-in in KOMPLETE KONTROL:

- ▶ Select the plug-in you want to load in the *Plug-ins* submenu of the KOMPLETE KONTROL menu.



If your VST plug-ins do not show up in the *Plug-ins* submenu, check if the VST plug-in folders on your hard drive are correctly added to the *Locations* pane on the Preferences' *Plug-ins* page.

12.6 Installing NKS Instruments

Native Kontrol Standard (NKS) is a software instrument format that allows third-party developers to integrate with KOMPLETE KONTROL and MASCHINE hardware and software at the same deep level as KOMPLETE Instruments.

The Native Kontrol Standard includes:

- Seamless integration into the KOMPLETE KONTROL Browser for a unified browsing experience.
- Full parameter mapping for instant hands-on control.
- Support of KOMPLETE KONTROL S-Series features such as the Light Guide.

NKS Instruments can be found in the KOMPLETE KONTROL Browser next to your KOMPLETE Instruments. All of their Preset files are fully tagged, so filtering in the Browser gives you matching results from both KOMPLETE Instruments and NKS Instruments. And when you load a Preset file from an NKS Instrument, its parameters are automatically mapped to the controls on the keyboard.

Installing VST Plug-ins with NKS Support


VST plug-ins with NKS support are automatically added to your Library when you start KOMPLETE KONTROL for the first time after completing their installation. The folders containing the Preset files for NKS support can be managed in the Factory pane on the Library page of the Preferences. For more information, refer to [↑7.5.4, Preferences – Library Page](#).

Installing KONTAKT and REAKTOR Instruments with NKS Support


Third-party developers of KONTAKT and REAKTOR Instruments provide you with a folder that contains all Instrument files, including Preset files and samples. Instead of running an installer, this folder needs to be stored on the hard drive. The Instrument can then be activated with Native Access, which also adds it to the KOMPLETE KONTROL Library. If you are using KONTAKT or REAKTOR, the Instrument is automatically added to their respective Browser, too.

To activate your KONTAKT Instrument with NKS support and add it to the KOMPLETE KONTROL Library, follow the steps below:

1. Start the stand-alone version of the KOMPLETE KONTROL software.
2. Open the *File* sub-menu in the KOMPLETE KONTROL menu and click on *Manage Products...*

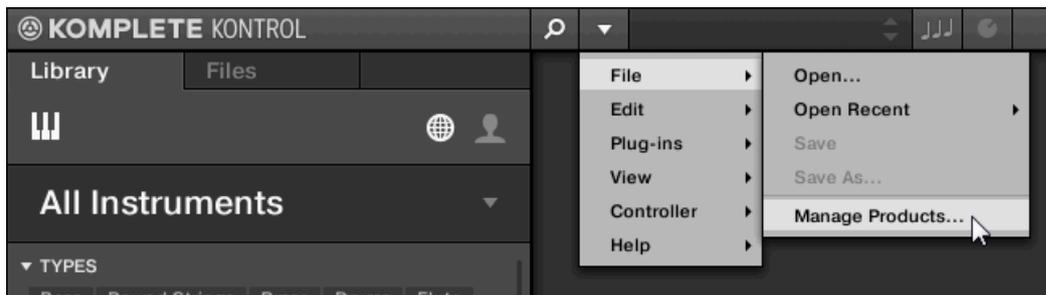

- Click on [Add a serial](#) in the top-left corner of Native Access.

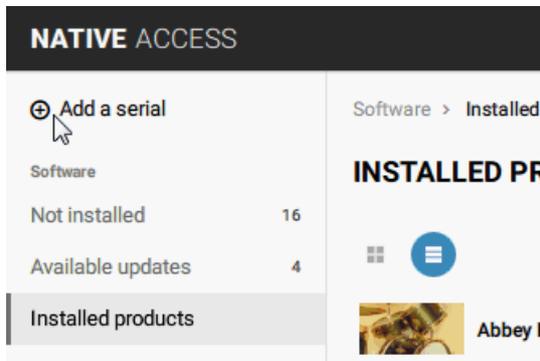


- Enter the serial number of the Instrument and click [ADD SERIAL](#).




- Click [BROWSE](#) and open the folder containing the Instrument files in the file dialog.

6. Click on **INSTALL** to add the Instrument to your KOMPLETE KONTROL Library.

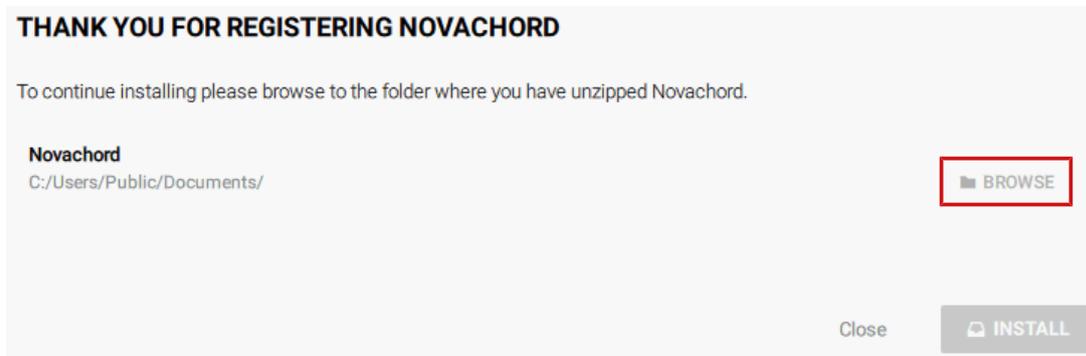

- The Instrument is installed. KOMPLETE KONTROL automatically scans for the new content and adds it to the KOMPLETE KONTROL Browser.

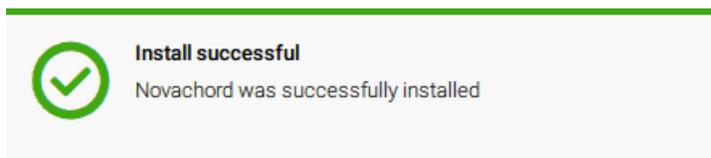

The KOMPLETE KONTROL Library and the KONTAKT Browser reference the Instrument files contained in the folder. It is recommended to not delete or move the folder afterwards, otherwise KOMPLETE KONTROL and KONTAKT will not be able to find the Instrument files. If an Instrument cannot be found, use the [Rescan](#) function on the Preferences' Library page to update the Library with the correct folder location.

12.7 Importing KOMPLETE KONTROL-Compatible User Files

Apart from the huge KOMPLETE factory library, you might want to use, e.g., your own REAKTOR ensembles or KONTAKT Instrument files you received from other users.

You can load them directly from the [Files](#) pane, but you won't be able to find and load them from the keyboard's on-screen Browser nor from the [Library](#) pane.

For this you will have to import the files into the Library first. Importing files does not mean they will be moved from the directory they currently reside in, they will only be referenced by the Browser. That's why whenever you move files, make sure to update the paths to their respective directories in the [Library](#) page of the [Preferences](#) panel.

The [Files](#) pane allows you to import whole folders. All KOMPLETE KONTROL-compatible files found in the selected folder(s) will be imported.

Procedure

To import a folder, do the following:

1. In the [Files](#) pane, navigate to the folder containing the files you want to import.
 2. Select the desired folder.
 3. Click the [IMPORT](#) button at the bottom right of the Browser.
⇒ You will be presented with the Attribute Editor.
 4. In the Attribute Editor, tag the files you are about to import to the Library.
 5. Click [OK](#) at the bottom right of the Browser to import the files to the Library.
- All KOMPLETE KONTROL-compatible files found in the selected folder(s) are imported to your Library. They are added as user content. Furthermore, the paths of the imported folders are added to the list of user libraries in the [User](#) pane of the [Library](#) page in the [Preferences](#) panel.



You can also apply/remove tags at any time after they are imported. However, it may be best to tag files upon import, since it will make it easier to find them later.

13 Controlling Instrument and Effect Parameters

This section introduces you to controlling Instrument and Effect parameters using the KOM-LETE KONTROL keyboard and explains how to customize parameter mappings.

13.1 About Pre-Mapped Instruments

All KOM-LETE and NKS Instruments and Effects are pre-mapped, which means that the keyboard's knobs and Touch Strips are automatically assigned to key parameters as soon as you load an Instrument in KOM-LETE KONTROL. You do not have to manually configure a mapping or assign knobs via MIDI learn.



You can customize the parameter mapping for each Preset file in the Plug-in Panel of the KOM-LETE KONTROL software. For more information, refer to [↑13.4, Customizing Parameter Mappings using the Plug-in Panel](#).

13.2 Adjusting Parameters

Once you have loaded an Instrument, the eight knobs on the keyboard are automatically assigned to eight Instrument parameters. Whenever you turn a knob on the KOM-LETE KONTROL keyboard, the mapped parameter visually reflects the movement in the KOM-LETE KONTROL software.

- ▶ To adjust an Instrument parameter, turn the corresponding knob on the keyboard. The mapping of each knob is indicated by the displays.

13.3 Switching Parameter Pages

Many Instruments are equipped with much more than eight parameters. To provide quick access to additional parameters, the Page buttons (left and right arrows) to the left of the Control section let you skip through parameter pages. This remaps the knobs to a different set of Instrument parameters.

- ▶ To skip to another parameter page and remap the eight knobs to a new set of controls, press the Page buttons left or right.
- The number at the bottom right of the right display indicates the current parameter page and the total number of available pages for the loaded Instrument.

13.4 Customizing Parameter Mappings using the Plug-in Panel

If you want to customize the parameter mapping for an Instrument's Preset file, you have to enable the Edit mode of the Plug-in panel.

- ▶ To enable or disable the Plug-in panel's Edit mode, click on the Edit mode button in the upper right corner.



The Edit mode allows you to:


- Add, delete, and replace parameters in the mapping.
- Learn parameters to controls.
- Rename controls.

- Add pages to the Control section, or delete existing pages.
- Add and rename sections on the pages to group controls.



In order to make your changes permanent, you have to save the Preset file to the KOMPLETE KONTROL User Library. For more information, refer to [↑12.1, Saving Preset Files to the User Library](#).

Plug-in Panel Edit Mode

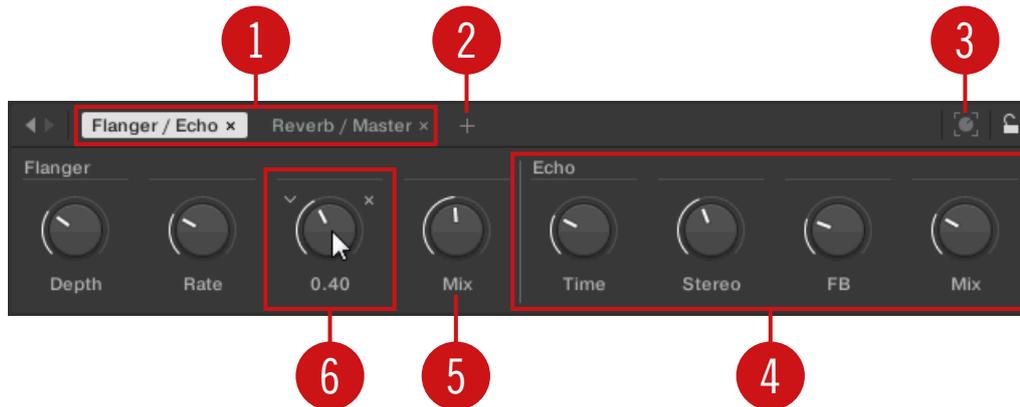

The Edit mode of the Plug-in panel

Each page (1) of the Control section on the KOMPLETE KONTROL keyboard shows up as a label at the top of the Plug-in panel.

1. Click on a label to view and edit the controls on this page. The current page is highlighted.
2. To delete a page, click on the cross icon next to its label.

The Add Page button (2) allows you to add more pages to the Control section for the current Preset file, while the Learn button (3) enables Learn mode for the Plug-in panel.

- ▶ In Learn mode, select a control in the Plug-in panel and move any parameter on the Instrument's panel to learn this parameter to the selected control (highlighted in blue).

Controls can be grouped to sections (4) to show related parameters in a coherent manner.

1. Double-click on the empty space above a parameter, enter a name, and then press [enter] or click elsewhere to create a new section starting with the chosen parameter.
2. To rename an existing section, double-click on it and enter a new name. Press [enter] or click elsewhere to confirm the changes.

The name of each control is shown below the corresponding knob in the Plug-in panel **(5)**.

- ▶ To change the name of a control, double-click on it and enter a new name. Press [enter] or click elsewhere to confirm the changes.

If you place the mouse over a control **(6)** in Edit mode, additional options allow for changing the parameter mapping of this control.

1. Click on the arrow icon at the left of the control's knob and select a parameter from the drop-down menu to map it to this control.
2. Click on the cross icon at the right of the control's knob to delete this control from the current page.

14 Playing and Editing Scales and Chords

KOMPLETE KONTROL's Scale engine comes equipped with a vast amount of scales that you can select and use to play your Instruments. This opens up possibilities to play an Instrument such as a piano according to, e.g., the minor pentatonic scale without hitting a "false" note. In Chord mode you can use the provided scales to combine individual note harmonies into chords. Combined with the Arpeggiator, you can even play scales automatically simply by pressing down a key on the KOMPLETE KONTROL keyboard or receiving an incoming MIDI note.

When you select a scale in the Perform panel and switch the Scale engine on, the scale gets mapped onto the keyboard and is reflected by the Light Guide. This means that regardless of what keys you actually press down on the keyboard—or what MIDI notes you send from the host—the notes that are being played back are always mapped onto the closest notes contained in the scale that you selected.

14.1 A Note about Music Theory

KOMPLETE KONTROL has built-in scales and harmonies that you can select to play your Instruments with chords and arpeggiator sequences. To learn more about what that really means, continue reading below.

Scales

Traditionally music is built by combining elements of rhythm and harmony. There are many exceptions to this, but to understand the concepts of scales, chords and arpeggiator sequences let's start from there.

All notes and keys correspond to a pitch—or tone frequency. On a keyboard, each key typically represents a semitone, meaning that it is a "half step" higher or lower in pitch than the next key (though other tunings exist as well). To play melodies or chords that sound good together, notes are usually grouped together in scales. In the Western music tradition, a scale typically covers seven white keys and five black keys on a keyboard or piano: an octave. It is called so because the eighth key that follows the seventh contiguous white key plays the same note as the first of the seven. That key is called the root note. A scale then, is a certain combination of

white and black keys (each representing a semitone) within an octave. By playing only the keys belonging to some scale, you are certain to stay “in key” within that scale. Important to note though, is that scales are not made up by absolute note values, but rather consist of relative changes in pitch—or steps along the scale. For example, the major scale consists of “whole step–whole step–half step–whole step–whole step–whole step–half step,” which means that you can transpose the scale up and down a keyboard; choose any root note you want and play the scale from there.

Chords

Polyphonic Instruments let you play multiple notes simultaneously—in other words chords. As an example, let’s see how to build up a chord by selecting individual notes from a scale and playing them simultaneously. In this case, we’ll use the C major scale. As we saw above, the major scale starts with two whole steps, followed by a half step, and then three more whole steps until it ends with another half step. We can use this knowledge to play a C major chord by pressing the root note C, then pressing another key two whole steps above C (the E note) and then yet another key a half step and a whole step further up the keyboard (the G note) all simultaneously. This C major chord corresponds to a root note (C), a third (E) and a fifth (G), which is the note interval of a major triad. By playing a triad chord you have just learned the concept of musical harmony, where notes are stacked together into chords and played simultaneously.


Arpeggiator Sequences

In above section you read about the combination of notes and playing them together as chords. You can also play them like diachronic note sequences, quite like playing the harp—or *arpeggiator sequence*. If chords have to do with adding harmony to a note, then arpeggiator sequences add time and rhythm. Instead of playing a chord consisting of three notes simultaneously, you can play the same three notes as a sequence in a given order (e.g. top-down) and at a certain rate (e.g. 1/16 notes). This is also a way for monophonic Instruments to play “chords.”


14.2 Activating the Scale Engine

In order to activate the Scale engine:


1. Click the Perform panel button in the Header to show the Perform panel.



- ⇒ The Perform panel appears.

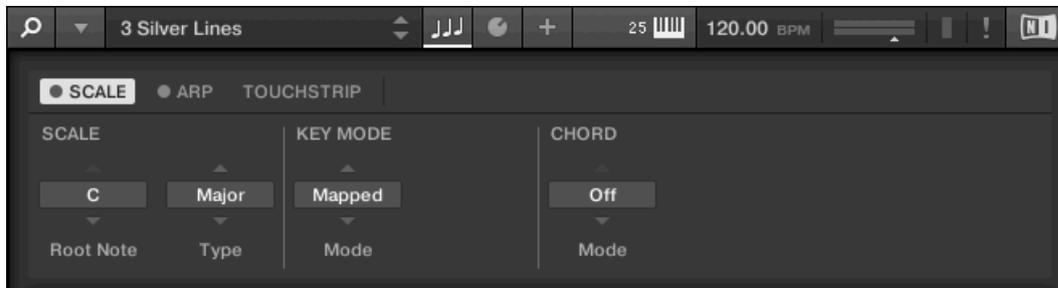

2. To switch on the Scale engine, click the check box next to **SCALE** in the Perform section so it is filled blue.

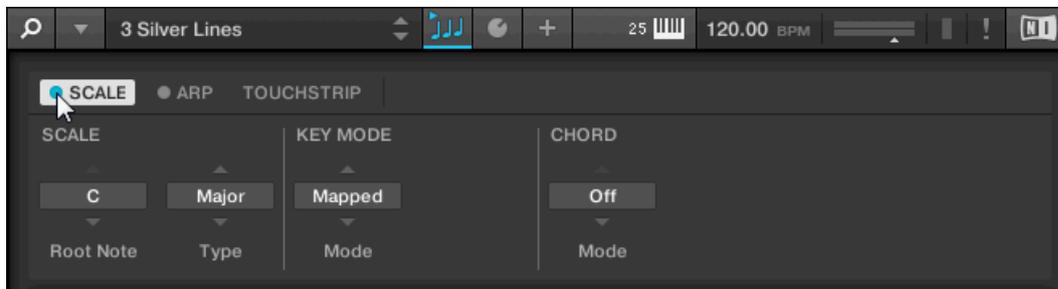

Activating the Scale Engine on the Keyboard

- ▶ To switch on the Scale engine, press **SCALE (Edit)** in the Perform and Edit section on the keyboard.

14.3 Playing a Scale

To select and play a scale on the KOMplete KONTROL keyboard, follow these instructions:

1. Press **SHIFT** + **SCALE (Edit)** to map the displays and knobs of the Control section to the Scale engine parameters.
2. To select a scale, turn Knob 2 (**BANK**, by default set to **MAIN**) and Knob 3 (**TYPE**, by default set to **MAJOR**) until you find a scale you like.
3. To play the scale you selected, ensure that the **SCALE (Edit)** button is lit.
⇒ The keys on the keyboard are now mapped to the notes in the selected scale. The mapping is reflected visually by the Light Guide. Pressing any unlit key automatically activates the nearest lit key so that only notes belonging to the selected scales are being played back!
4. To map the knobs and displays to Instrument parameters again, press **PLUG-IN**. The Scale engine will still be switched on.



If you selected Scale Type **CHROM**, all keys are lit.

14.4 Playing Chords

You can play chords in the usual way by pressing any number of keys simultaneously (or send multiple MIDI notes simultaneously from the host), but **KOMPLETE KONTROL** also lets you create and play chords by using Smart Play.



To play multiple notes in a chord simultaneously, the loaded Instrument must be able to handle polyphony.

To play a chord by only pressing a single key on the keyboard, follow these instructions:


1. Press **SHIFT** + **SCALE (Edit)** to map the displays and knobs of the Control section to the Scale engine parameters.
2. To activate Chord mode, set **MODE** to **HARM** by turning Knob 5 (by default set to **OFF**).
3. Define the intervals of your chord with the **TYPE** parameter by turning Knob 6 (by default set to 1-3-5).

4. To enable playing full chords, ensure that the **SCALE (Edit)** button is lit.
 - ⇒ Chord mode is activated and set to *Harmonizer*. Pressing any key automatically activates and plays back the nearest lit key according to the mapping by selected scale. It also plays back the **third** and the **fifth** note above the pressed key in the selected scale, in accordance with the interval value set by Knob 6 (1-3-5, meaning the first, third, and fifth note of a chord). All played back notes are indicated by the Light Guide.
5. To map the knobs and displays to Instrument parameters again, press **PLUG-IN**. The Scale engine remains switched on.

14.5 Editing Scales and Chords

You have the possibility to tailor the scales and chords to your liking using the Scale engine parameters.

- ▶ To edit the Scale engine parameters in the KOMplete KONTROL software, click on **SCALE** in the Perform panel so it is highlighted.

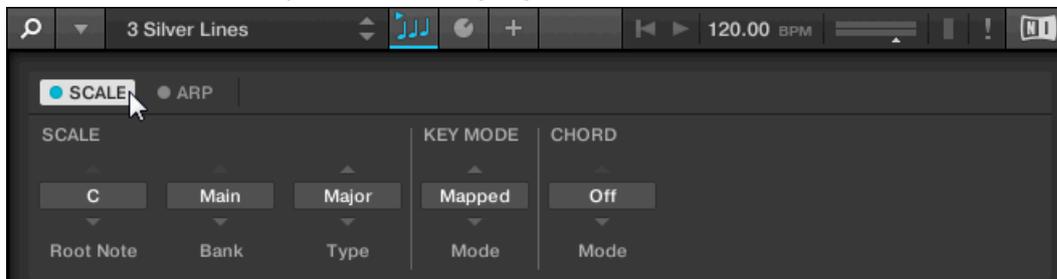

- ▶ To enable Scale Edit mode and map the Scale engine parameters to the keyboard's Control section, press **SHIFT + SCALE (Edit)**.

→ You can now edit the Scale engine parameters on the keyboard's Control section.


Available Scale Parameters

- To select the scale to be mapped to the keys of the keyboard and set its root note, use the **SCALE** parameters **Root Note**, **Bank**, and **Type**.

- To define how the selected scale is mapped to the keys of the keyboard, use the [KEY MODE](#) parameter.
- To automatically generate custom chords while playing on the keyboard, use the [CHORD](#) parameters [Mode](#), [Type](#), and [Position](#).

14.6 Setting the Scale Parameters

The [SCALE](#) parameters [Root Note](#), [Bank](#), and [Type](#) allow you to select the scale to be mapped to the keys of the keyboard and set its root note.

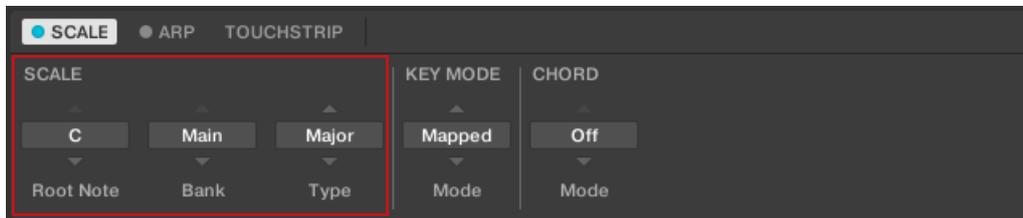

The [SCALE](#) parameters [Root Note](#), [Bank](#), and [Type](#).

14.6.1 Scale Root Note

The first [SCALE](#) parameter is [Root Note](#). On the keyboard, it is mapped to Knob 1 of the Control section in Scale Edit mode. Setting the root note of a scale means deciding what key the scale will begin with. The following notes of the scale depend on which scale pattern you select with the [SCALE Type](#) parameter (see below). You can transpose any scale pattern up or down by selecting a different [Root Note](#).



The Light Guide indicates the selected [Root Note](#) via fully lit LEDs, while other active keys are half-lit.

The [Root Note](#) setting includes the following values:

- *C*
- *C#*

- *D*
- *D#*
- *E*
- *F*
- *F#*
- *G*
- *G#*
- *A*
- *A#*
- *B*

14.6.2 Scale Bank and Type

The second and third **SCALE** parameters from the left are **Bank** and **Type**. On the keyboard, they are mapped to Knob 2 and Knob 3 of the Control section in Scale Edit mode. Use them to decide the scale pattern according to which the notes will be mapped onto the keys of the KOMPLETE KONTROL keyboard. Each **Bank** consists of 15 thematically related scales, which can be selected by using the **Type** control.

For example, using the default **Root Note** value *C* combined with the default **Type** *Major* from the default **Bank** *Main*, you get the scale C major, which spans over one octave and contains the notes C, D, E, F, G, A, and B (followed by C again). If instead you select *G* as your **Root Note**, the G major scale contains the notes G, A, B, C, D, E, and F# (followed by G again). You will notice that the distance between each note follows the same pattern of “whole step–whole step–half step–whole step–whole step–whole step–half step,” which is the pattern of the *Major* scale.

If you are triggering an Instrument via an incoming MIDI pattern from the host, the notes of the MIDI pattern will be mapped onto the closest keys belonging to the selected **Type**. This means that, for example (with **Root Note** set to *C*) a MIDI pattern consisting of the notes **C-D-D#** will be played back as such if **Type** is set to *Chromatic* (named **CHROM** on the keyboard) from **Bank** *Main*, but instead as **C-D-E** if **Type** is set to *Major*.



The Light Guide indicates the active keys in the selected **Type** via lit LEDs, while inactive keys are unlit.

The following scales are available:

Scale	Bank	Type	Degree Formula
Chromatic	<i>Main</i>	<i>Chrom</i>	1 b2 2 b3 3 4 b5 5 b6 6 b7 7
Major	<i>Main</i>	<i>Major</i>	1 2 3 4 5 6 7
Minor	<i>Main</i>	<i>Minor</i>	1 2 b3 4 5 b6 b7
Harm Min	<i>Main</i>	<i>Harm Min</i>	1 2 b3 4 5 b6 7
Maj Pent	<i>Main</i>	<i>Maj Pent</i>	1 2 3 5 6
Min Pent	<i>Main</i>	<i>Min Pent</i>	1 b3 4 5 b7
Blues	<i>Main</i>	<i>Blues</i>	1 b3 4 #4 5 b7
Japanese	<i>Main</i>	<i>Japanese</i>	1 2 b3 5 b6
Freygish	<i>Main</i>	<i>Freygish</i>	1 b2 3 4 5 b6 b7
Gypsy	<i>Main</i>	<i>Gypsy</i>	1 2 b3 #4 5 b6 7
Arabic	<i>Main</i>	<i>Arabic</i>	1 b2 3 4 5 b6 7
Altered	<i>Main</i>	<i>Altered</i>	1 b2 #2 3 #4 b6 b7
Whole Tone	<i>Main</i>	<i>WH Tone</i>	1 2 3 #4 #5 b7
H-W Dim	<i>Main</i>	<i>H-W Dim</i>	1 b2 #2 3 #4 5 6 b7
W-H Dim	<i>Main</i>	<i>W-H Dim</i>	1 2 b3 4 #4 #5 6 7
Ionian	<i>Modes</i>	<i>Ionian</i>	1 2 3 4 5 6 7
Dorian	<i>Modes</i>	<i>Dorian</i>	1 2 b3 4 5 6 b7
Phrygian	<i>Modes</i>	<i>Phrygian</i>	1 b2 b3 4 5 b6 b7
Lydian	<i>Modes</i>	<i>Lydian</i>	1 2 3 #4 5 6 7
Mixolydian	<i>Modes</i>	<i>Mixolyd</i>	1 2 3 4 5 6 b7
Aeolian	<i>Modes</i>	<i>Aeolian</i>	1 2 b3 4 5 b6 b7
Locrian	<i>Modes</i>	<i>Locrian</i>	1 b2 b3 4 b5 b6 b7
Ionian b2	<i>Modes</i>	<i>Ion b2</i>	1 b2 3 4 5 6 7

Scale	Bank	Type	Degree Formula
Dorian b5	<i>Modes</i>	<i>Dor b5</i>	1 2 b3 4 b5 6 b7
Harm Phryg	<i>Modes</i>	<i>Har Phry</i>	1 b2 b3 4 5 b6 7
Phryg Major	<i>Modes</i>	<i>Phry Maj</i>	1 b2 b3 4 5 6 7
Lydian b3	<i>Modes</i>	<i>Lyd b3</i>	1 2 b3 #4 5 6 7
Major Locrian	<i>Modes</i>	<i>Maj Loc</i>	1 2 3 4 b5 b6 b7
Minor Locrian	<i>Modes</i>	<i>Min Loc</i>	1 2 b3 4 b5 b6 b7
Super Locrian	<i>Modes</i>	<i>Sup Loc</i>	1 b2 b3 b4 b5 b6 b7
Lydian b7	<i>Jazz</i>	<i>Lyd b7</i>	1 2 3 #4 5 6 b7
Altered	<i>Jazz</i>	<i>Altered</i>	1 b2 #2 3 #4 b6 b7
Diminished	<i>Jazz</i>	<i>Diminshd</i>	1 b2 #2 3 #4 5 6 b7
Mixo b13	<i>Jazz</i>	<i>Mix b13</i>	1 2 3 4 5 b6 b7
Mixo b9 b13	<i>Jazz</i>	<i>Mixb9b13</i>	1 b2 3 4 5 b6 b7
Lydian b7 b2	<i>Jazz</i>	<i>Lyd b7b2</i>	1 b2 3 #4 5 6 b7
Bebop	<i>Jazz</i>	<i>Bebop</i>	1 2 3 4 5 6 b7 7
Whole Tone	<i>Jazz</i>	<i>Whole Tn</i>	1 2 3 #4 #5 b7
Blues Maj	<i>Jazz</i>	<i>Blues Ma</i>	1 2 b3 3 5 6
Blues Min	<i>Jazz</i>	<i>Blues Mi</i>	1 b3 4 #4 5 b7
Blues Combined	<i>Jazz</i>	<i>BluesCmb</i>	1 2 b3 3 4 #4 5 6 b7
Lydian #5	<i>Jazz</i>	<i>Lyd #5</i>	1 2 3 #4 #5 6 7
Jazz Minor	<i>Jazz</i>	<i>Jazz Mi</i>	1 2 b3 4 5 6 7
Half Dim	<i>Jazz</i>	<i>Half Dim</i>	1 2 b3 4 b5 b6 b7
Augmented	<i>Jazz</i>	<i>Augmentd</i>	1 b3 3 5 #5 7
Hungarian Min	<i>World</i>	<i>Hung Min</i>	1 2 b3 #4 5 b6 7


Scale	Bank	Type	Degree Formula
Hungarian Maj	<i>World</i>	<i>Hung Maj</i>	1 #2 3 #4 5 6 b7
Neapolitan	<i>World</i>	<i>Neapoltn</i>	1 b2 b3 4 5 b6 7
Spanish	<i>World</i>	<i>Spanish</i>	1 b2 b3 3 4 5 b6 b7
Greek	<i>World</i>	<i>Greek</i>	1 2 b3 b4 5 b6 b7
Jewish 1	<i>World</i>	<i>Jewish 1</i>	1 b2 3 4 5 b6 b7
Jewish 2	<i>World</i>	<i>Jewish 2</i>	1 2 b3 #4 5 6 b7
Indian 1	<i>World</i>	<i>Indian 1</i>	1 b2 b3 #4 5 b6 7
Indian 2	<i>World</i>	<i>Indian 2</i>	1 2 b3 #4 5 6 7
Indian 3	<i>World</i>	<i>Indian 3</i>	1 b2 2 4 5 b6 6
Indian 4	<i>World</i>	<i>Indian 4</i>	1 #2 3 4 5 #6 7
Mid East 1	<i>World</i>	<i>M East 1</i>	1 b2 3 4 5 b6 7
Mid East 2	<i>World</i>	<i>M East 2</i>	1 b2 3 4 b5 b6 7
Mid East 3	<i>World</i>	<i>M East 3</i>	1 b2 b3 4 b5 6 b7
Mid East 4	<i>World</i>	<i>M East 4</i>	1 b2 3 4 b5 6 b7
Penta I	<i>5-Tone</i>	<i>Pent I</i>	1 2 3 5 6
Penta II	<i>5-Tone</i>	<i>Pent II</i>	1 2 4 5 b7
Penta III	<i>5-Tone</i>	<i>Pent III</i>	1 b3 4 b6 b7
Penta IV	<i>5-Tone</i>	<i>Pent IV</i>	1 2 4 5 6
Penta V	<i>5-Tone</i>	<i>Pent V</i>	1 b3 4 5 b7
Hirajoshi	<i>5-Tone</i>	<i>Hira</i>	1 2 b3 5 b6
Insen	<i>5-Tone</i>	<i>Insen</i>	1 b2 4 5 b7
Kokin Joshi	<i>5-Tone</i>	<i>Kokin</i>	1 2 4 5 b6
Akebono	<i>5-Tone</i>	<i>Akebono</i>	1 2 b3 5 6

Scale	Bank	Type	Degree Formula
Ryukuan	<i>5-Tone</i>	<i>Ryukuan</i>	1 3 4 5 7
Abhogi	<i>5-Tone</i>	<i>Abhogi</i>	1 2 b3 4 6
Bhupathi	<i>5-Tone</i>	<i>Bhupkali</i>	1 2 3 5 b6
Hindolam	<i>5-Tone</i>	<i>Hindolam</i>	1 b3 4 b6 b7
Bhupalam	<i>5-Tone</i>	<i>Bhupalam</i>	1 b2 b3 5 b6
Amritavarshini	<i>5-Tone</i>	<i>Amrita</i>	1 3 #4 5 7
Octatonic	<i>Modern</i>	<i>Octatonic</i>	1 2 b3 4 #4 #5 6 7
Acoustic	<i>Modern</i>	<i>Acoustic</i>	1 2 3 #4 5 6 b7
Augmented	<i>Modern</i>	<i>Augmentd</i>	1 b3 3 5 #5 7
Tritone	<i>Modern</i>	<i>Tritone</i>	1 b2 3 b5 5 b7
Leading Wh Tone	<i>Modern</i>	<i>Lead Wh</i>	1 2 3 #4 #5 #6 7
Enigmatic	<i>Modern</i>	<i>Enigmatc</i>	1 b2 3 #4 #5 #6 7
Scriabin	<i>Modern</i>	<i>Scriabin</i>	1 2 3 #4 6 b7
Tcherepnin	<i>Modern</i>	<i>Tcherepn</i>	1 #1 #2 3 4 5 #5 6 7
Messiaen I	<i>Modern</i>	<i>Mes I</i>	1 2 3 #4 #5 #6
Messiaen II	<i>Modern</i>	<i>Mes II</i>	1 b2 #2 3 #4 5 6 b7
Messiaen III	<i>Modern</i>	<i>Mes III</i>	1 2 b3 3 #4 5 b6 b7 7
Messiaen IV	<i>Modern</i>	<i>Mes IV</i>	1 b2 2 4 #4 5 b6 7
Messiaen V	<i>Modern</i>	<i>Mes V</i>	1 b2 4 #4 5 7
Messiaen VI	<i>Modern</i>	<i>Mes VI</i>	1 2 3 4 #4 #5 #6 7
Messiaen VII	<i>Modern</i>	<i>Mes VII</i>	1 b2 2 b3 4 #4 5 b6 6 7
Natural	<i>Major</i>	<i>Natural</i>	1 2 3 4 5 6 7
Lydian	<i>Major</i>	<i>Lydian</i>	1 2 3 #4 5 6 7

Scale	Bank	Type	Degree Formula
Mixolydian	<i>Major</i>	<i>Mixolyd</i>	1 2 3 4 5 6 b7
Major Minor	<i>Major</i>	<i>Maj Min</i>	1 2 3 4 5 b6 b7
Harmonic Major	<i>Major</i>	<i>Har Maj</i>	1 2 3 4 5 b6 7
Dbl Har Major	<i>Major</i>	<i>Dbl Maj</i>	1 b2 3 4 5 b6 7
Neapolitan Maj	<i>Major</i>	<i>Nea Maj</i>	1 b2 3 4 5 6 7
Major Locrian	<i>Major</i>	<i>Maj Loc</i>	1 2 3 4 b5 b6 b7
Blues Major	<i>Major</i>	<i>Blues Ma</i>	1 2 b3 3 5 6
Bebop Major	<i>Major</i>	<i>Bebop Ma</i>	1 2 3 4 5 #5 6 7
Hexa 1	<i>Major</i>	<i>Hexa 1</i>	1 2 3 5 6 7
Hexa 2	<i>Major</i>	<i>Hexa 2</i>	1 2 3 4 5 6
Penta 1	<i>Major</i>	<i>Penta 1</i>	1 2 3 5 6
Penta 2	<i>Major</i>	<i>Penta 2</i>	1 3 4 5 7
Penta 3	<i>Major</i>	<i>Penta 3</i>	1 3 5 6 7
Natural	<i>Minor</i>	<i>Natural</i>	1 2 b3 4 5 b6 b7
Dorian	<i>Minor</i>	<i>Dorian</i>	1 2 b3 4 5 6 b7
Phrygian	<i>Minor</i>	<i>Phrygian</i>	1 b2 b3 4 5 b6 b7
Minor Major	<i>Minor</i>	<i>Min Maj</i>	1 2 b3 4 5 6 7
Harmonic Minor	<i>Minor</i>	<i>Har Min</i>	1 2 b3 4 5 b6 7
Dbl Har Minor	<i>Minor</i>	<i>Dbl Min</i>	1 2 b3 #4 5 b6 7
Neapolitan Min	<i>Minor</i>	<i>Nea Min</i>	1 b2 b3 4 5 b6 7
Minor Locrian	<i>Minor</i>	<i>Min Loc</i>	1 2 b3 4 b5 b6 b7
Blues Min	<i>Minor</i>	<i>Blues Mi</i>	1 b3 4 #4 5 b7
Bebop Minor	<i>Minor</i>	<i>Bebop Mi</i>	1 2 b3 4 5 b6 b7 7

Scale	Bank	Type	Degree Formula
Hexa 1	<i>Minor</i>	<i>Hexa 1</i>	1 2 b3 5 b6 b7
Hexa 2	<i>Minor</i>	<i>Hexa 2</i>	1 2 b3 4 5 b6
Penta 1	<i>Minor</i>	<i>Penta 1</i>	1 2 b3 5 b6
Penta 2	<i>Minor</i>	<i>Penta 2</i>	1 b3 4 5 b7
Penta 3	<i>Minor</i>	<i>Penta 3</i>	1 b3 5 b6 b7

14.7 Setting the Key Mode Parameter

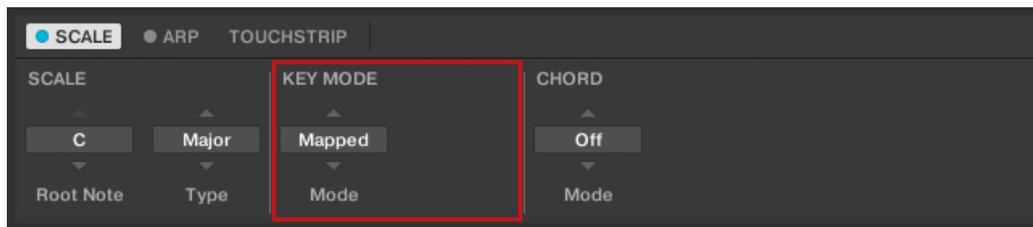

The **KEY MODE** parameter **Mode**.

The only **KEY MODE** parameter is **Mode**. On the keyboard, it is mapped to Knob 3 of the Control section in Scale Edit mode. It defines how the selected is mapped to the keys of the keyboard. This is also reflected by the Light Guide. The **KEY MODE** menu consists of the following three modes, which are described in detail below:

- *Guide*
- *Mapped* (default value)
- *Easy*

Mapped Mode (Default)

In *Mapped* mode, the notes are mapped to the keyboard according to the selected scale. Notes outside of the selected scale are not active. Pressing the corresponding keys will trigger the next available note in the selected scale. The Light Guide highlights the active keys via lit LEDs. The **Root Note** is indicated by a brighter lit LED.



Both sections Root Note and Scale Type describe the use of Scale on the assumption that the **KEY MODE** is set to its default value Mapped.

Guide Mode

In *Guide* mode, the notes are mapped to the keyboard in the same way as in *Mapped* mode, however notes outside of the selected scale remain active. The mapping only affects the representation of the scale by means of the Light Guide.

Easy Mode

In *Easy* mode, the notes of the selected scale are mapped to the keyboard so that any scale can be played using the white keys of the keyboard only. The black keys are inactive and pressing them will not trigger any other notes.



Selecting the 12-step Chromatic scale in **KEY MODE Easy** maps the keys in the same way as in the *Mapped* mode.

The **Root Note** is always mapped to the middle C key (commonly called C3). If the selected scale consists of seven notes, it matches the seven white keys of a single octave on the keyboard. In this case, the **Root Note** coincides with the key C across all octaves of the keyboard. If instead the selected scale consists of more or less than seven notes, it does not match the seven white keys of a single octave on the keyboard and the **Root Note** is shifted throughout adjacent octaves accordingly.


The Light Guide highlights all white keys of the keyboard. The **Root Note** is indicated by a brighter lit LED.

For two examples of the *Easy* mode mappings in *Major* and *Minor*, see below.

Scale Type	Mapping in Key Mode: Easy							
White Keys	C3	D3	E3	F3	G3	A3	B3	
<i>Major</i>								
Corresponding Mapping	R	2	3	4	5	6	7	
Example with Root Note: C	C	D	E	F	G	A	B	
<i>Minor</i>								
Corresponding Mapping	R	2	b3	4	5	b6	b7	
Example with Root Note: C	C	D	E ^b	F	G	A ^b	B ^b	

14.8 Setting the Chord Parameters

14.8.1 Chord Mode

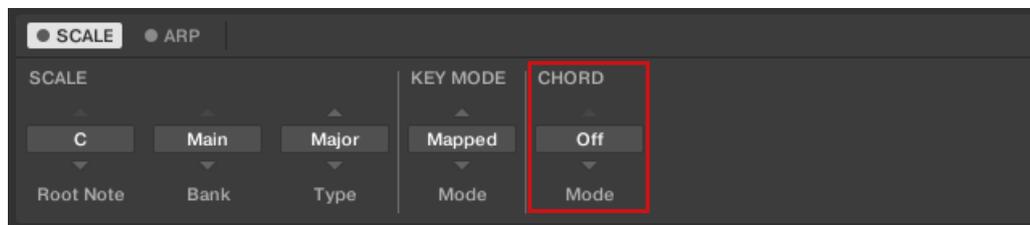

The CHORD parameter Mode.

The first CHORD parameter is Mode. On the keyboard, it is mapped to Knob 5 of the Control section in Scale Edit mode. Use it to generate chords from single notes, either from the COMPLETE KONTROL keyboard or from incoming MIDI notes from the host.



The Light Guide indicates the keys being played back in a chord via fully lit LEDs, while active keys are half-lit and inactive keys are unlit.

CHORD Mode has one inactive (*Off*) and two active states, which are described in detail below:

- *Off*
- *Harm*
- *Chd Set*

Harm


If CHORD Mode is set to *Harm*, the CHORD Type menu allows you to specify the interval of notes in the selected SCALE Type that will constitute the chord: E.g. a triad in the form of the root note, the third note, and the fifth note (CHORD Type value *1-3-5*).



The CHORD parameter Mode, set value *Harm*.

Chd Set

If CHORD Mode is set to *Chd Set*, the CHORD Type menu allows you to choose from a selection of major and minor chords depending on the current Root Note.

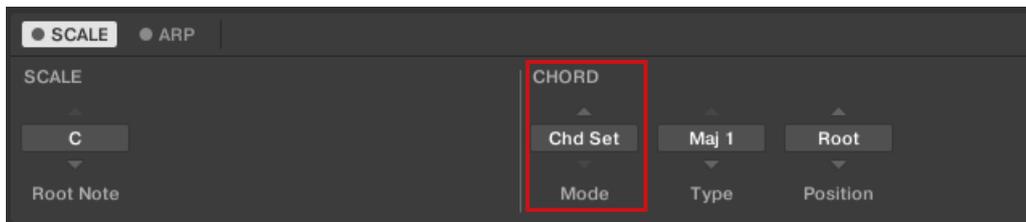


The CHORD parameter Mode, set value *Chd Set*.



The **SCALE Type** and **KEY MODE** parameters are not available when **CHORD Mode** is set to *Chd Set*.

14.8.2 Chord Type

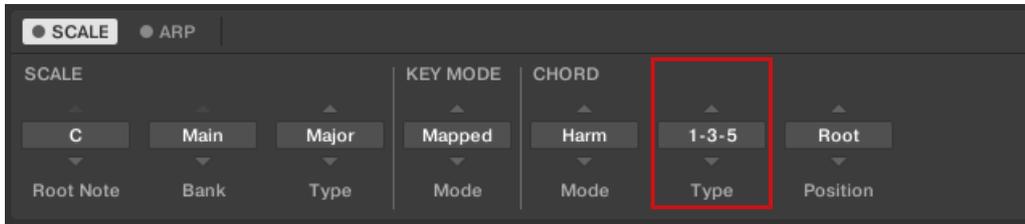

The **CHORD** parameter **Type**.


The second **CHORD** parameter is **Type**. On the keyboard, it is mapped to Knob 6 of the Control section in Scale Edit mode. Use it to define a chord that will be generated from a single note used as input.



The Light Guide indicates the keys being played back in a chord via fully lit LEDs, while active keys are half-lit and inactive keys are unlit.

The available **CHORD Type** values depend on whether **CHORD Mode** is set to *Harm* or *Chd Set*, as described in detail below.

Chord Type, Chord mode Set to Harmonizer

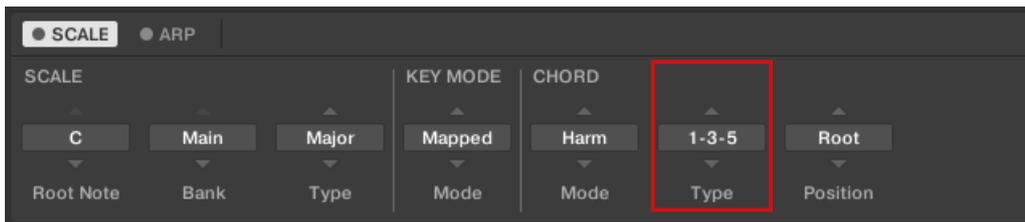

The **CHORD** parameter **Type**, set value *1-3-5* (**Mode** set to *Harm*).


If **CHORD Mode** is set to *Harm*, then **CHORD Type** will offer you a selection of individual notes present in the selected **SCALE Type**. This means that for all scales except the 12-tone *Chrom* scale (see further below), you can select the interval of notes that will make up your chord.

The note interval is added onto the key of an incoming MIDI note, either from the COMPLETE KONTROL keyboard or from the host. For example, you can select to play a C minor triad by setting **Root Note** to *C*, **SCALE Type** to *Minor*, **CHORD Mode** to *Harm*, and **CHORD Type** to *1-3-5*. If all of this seems complex, try setting a random value and use the keyboard's Light Guide to see what keys are active, inactive, and played back.

When **CHORD Mode** is set to *Harm*, the **CHORD Type** setting includes the following values:

Chord Type	Interval Added to Played Note
<i>Octave</i>	Octave
<i>1-3</i>	3rd
<i>1-5</i>	5th
<i>1-3-5</i>	3rd and 5th
<i>1-4-5</i>	4th and 5th
<i>1-3-5-7</i>	3rd, 5th and 7th
<i>1-4-7</i>	4th and 7th

Chord Type, Chord mode Set to Chord Set

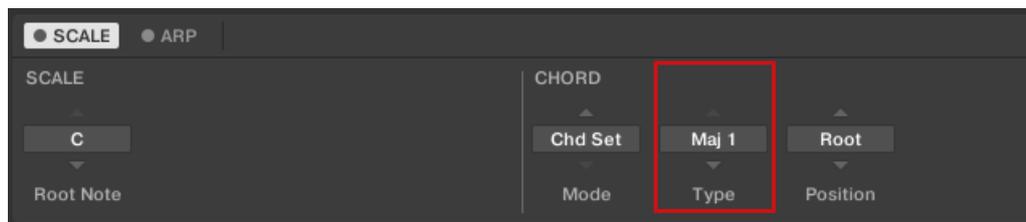

The **CHORD** parameter **Type**, set value *Maj 1* (**Mode** set to *Chd Set*).

If **CHORD Mode** is set to *Chd Set* and, for example, the **Root Note** is set to *C*, then the **CHORD Type** menu presents you with a list of selectable chords. Values are, e.g., *Maj 4* and *Min 7*, which would generate a major and minor chord, respectively—both using *C* as the chord's root note.

When **CHORD Mode** is set to *Chd Set*, the **CHORD Type** setting includes the following values:


- *Maj 1*
- *Maj 2*
- *Maj 3*
- *Maj 4*
- *Maj 5*
- *Maj 6*
- *Maj 7*
- *Maj 8*
- *Min 1*
- *Min 2*
- *Min 3*
- *Min 4*
- *Min 5*
- *Min 6*
- *Min 7*
- *Min 8*

Chord Type and the Chromatic Scale

The *Chrom* scale consists of every semitone in an octave. That means that when you play every white key and every black key of an octave up or down, you are playing the 12-step *Chrom* scale. Since all semitones of an octave are present in the Scale, you can use all keys to form chords. In turn, selecting *Chrom* as **SCALE Type** means that you can select virtually any **CHORD Type**. The following chords are available and can be generated:

Chord Type	Semitones Added above Played Note
<i>Octave</i>	12
<i>Perf 4</i> (Perfect 4)	5
<i>Perf 5</i> (Perfect 5)	7
<i>Major</i>	4 and 7
<i>Minor</i>	3 and 7
<i>Sus 4</i> (Suspended 4)	5 and 7
<i>Maj 7</i> (Major 7)	4, 7 and 11
<i>Min 7</i> (Minor 7)	3, 7 and 10
<i>Dom 7</i> (Dominant 7)	4, 7 and 10
<i>Dom 7⁹</i> (Dominant 9)	4, 7, 10 and 14
<i>Min 7 b5</i> (Minor 7 b5)	3, 6 and 10
<i>Dim 7</i> (Diminished 7)	3, 6 and 9
<i>Aug</i> (Augumented)	4 and 8
<i>Quartal</i>	5, 10 and 15
<i>Trichd</i> (Trichord)	5 and 11

14.8.3 Chord Position

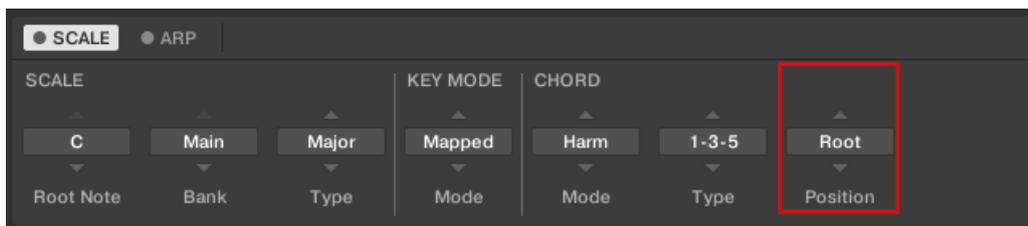

The CHORD parameter Position.

The third **CHORD** parameter is **Position**. On the keyboard, it is mapped to Knob 7 of the Control section in Scale Edit mode. Use it to spread the notes of a chord generated from a single note and to aid a more musical transition between chords.

The **Position** parameter is available when **CHORD Type** is set to *Harm* or *Chd Set* and includes the following values:


Position	Description
<i>Root</i>	The root-position of the selected chord is always played.
<i>-1 to -8</i>	Decreasing <i>Position</i> with negative values moves the highest note of the current chord down by an octave, this inverts the chord to a lower position in the selected scale.
<i>+1 to +8</i>	Increasing <i>Position</i> with positive values moves the lowest note of the current chord up by an octave, this inverts the chord to a higher position in the selected scale.
<i>Auto</i>	This provides a more human feel in the transition from one chord to another. The notes used to form each chord are automatically selected to provide the best inversion.

15 Playing and Editing the Arpeggiator


Smart Play features a flexible and versatile Arpeggiator that lets you play your Instruments in note sequences according to the keys you press on the keyboard. You can also use the Arpeggiator in combination with the scales and chords created with the Scale engine. To play an arpeggiated note sequence you only need to press any key on the KOMplete KONTROL keyboard or receive an incoming MIDI note from the host.

Activating the Arpeggiator in the KOMplete KONTROL Software


- ▶ Click the Perform panel button in the Header to show the Perform panel.



- The Perform panel appears in KOMplete KONTROL.

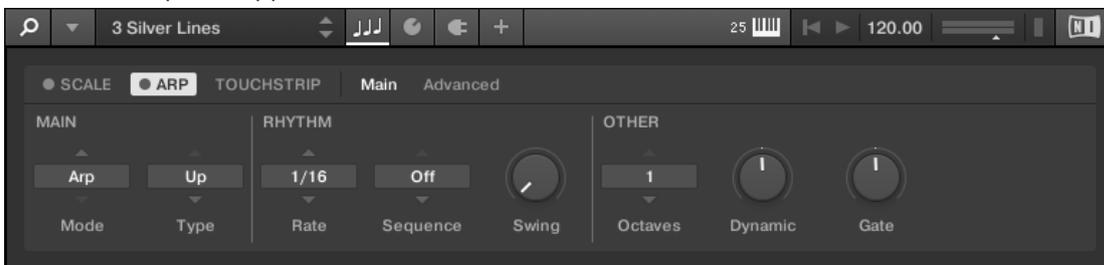

- ▶ To switch on the Arpeggiator, click the blue check box next to **ARP** in the Perform panel so it is filled.

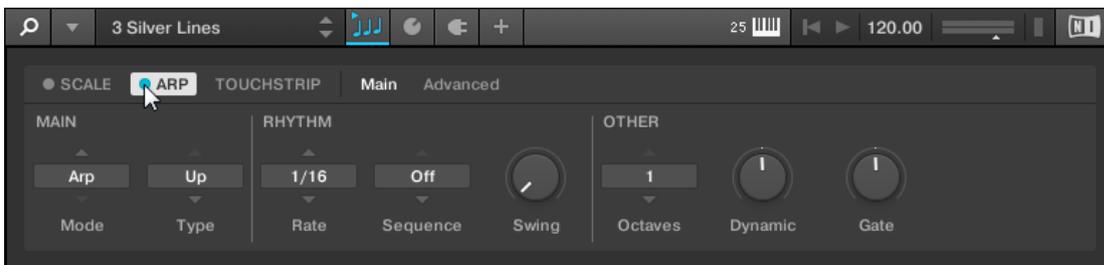

Activating the Arpeggiator on the Keyboard

- ▶ To switch on the Arpeggiator, press **ARP (Edit)** in the Perform and Edit section on the keyboard.

15.1 Playing Arpeggiator Sequences

KOMPLETTE KONTROL lets you create and play complex arpeggiator sequences using Smart Play.

1. Switch on the Arpeggiator by pressing the **ARP (Edit)** button on the keyboard.
2. Press a number of keys to start the Arpeggiator.
3. The Arpeggiator automatically plays back the notes corresponding to the pressed keys as a sequence, rather than simultaneously.

You can also edit the Arpeggiator parameters in the Control section for further tweaking of the sequence:

1. Press **SHIFT + ARP (Edit)** to map the displays and knobs of the Control section to the Arpeggiator parameters.
2. To change the direction of the sequence to e.g. **UP-DOWN**, turn Knob 2 (**TYPE**, by default set to **UP**).
3. To adjust the **OCTAVES** reach of the Arpeggiator, turn Knob 6 (by default set to **1**) to e.g. **4**.

15.2 Using a Sustain Pedal to Control the Arpeggiator

You can use a sustain pedal to control the Arpeggiator.

1. Pressing the sustain pedal while keys are held and then releasing those keys continues the arpeggiator sequence. This way the footswitch behaves as a trigger for the Arpeggiator. When a new key is pressed, the new note is added to the current sequence.

2. Releasing the sustain pedal with no keys pressed stops the sequence and all playing notes. Releasing the sustain pedal with keys still pressed removes all notes from the sequence except those corresponding to the pressed keys—the sequence continues with the pressed keys only.

15.3 Using Arpeggiator Snapshots on the Keyboard

The Arpeggiator snapshots let you quickly recall four sets of Arpeggiator settings. This way you can compare settings, or quickly switch between them during a performance. On the keyboard, the snapshots are mapped to Button 5–8 on the Control section in Arp Edit mode. In the displays, they are labeled with their respective settings for the **RATE** parameter (e.g. 1/8, 1/16, 1/16 T, etc.).

- ▶ To select a snapshot, press its corresponding button on the keyboard's Control section.
- All settings associated with this snapshot are instantly recalled.
- ▶ To change the settings associated with a snapshot, select it and adjust the parameters.
- The new settings are saved automatically, and you can switch forth and back between snapshots to recall them.




Arpeggiator snapshots in the Control section

15.4 Editing the Arpeggiator

The Arpeggiator's parameters give you many possibilities to shape your own note sequences.

- ▶ To edit the Arpeggiator parameters in the KOMplete KONTROL software, click on **ARP** in the Perform panel so it is highlighted.

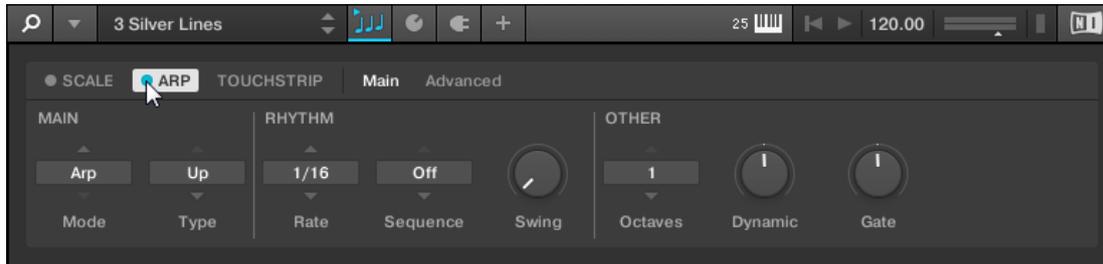


- ▶ To enable Arpeggiator Edit mode and map the Arpeggiator parameters to the keyboard's Control section, press **SHIFT + ARP (Edit)**.
- You can now edit the Arpeggiator parameters on the keyboard's Control section. Note that the Arpeggiator Edit mode consists of two pages.

Available Arpeggiator Parameters

- To switch between *Arp* and *Note Repeat* mode and change the playback direction of the arpeggiator sequence, use the **MAIN** parameters **Mode** and **Type**.
- To create interesting rhythms for the arpeggiator sequence, use the **RHYTHM** parameters **Rate**, **Sequence**, and **Swing**.
- To change the range of available notes for the arpeggiator sequence, as well as their velocity and length, use the **OTHER** parameters **Octaves**, **Dynamic**, and **Gate**.
- To explore alternative versions of the same arpeggiator sequence, use the **ADVANCED** parameters **Retrigger**, **Repeat**, **Offset**, and **Inversion**.
- To change the range of keys that trigger the arpeggiator sequence, use the **RANGE** parameters **Min. Key** and **Max. Key**.
- To latch the playback of the arpeggiator sequence, use the **HOLD** parameter.

15.5 Setting the Main Parameters

The **MAIN** parameters **Mode** and **Type** allow you to switch between *Arp* and *Note Repeat* mode and change the playback direction of the arpeggiator sequence.

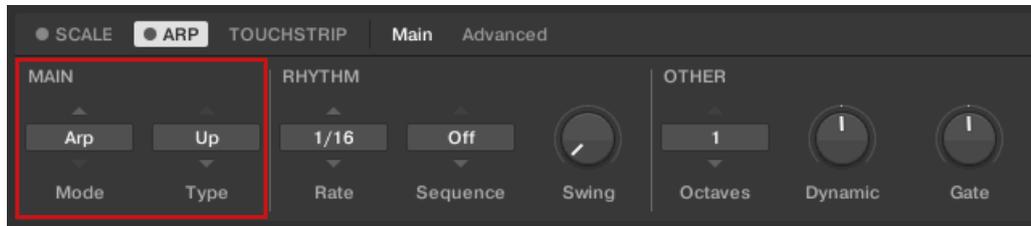

The **MAIN** parameters **Mode** and **Type**.

15.5.1 Main Mode

The first **MAIN** parameter is **Mode**. On the keyboard, it is mapped to Knob 1 of the Control section in Arp Edit mode. It lets you select either *Arp* or *Note Repeat*. Depending on your selection, a different set of Arpeggiator parameters will be available for further editing.

The **Mode** setting consists of the following two modes:

- *Arp* mode, which generates arpeggiator sequences based on chords you play on the keyboard, or the output of the Scale engine. With **ARP** switched on and **Mode** set to *Arp*, any chord you created using the Scale engine will play as an arpeggiated note sequence. In this case, you only need to press one key on the keyboard to hear the arpeggiated notes play out according to the selected scale.
- *Note Repeat* mode, which deactivates the Arpeggiator and instead repeats whichever note is input until KOMPLETTE KONTROL receives a MIDI note-off message. Use the parameters **Rate**, **Swing**, and **Gate** to change the rhythm of the repeats.

15.5.2 Main Type

The second MAIN parameter, *Type*, is only available in *Arp* mode. On the keyboard, it is mapped to Knob 2 of the Control section in *Arp Edit* mode. It sets the sequential order of the arpeggiated notes. Choose whether your arpeggiated chord should be played from the root note and up, the other way around, or even simultaneously. Selecting *Order Played* will play back the notes in the order you pressed down the corresponding keys on the KOMPLETE KONTROL keyboard. Automating the *Type* parameter in the host can create interesting variations and textures.

The *Type* setting includes the following values:

- *Up*
- *Down*
- *Up & Down* (UP-DOWN on the keyboard)
- *Order Played* (PLAYED on the keyboard)
- *Chord*

15.6 Setting the Rhythm Parameters

The RHYTHM parameters *Rate*, *Sequence*, and *Swing* allow you to create interesting rhythms for the arpeggiator sequence.



The RHYTHM parameters *Rate*, *Sequence*, and *Swing*.

15.6.1 Rhythm Rate

The first RHYTHM parameter, *Rate*, is available in both *Arp* and *Note Repeat* mode. On the keyboard, it is mapped to Knob 3 of the Control section in Arp Edit mode. It sets the beat of the Arpeggiator in relation to global tempo in musical values, ranging from $1/1$ to $1/128$. All note values (except $1/1$ and $1/128$) are available as basic notes, dotted notes, and triplets. Dotted notes are 1.5 times longer than the corresponding basic notes. Triplets are $2/3$ the duration of their corresponding basic notes, so that e.g. three $1/4$ notes are equal in duration to two basic $1/4$ notes.

The *Rate* setting includes the following values:

- $1/1$
- $1/2$ Dotted ($1/2$ D)
- $1/1$ Triplet ($1/1$ T)
- $1/2$
- $1/4$ Dotted ($1/4$ D)
- $1/2$ Triplet ($1/2$ T)
- $1/4$
- $1/8$ Dotted ($1/8$ D)
- $1/4$ Triplet ($1/4$ T)
- $1/8$
- $1/16$ Dotted ($1/16$ D)
- $1/8$ Triplet ($1/8$ T)
- $1/16$
- $1/32$ Dotted ($1/32$ D)
- $1/16$ Triplet ($1/16$ T)
- $1/32$
- $1/64$ Dotted ($1/64$ D)

- *1/32 Triplet (1/32 T)*
- *1/64*
- *1/128 Dotted (1/128 D)*
- *1/64 Triplet (1/64 T)*
- *1/128*

15.6.2 Rhythm Sequence

The second **RHYTHM** parameter, **Sequence**, is only available in *Arp* mode. On the keyboard, it is mapped to Knob 4 of the Control section in Arp Edit mode. It gives you a way of adding interesting rhythms to your arpeggiated notes. Select one of eight different sequences and apply it to the arpeggiator sequence you are playing. Combine **Sequence** with the **Rate** parameter to create a huge variety of rhythms at different tempos. If **Rate** is set to a basic or dotted value, then **Sequence** applies a 16-step sequencer to the notes. If **Rate** is instead set to a triplet value, then **Sequence** applies a 12-step sequencer to the notes.

You can switch sequences in real time during playback. For example, if sequence *1* is running and you instead select sequence *2* after the fourth MIDI note in a pattern has been played back, then sequence *2* starts when the fifth MIDI note in the pattern is played back.

The **Sequence** setting includes the following values:

- *Off*
- *1*
- *2*
- *3*
- *4*
- *5*
- *6*
- *7*
- *8*



To display the set value of the **SEQUENCE** parameter, tap Knob 4.

15.6.3 Rhythm Swing

The third **RHYTHM** parameter, **Swing**, is available in both *Arp* and *Note Repeat* mode. On the keyboard, it is mapped to Knob 5 of the Control section in Arp Edit mode. Adding **Swing** to your note sequence can make it feel less quantized and sound more natural. **Swing** works by introducing a delay to every second note in a sequence. Doing so often adds a certain groove to the music.

Swing is a drag control that lets you select a value between *0%* and *100%*:

1. Set a value of *0%* to play the note sequence without swing.
2. Increase the **Swing** value to add swing by delaying every second note. The delay length is a percentage of the current step size.




To display the set value of the **SWING** parameter, tap Knob 5.

Using **Swing** in combination with the **Gate** parameter adds further variations in note duration. For example, if **Gate** is set to *100%*, **KOMPLETE KONTROL** sends a MIDI note-off message before each note and plays back the sequence legato. If **Gate** is set to values larger *or* smaller than *100%*, then notes will be scaled after the value of the **Swing** parameter has been applied, leaving the groove intact.

15.7 Setting the Other Parameters

The **OTHER** parameters **Octaves**, **Dynamic**, and **Gate** allow you to change the range of available notes for the arpeggiator sequence, as well as their velocity and length.

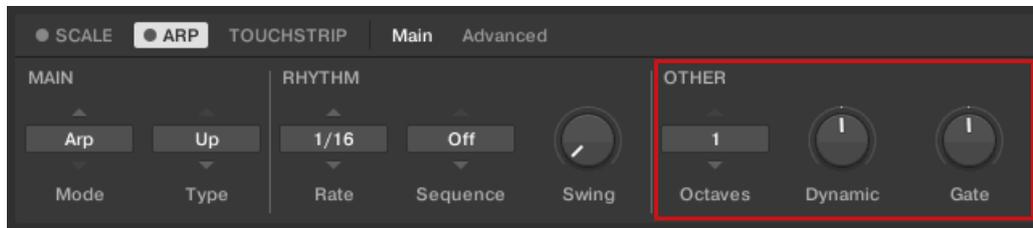

The **OTHER** parameters *Octaves*, *Dynamic*, and *Gate*.

15.7.1 Other Octaves

The first **OTHER** parameter, *Octaves*, is only available in *Arp* mode. On the keyboard, it is mapped to Knob 6 of the Control section in Arp Edit mode. It lets you decide the range of the arpeggiator sequence. You can choose to play back your sequence within the octave of only the keys you pressed on the KOMPLETE KONTROL keyboard, or you can select up to eight octaves and let the corresponding notes of your chord or scale be played back in as many octaves.

Depending on the settings you have made to the *Type* parameter, the octaves played back can be above (e.g. *Up*), below (e.g. *Down*) or both above and below (*Up & Down*) the pressed keys.

The *Octaves* setting includes the following values:

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8



To display the set value of the **OCTAVES** parameter, tap Knob 6.

15.7.2 Other Dynamic

The second **OTHER** parameter, **Dynamic**, is only available in *Arp* mode. On the keyboard it is mapped to Knob 7 of the Control section in *Arp Edit* mode. It reads the velocity of the input—e.g. a key you pressed on the KOMLETE KONTROL keyboard or an incoming MIDI note from the host—and scales it by the factor you set with the **Dynamic** parameter. The scaling is applied per note. The velocity of each played note is taken and multiplied by the value set with the **Dynamic** parameter.

Dynamic is a drag control that lets you set a value between *1.0%* and *200.0%*.



To display the set value of the **DYNAMIC** parameter, tap Knob 7.

15.7.3 Other Gate

The third **OTHER** Parameter, **Gate**, is available in both *Arp* and *Note Repeat* mode. On the keyboard, it is mapped to Knob 8 of the Control section in *Arp Edit* mode. It lets you decide the length of the notes in your sequence. Setting a value between *1%* and *99%* makes the duration of the notes shorter than they otherwise would be. Setting a value between *101%* and *200%* instead elongates the duration of the notes by the selected value.

Gate is a drag control that lets you set a value between *1.0%* and *200.0%*.


The **GATE RESET** function, mapped to Button 4 of the Control section lets you reset the **GATE** parameter to its default value of *100%* at any time.



To display the set value of the **GATE** parameter, tap Knob 8.

15.8 Setting the Advanced Parameters

The **ADVANCED** parameters **Retrigger**, **Repeat**, **Offset**, and **Inversion** allow you to explore alternative versions of the same arpeggiator sequence.

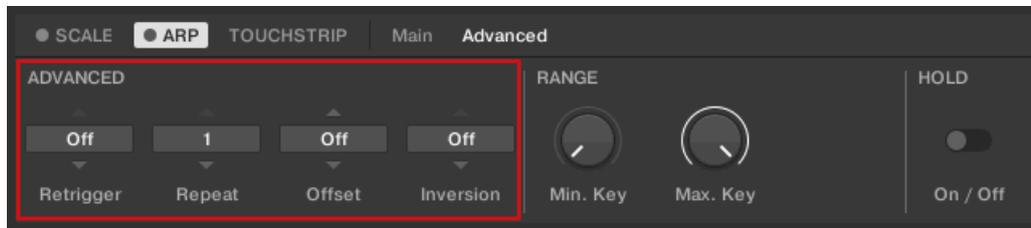

The **ADVANCED** parameters [Retrigger](#), [Repeat](#), [Offset](#), and [Inversion](#).

15.8.1 Advanced Retrigger

The first **ADVANCED** parameter, [Retrigger](#), is only available in *Arp* mode. On the keyboard, it is mapped to Knob 1 of the Control section when page 2 is selected in Arp Edit mode. [Retrigger](#) sets a number of steps in the arpeggiator sequence after which the sequence restarts its cycle, regardless of the number of pitches in the sequence.

For example:

- If the arpeggiator sequence consists of a 5 note cycle (1 - 2 - 3 - 4 - 5) and [Retrigger](#) is set to 3, the Arpeggiator output is 1 - 2 - 3 - repeat.
- If the arpeggiator sequence consists of a 5 note cycle (1 - 2 - 3 - 4 - 5) and [Retrigger](#) is set to 8, the Arpeggiator output is 1 - 2 - 3 - 4 - 5 - 1 - 2 - 3 - repeat.

Rests in a [Sequence](#) are treated as steps:

- If the arpeggiator sequence consists of 6 pitches, the [Sequence](#) is 1 - 2 - 3 - rest - 4 - 5 - 6 - rest, and [Retrigger](#) is set to 5, the Arpeggiator output is 1 - 2 - 3 - rest - 4 - repeat.

15.8.2 Advanced Repeat

The second **ADVANCED** parameter, [Repeat](#), is only available in *Arp* mode. On the keyboard, it is mapped to Knob 2 of the Control section when page 2 is selected in Arp Edit mode. [Repeat](#) sets a number by which each step in the arpeggiator sequence is repeated.

For example:

- If the arpeggiator sequence consists of a 3 note cycle (1 - 2 - 3) and [Repeat](#) is set to 3, the Arpeggiator output is 1 - 1 - 1 - 2 - 2 - 2 - 3 - 3 - 3 - repeat.

15.8.3 Advanced Offset

The third **ADVANCED** parameter, **Offset**, is only available in *Arp* mode. On the keyboard, it is mapped to Knob 3 of the Control section when page 2 is selected in Arp Edit mode. **Offset** sets a number by which the steps in the arpeggiator sequence are shifted in the cycle.

For example:

- If the arpeggiator sequence consists of a 5 note cycle (1 - 2 - 3 - 4 - 5) and **Offset** is set to 0, the Arpeggiator output is 1 - 2 - 3 - 4 - 5 - repeat.
- If the arpeggiator sequence consists of a 5 note cycle (1 - 2 - 3 - 4 - 5) and **Offset** is set to +1, the Arpeggiator output is 2 - 3 - 4 - 5 - 1 - repeat.
- If the arpeggiator sequence consists of a 5 note cycle (1 - 2 - 3 - 4 - 5) and **Offset** is set to -1, the Arpeggiator output is 5 - 1 - 2 - 3 - 4 - repeat.

15.8.4 Advanced Inversion


The fourth **ADVANCED** parameter, **Inversion**, is only available in *Arp* mode. On the keyboard, it is mapped to Knob 4 of the Control section when page 2 is selected in Arp Edit mode. **Inversion** adds inverted alternations of the arpeggiator sequence to the cycle.

For example:

- If the arpeggiator sequence consists of a 3 note cycle (1 - 2 - 3), **Type** is set to *Up*, and **Inversion** is set to 0, the Arpeggiator output is 1 - 2 - 3 - repeat.
- If the arpeggiator sequence consists of a 3 note cycle (1 - 2 - 3), **Type** is set to *Up*, and **Inversion** is set to 1, the Arpeggiator output is 1 - 2 - 3 - 2 - 3 - repeat.
- If the arpeggiator sequence consists of a 3 note cycle (1 - 2 - 3), **Type** is set to *Up*, and **Inversion** is set to 2, the Arpeggiator output is 1 - 2 - 3 - (2 - 3 - 1 octave up) - (3 - 1 - 2 octave up) - repeat.

15.9 Setting the Range Parameters

The **RANGE** parameters **Min. Key** and **Max. Key** allow you to change the range of keys that trigger the arpeggiator sequence.

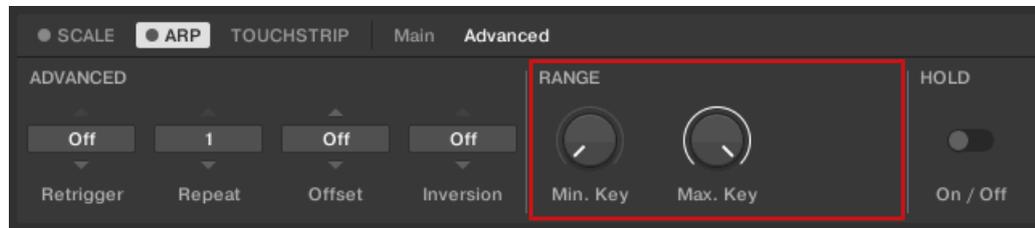

The **RANGE** parameters **Min. Key** and **Max. Key**.

15.9.1 Range Min. Key

The first **RANGE** parameter, **Min. Key**, is only available in *Arp* mode. On the keyboard, it is mapped to Knob 5 of the Control section when page 2 is selected in Arp Edit mode. **Min. Key** sets the lowest key that can be used as an input for the arpeggiator sequence.



The Arpeggiator can still generate pitches below the **Min. Key** setting.


15.9.2 Range Max. Key

The second **RANGE** parameter, **Max. Key**, is only available in *Arp* mode. On the keyboard, it is mapped to Knob 6 of the Control section when page 2 is selected in Arp Edit mode. **Max. Key** sets the highest key that can be used as an input for the arpeggiator sequence.



The Arpeggiator can still generate pitches above the **Max. Key** setting.

15.10 Setting the Hold Parameter

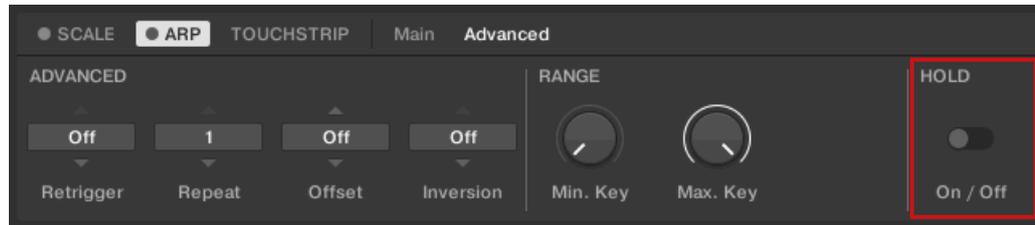

The **HOLD** parameter *On / Off*.

The **HOLD** parameter *On/Off* is available in both *Arp* and *Note Repeat* mode. On the keyboard, it is mapped to Button 3 of the Control section in Arp Edit mode. The **HOLD** function allows you to latch the notes played by the Arpeggiator. When set to *On*, the Arpeggiator will continuously play a sequence according to the last pressed keys on the keyboard.

HOLD On/Off is a switch control that lets you select the values *On* and *Off*.

1. Pressing any key while **HOLD** is *On* will set a new sequence.
2. To stop the Arpeggiator playback, set the **HOLD** parameter to *Off*.



Alternatively, you can switch the Arpeggiator completely off to stop playback by pressing **ARP (Edit)** in the keyboard's **PERFORM** section. When you switch the Arpeggiator back on, **HOLD** will still be active and you can continue to play latched note sequences with the Arpeggiator.

Index

Numerics

4-D encoder [60]

A

Accessibility [15]

activate speech output [18]

feature overview [19]

keyboard overview [15]

Training mode [19]

ARP (Edit) button [56]

Arpeggiator [217]

advanced parameters [224]

Dynamic [224]

editing [217]

Gate [224]

Gate Reset [224]

Groove [222]

Hold [228]

Inversion [226]

Main [218]

Main mode [218]

Main type [219]

Max. Key [227]

Min. Key [227]

note value [220]

Octaves [223]

Offset [226]
Other [222]
playing sequences [215]
Range [223] [226]
rate [220]
Repeat [225]
Retrigger [225]
rhythm [219] [221]
Sequence [221]
sustain pedal control [215]
Swing [222]
tempo [220]
Velocity [224]

Arpeggiator Mode

Note Repeat [218]

Arpeggiator sequence [193] [217]

Arpeggiator Snapshots [216]

ASIO driver [76]

Audio driver (selecting) [75]

Audio interface

selecting and outputs [74]

settings [74]

Auditioning Preset files [158]

AUTO button [56]

Automatically assigned controls [188]

B

Browser [39]

Files pane [47]

in the displays [135]

Library pane [43]

Product selector [45]

showing and hiding [134]

Browsing

choosing factory or user content [136]

displaying Preset file information [157]

filtering by Bank [141]

filtering by TYPES and MODES [147]

loading Products [137]

performing a text search [157]

Product types [132]

resetting the instrument selection [143]

TYPES and MODES tag filters [144]

C

Chord mode [207]

Chord position [213]

Chord type [209]

chromatic Scale [211]

Chords [193]

Chord Set [207]

editing Chords [196]

Generating [207] [209] [213]

Harmonizer [207]

playing Chords [195]

Chromatic Scale [211]

Content selector [43]

Control section [58]

Controlling Instrument and Effect parameters
[188]

about pre-mapped Instruments and Effects
[188]

adjusting parameters [188]

customizing parameter mappings [189]

Controlling Instrument Parameters

switching parameter pages [189]

D

Driver

selecting an audio driver [75]

E

Effects [160]

bypassing [167]

reordering [165]

F

Favorites

adding [152]

displaying [154]

removing [155]

working with Favorites [151]

Files pane [47]

additional Results list features [178]

Control bar [48]

Favortie bar [47]

IMPORT button [48]

Information button [48]

Location bar [48]

navigating file locations [179]

Recent Locations button [48]

Results list [48]

working with the Files pane [177]

FIXED VEL (TS Mode) button [64]

H

Header

CPU meter [41]

Keyboard button [41]

Main menu [40]

Master Volume control [41]

MIDI Assignment Editor button [41]

NI logo [41]

Perform panel button [40]

Plug-in chain panel button [40]

Plug-in panel button [40]

Power button [40]

Preset display [40]

Tempo control [41]

Transport controls [41]

View button [40]

Host automation [92]

recording Automation [93]

Host Control [57]

Host Integration [111]

advanced integration control functions
(MASCHINE) [115]

basic control functions (MASCHINE) [112]

integration with Ableton Live [126]

integration with Apple GarageBand [123]

integration with Apple Logic Pro X [123]

integration with MASCHINE [111]

integration with Steinberg Cubase/Nuendo
[129]

setting up [28]

setting up Ableton Live on macOS [30]

setting up Ableton Live on Windows [32]

setting up Apple GarageBand [29]

setting up Apple Logic ProX [29]

setting up Steinberg Cubase/Nuendo [29]

supported hosts [28] [111]

Host Transport Control [57]

I

IMPORT button [187]

Importing KOMPLETE KONTROL-Compatible User Files [186]

INSTANCE button [96]

Instances

automatic switching [69]

switching [69]

Instrument Views [65]

Additional View [66]

Default View [66]

Edit View [68]

K

Keyboard

controls [53]

overview [53]

Keyboard LEDs [61]

Keyboard overview [53]

Arrange buttons [54]

Buttons 1-8 [58]

Control section [54]

displays [58]

Kensington Lock [55]

keybed [54]

Knobs 1-8 [58]

Light Guide [54]

MIDI IN/OUT socket [55]

Navigation and Mode buttons [54]

Pedal A and Pedal B sockets [55]

Pedals: Pedal A and Pedal B sockets [55]

Perform and Edit section [54]

Pitch & Modulation Wheels [54]

Power button [55]

Preset and Page buttons [54]

PSU socket [55]

Solo and Mute buttons [54]

Touch Strip [54]

Transport section [53]

Transpose and Fixed Velocity buttons [54]

USB connector [55]

Keyboard settings [88]

KOMPLETE KONTROL

key features [22]

setting up [24]

Workflow [22]

L

Latency [76]

LEDs

Keybed [61]

Light Guide [61]

Library [133]

importing your own files [186]

organizing [171]

saving Preset files [171]

tags [133]

Library pane [43]

Content selector [43]

Control bar [44]

EDIT button [44]

Favorites [44]

Information button [44]

Library [43]

MODEs filter [44]

Prehear controls [44]

Product selector [44] [45]

Product Type icon [43]

Results list [44]

Search field [44]

TYPES filter [44]

Light Guide [61]

LEDs [61]

Loading a Plug-in in default state [89]

Location bar

navigating file locations [179]

Locations bar

adding and removing file location favorites
[181]

jumping to file location favorites [181]

navigating to recent file locations [180]

LOOP button [57]

M

Master Volume

- adjusting in the software [73]
- adjusting with the Keyboard [73]

Master Volume control [41]

METRO button [57]

MIDI

- automation [92]
- configuration [77]
- connecting external equipment [37]
- Controlling MIDI applications and devices [91]
- controlling parameters via [92]
- incoming MIDI [91]
- MIDI Assignment editor [50]
- MIDI Button [59]
- MIDI communication [91]
- MIDI message types [104]
- outgoing MIDI [91]
- receiving MIDI clock [91]
- routing and recording processed MIDI notes [91]
- triggering MIDI instruments and recording MIDI notes [91]

MIDI Assignment editor

- assigning MIDI messages [102]

- renaming control elements [103]

MIDI Assignment editor [50] [99]

- assignments [100]
- opening [99]
- Pages [100]
- Templates [101]
- the mapping system [100]

MIDI message types

- assignments for Buttons [106]
- assignments for Knobs [105]
- assignments for Pedals (continuous) [110]
- assignments for Pedals (switch) [108]
- assignments for the Touch Strip [108]
- Type menu [104]

MIDI mode [96]

- MIDI assignment [97]
- switching to MIDI mode [96]

Mode Buttons

- BROWSER button [59]
- INSTANCE button [59]
- MIDI button [59]
- MIXER button [59]
- PLUG-IN button [59]
- SETUP button [59]

MODES filter [44]

Modulation Wheels [62]

Modulation Wheel [62]

Pitch Wheel [62]

Music theory

Arpeggiator sequence [193]

Chords [193]

Scales [192]

N**Native Kontrol Standard** [183]**NKS**

installing KONTAKT and REAKTOR Instruments with NKS Support [184]

installing NKS Instruments [183]

installing VST Plug-ins with NKS support [184]

Note Repeat mode [218]**O****OCTAVE (Semi) down button** [64]**OCTAVE (Semi) up button** [64]**P****Pedals**

configuring pedal inputs (expression) [35]

configuring pedal inputs (sustain) [34]

connecting pedals [34]

Perform and Edit Section [56]**Perform panel** [48]

overview [48]

Scale [192]

PLAY (Restart) button [57]**Plug-in area** [52]**Plug-in chain**

bypassing Effects [167]

Plug-in chain [50]

Plug-in slot [50]

removing Effects [169]

reordering Effects [165]

scrolling [166]

selecting Plug-in slots [164]

Plug-in chain panel [49]

opening [160]

overview [49]

Plug-in chain [50]

Plug-in slot [50]

Plug-in panel [49]

Edit mode [189]

overview [49]

Plug-in slot [50]

Plug-ins

Loading a Plug-in in default state [89]

Preferences [73]

Audio page [74]

Audio Routings [74]

General page [78]

Library page [80]

MIDI page [77]

Plug-ins page [85]

Usage Data Tracking [78]

Prehearing Preset files [158]

Pre-mapped Instruments [188]

Preset files

deleting user Preset files [173]

finding [133]

managing [171]

organizing [133]

saving to the Library [171]

saving user Preset files [172]

Product selector [44] [45]

Category/Vendor selector [46]

Product selector header [45]

Product list [46]

Product types

Instrument and Effect [132]

Q

QUANTIZE button [56]

R

REC (Count-in) button [57]

Removing Effects [169]

Reordering Effects [165]

Resetting the clock

from the Keyboard [72]

in the software [72]

Results list [44]

Root Note [197]

S

Sample rate

selecting [75]

Scale [192]

available Scale parameters [196]

Chord [207]

Chord mode [207]

Chord Position [213]

Chord Type [209]

editing Scales [196]

Key mode [205]

playing a Scale [194]

Root Note [197]

Scale [197]

Scale type [198]

SCALE (Edit) button [56]

Scale engine [192]

activating [193]

Scale Type [198]

chromatic [211]

Scales [192]

Searching

Preset files [133]

Setting up

connecting the keyboard to the computer
[25]

Host integration [28]

Stand-alone application [26]

SHIFT button [56]

Software Overview [39]

Browser [39] [42]

Header [39] [40]

MIDI Assignment editor [50]

Plugin- area [39]

Plug-in area [52]

Soundcard

output routing [74]

settings [74]

Stand-alone application

Setting up [26]

STOP button [57]

Switching Instances [69]

T

Tags

categories of [133]

using tags to find Preset files [133]

Tempo

adjusting Tempo from the keyboard [72]

adjusting Tempo in the software [72]

TEMPO button [57]

Text search [157]

Touch Strip [63]

Transport and Tempo controls [71]

Play button [71]

Reset button [71]

Tempo control [71]

TRANSPORT section [57]

TYPES and MODES

selecting multiple tags from the same level
[151]

TYPES filter [44]

U

Usage Data Tracking

enabling/disabling [79]

User Library

adding folders [84]

removing folders [84]

User Preset files

deleting [173]

editing tags and properties [174]

saving [172]

V

Volume Control [41]

VST plug-ins [85] [182]

loading [182]

managing [85]